

Supplementary information

**A rapid and facile method for measuring corrosion rates using dynamic
light scattering**

Jinmyoung Joo,^a Hyejung Seo,^a Changho Chun,^a Kunwoo Han,^b Hwankyo Jung,^c Sungjee
Kim^d and Sangmin Jeon^{*a}


^a *Department of Chemical Engineering, Pohang University of Science and Technology
(POSTECH), Pohang, Korea*

^b *Research Institute of Industrial Science and Technology (RIST), Pohang, Korea*

^c *Technical Research Laboratory, POSCO, Pohang, Korea*

^d *Department of Chemistry, Pohang University of Science and Technology, Pohang, Korea*

Figure S1. The size distributions of (a) Cr0-55, (b) Cr0-110, and (c) Cr0-210 as a function of time.

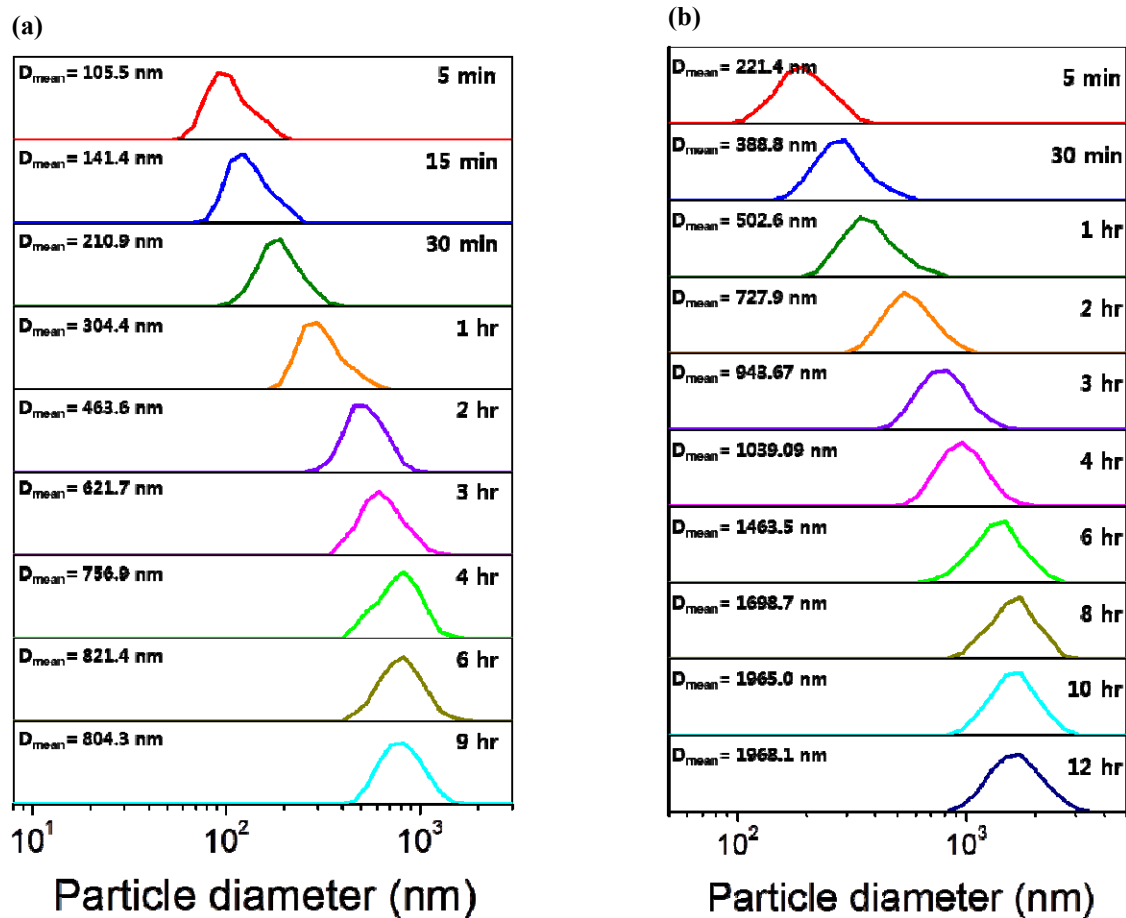

(c)

