

Supporting Information: 3D printing fluorinated energetic nanocomposites: Effects of poly(methyl methacrylate) addition on processability and thermal performance of aluminum-poly(vinylidene fluoride) blends

Jose A. Bencomo^a, Scott T. Iacono^b and Jena McCollum^{*a}

^a Department of Mechanical and Aerospace Engineering, University of Colorado Colorado Springs, Colorado Springs, USA

^b Department of Chemistry and Chemistry Research Center, United States Air Force Academy, Colorado Springs, USA

* Corresponding Author

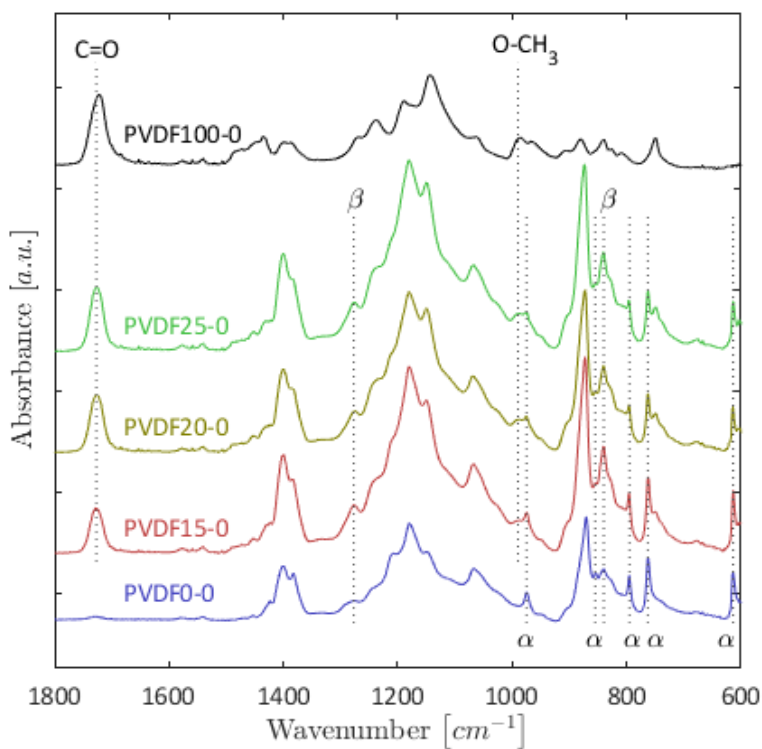


Figure S1 - FTIR spectra of pure PVDF, pure PMMA, and their blends.

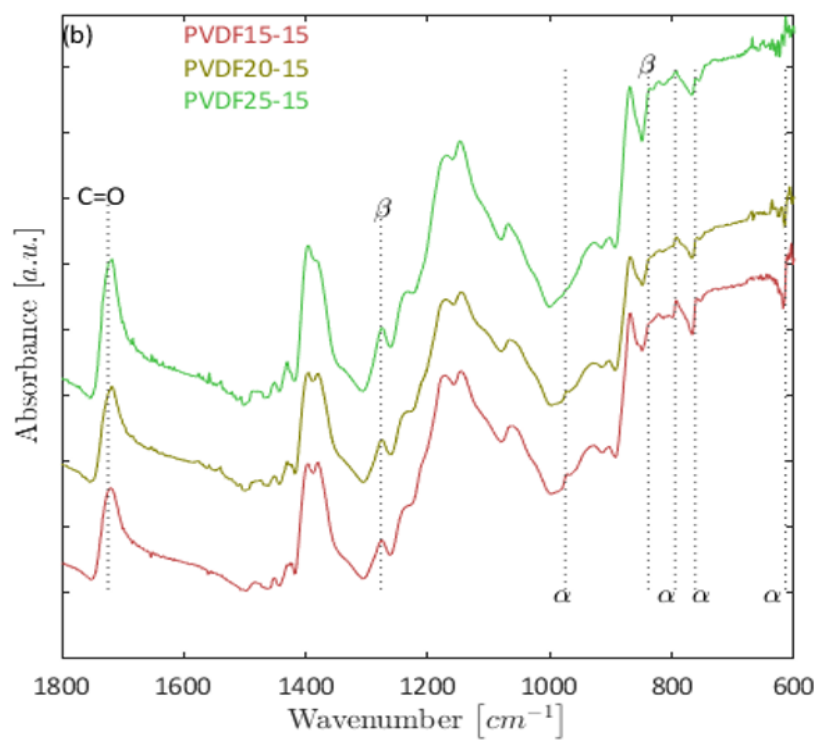
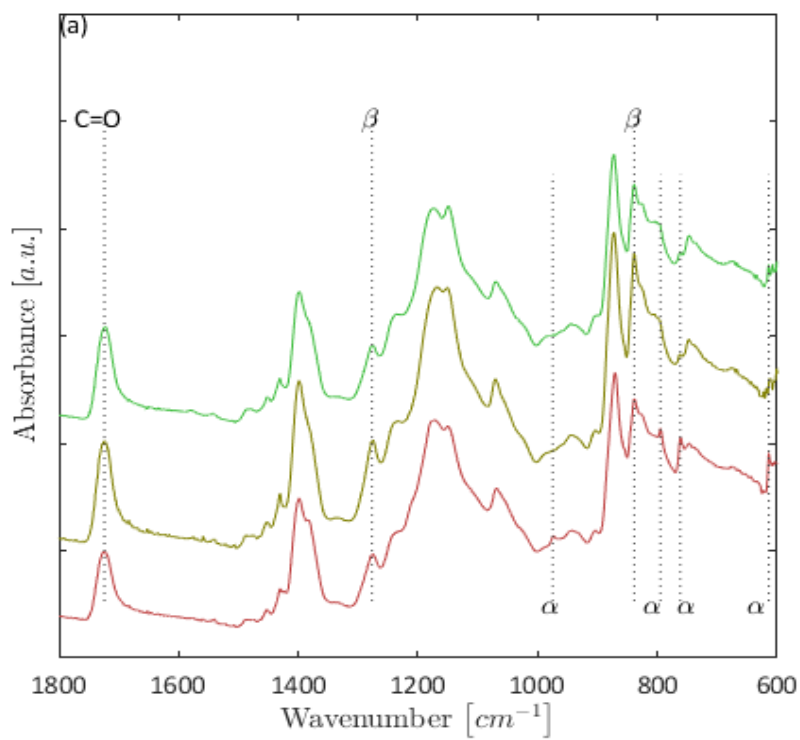


Figure S2 - FTIR spectra for PVDF/PMMA blends loaded with (a) 15 wt% and (b) 30 wt% Al.

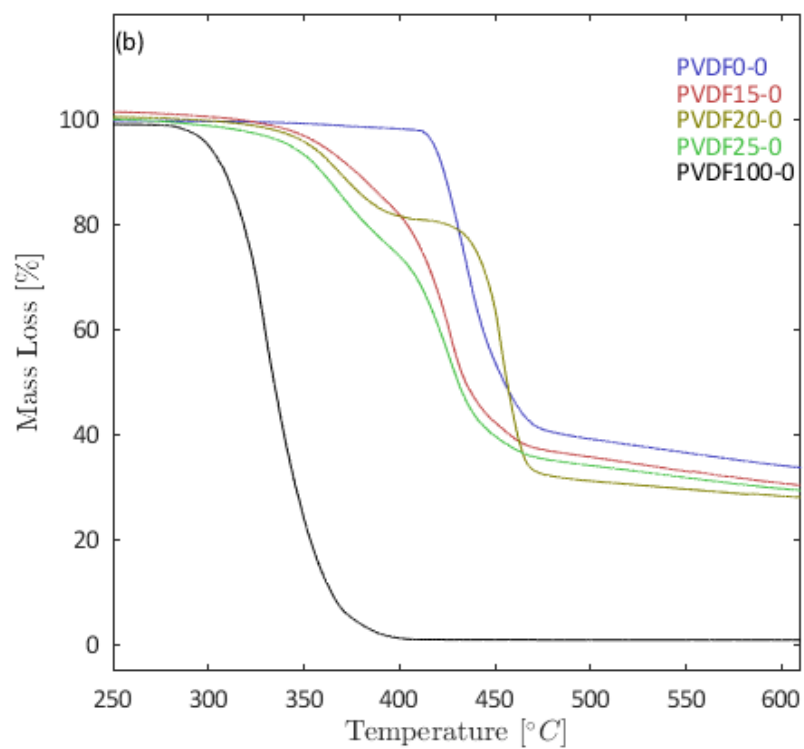
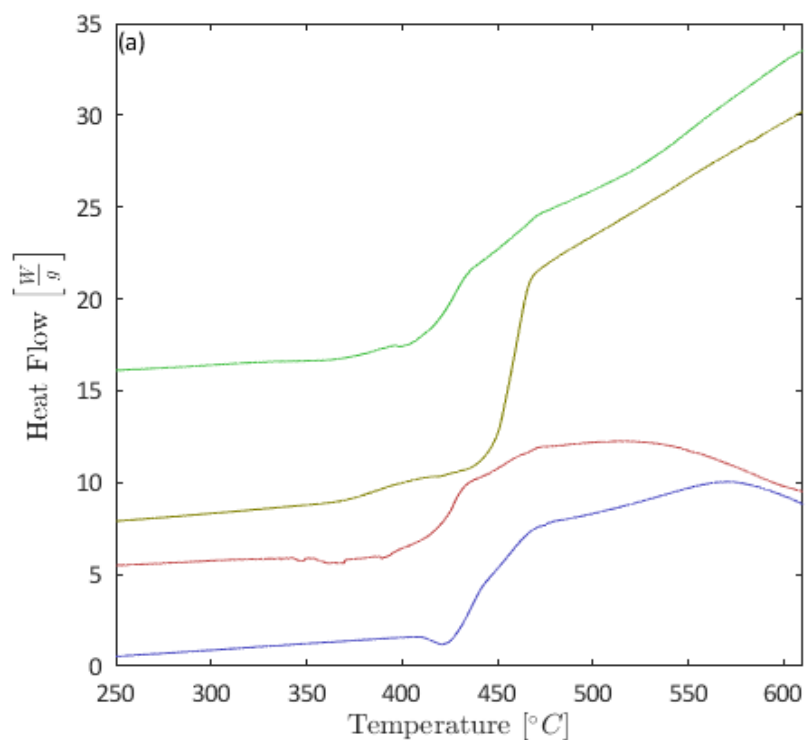


Figure S3 - Heat flow (a) and mass loss (b) curves for PVDF, PMMA, and their blends.

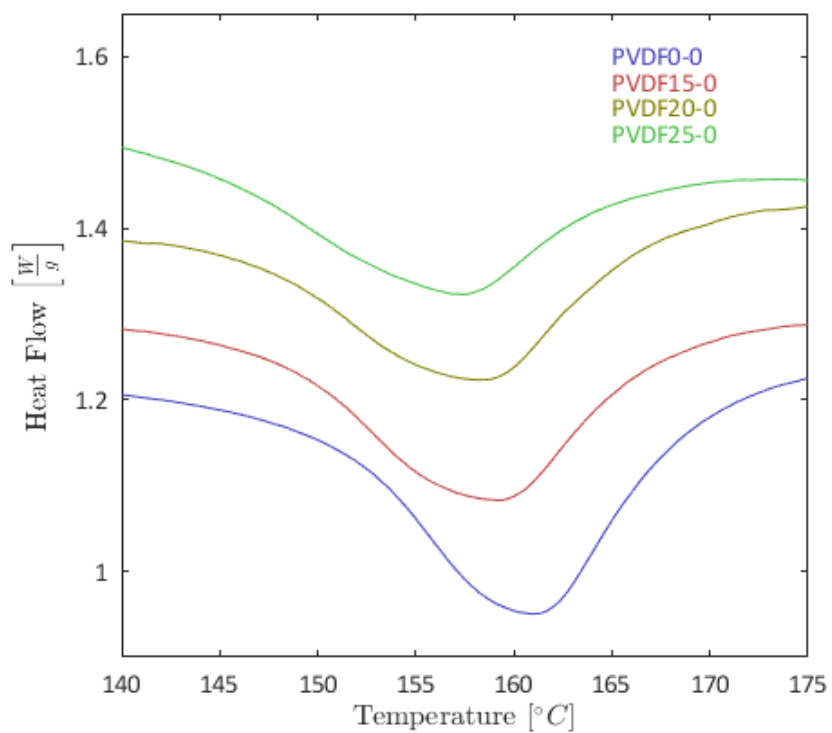


Figure S4 - Endothermic peaks indication PVDF melt.
