

Spraying distance and titanium chloride surface treatment effects on DSSCs performance of electro sprayed SnO₂ photoanodes

Shoyebmohamad F. Shaikh,^{a,b} Rajaram S. Mane,^a Oh-Shim Joo^{a,*}

^a Clean Energy Research Center, Korea Institute of Science and Technology, Seoul 130-650, Republic of Korea

^b Korea University of Science and Technology, 52 Eoeun dong, Yuseong-gu, Daejeon 305-333, Republic of Korea.

Electronic Supplementary Information-

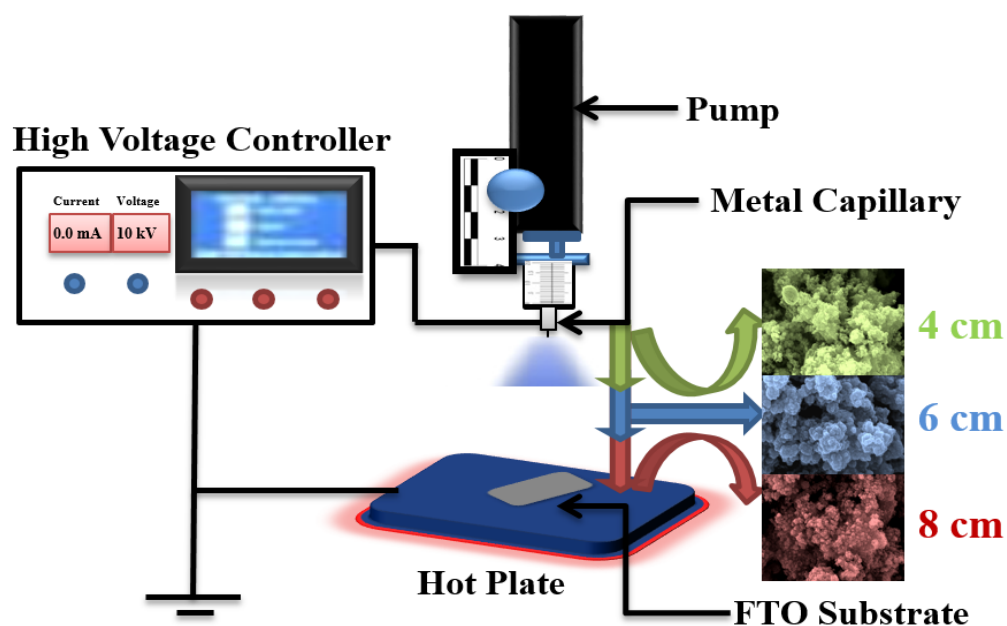


Fig S1 and effect of distance between metal capillary and FTO substrate on SnO₂ photoanode morphology.

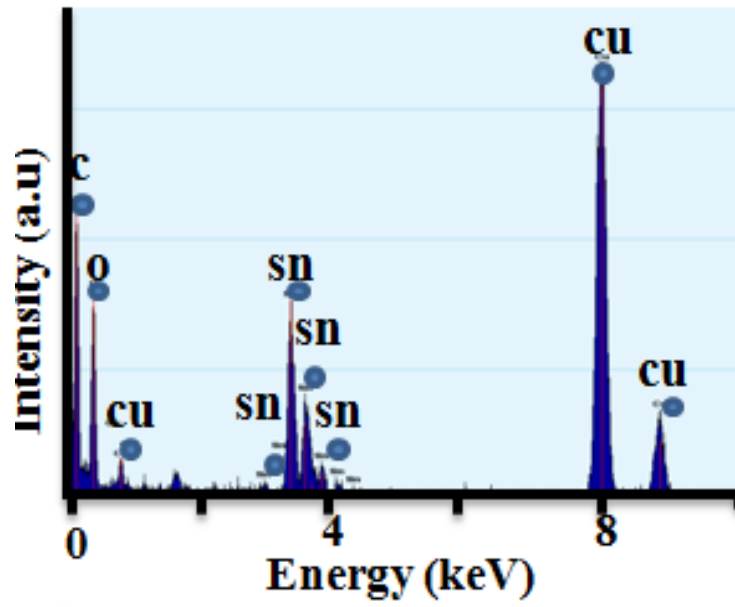


Fig S2: EDX mapping of SnO₂ photoanode obtained at 8 cm.

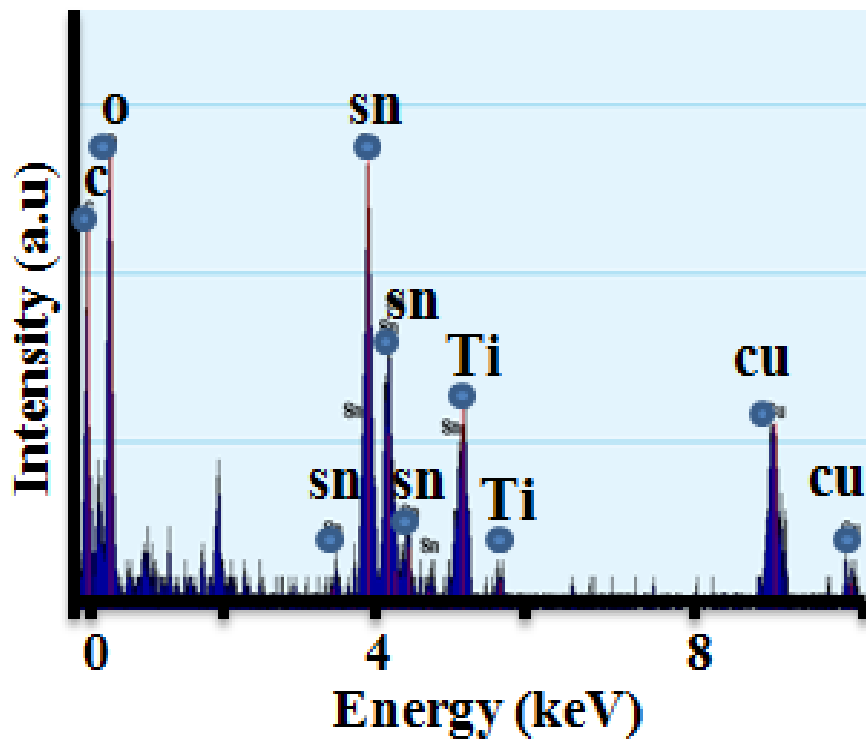


Fig S3: EDX mapping of SnO₂-TiO₂ photoanode