

Supporting Information

Nanopillar fillms with polyoxometalate-doped polyaniline for electrochemical detection of hydrogen peroxide

MinHo Yang,^a Dong Seok Kim,^b Jo Hee Yoon,^b Seok Bok Hong,^b Soon Woo Jeong,^a Dong Eun Yoo,^c Tae Jae Lee,^a
Seok Jae Lee,^{a,*} Kyoung G. Lee,^{a,*} Bong Gill Choi^{b,*}

^aDepartment of Nano Bio Research, National NanoFab Center (NNFC), Daejeon 34141, Republic of Korea

^bDepartment of Chemical Engineering, Kangwon National University, Samcheok 25913, Republic of Korea

*E-mail: bgchoi@kangwan.ac.kr

^cDevice Process Technology Team, National NanoFab Center (NNFC), Daejeon 34141, Republic of Korea

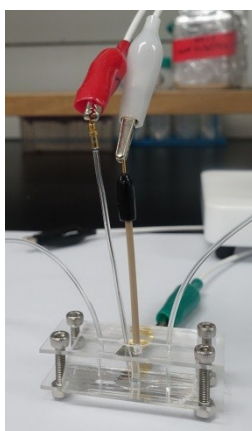


Figure S1. Photo of microfluidic cell for flow injection analysis.