



Supplementary Fig. S1. Schematic diagram of the proposed modification steps.

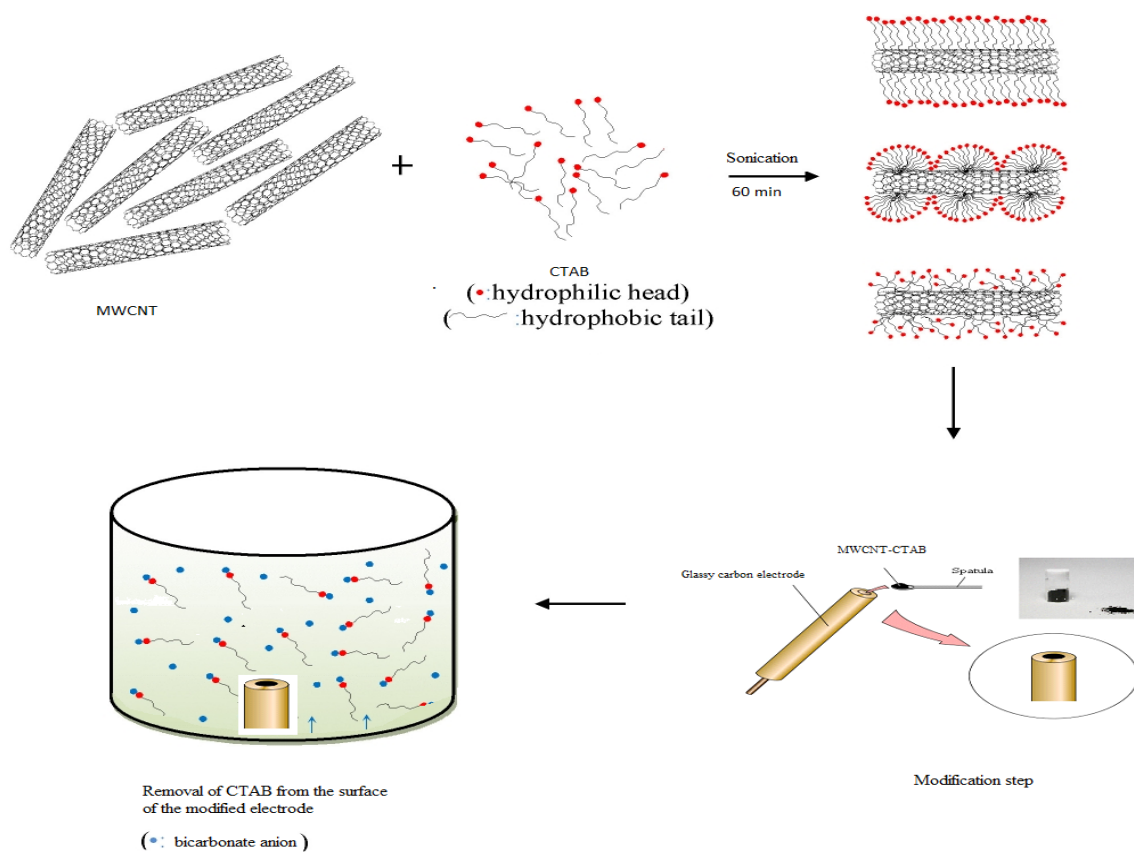

Supplementary Fig. S2. Effect of amount of MWCNT-CTAB suspension on response current of the sensor for 1.0 mM PCM.

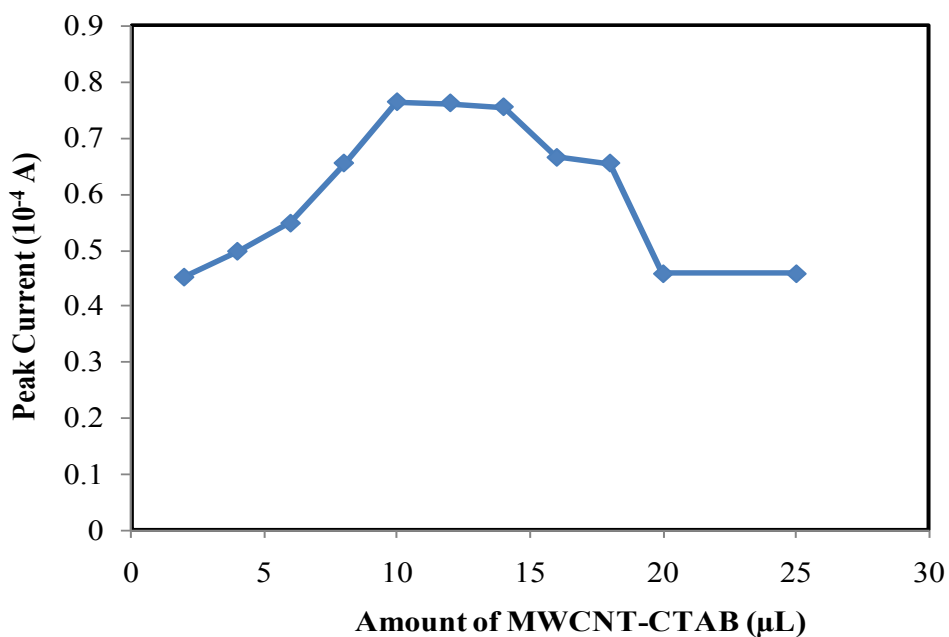

Supplementary Fig. S3. Relation between log peak current vs. log scan rate.

