

Supporting Information

Fabrication of Stretchable, Flexible Conductive Thermoplastic Polyurethane/Graphene Composites via Foaming

Yuejuan Chen,¹ Yang Li,¹ Donghua Xu,^{2*} Wentao Zhai^{1*}

1 Ningbo Key Lab of Polymer Materials, Ningbo Institute of Material Technology and Engineering, Chinese Academy of Sciences, Ningbo, Zhejiang Province, 315201, China. E-mail: wtzhai@nimte.ac.cn

2 State Key Lab of Polymer Physics and Chemistry, Changchun Institute of Applied Chemistry, Chinese Academy of Sciences, Changchun 130022, China. E-mail: dhxu@ciac.ac.cn

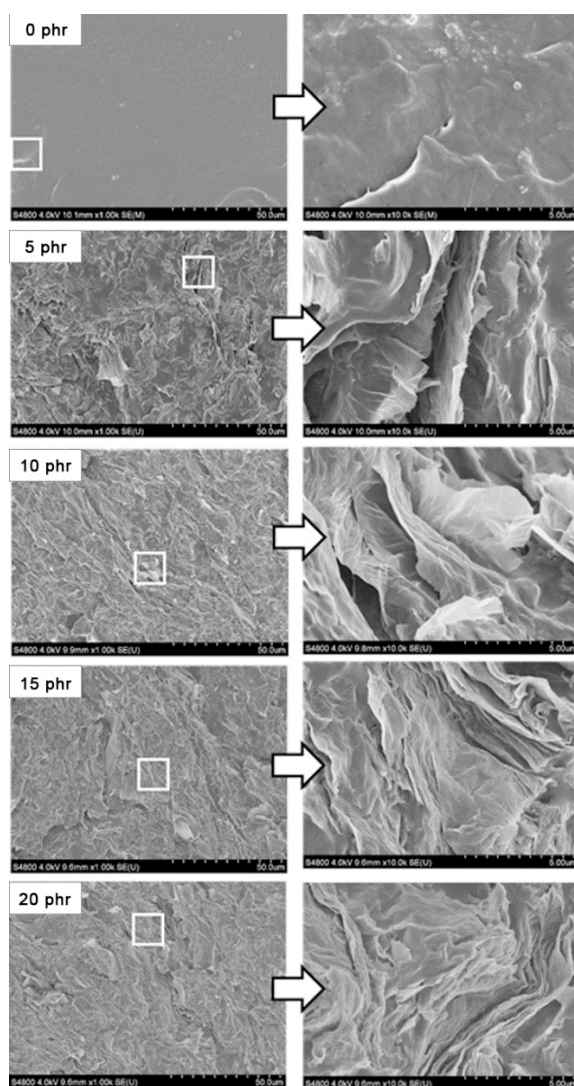


Fig. S1 SEM images of the cross-section of TPUG samples with varying graphene loading of 0, 5, 10, 15 and 20 phr. The images in higher magnification shows the presence of graphene sheets.