

**Supporting Information for**  
**Near-Field Electrospinning Enhances the Energy Harvesting of Hollow PVDF**  
**Piezoelectric Fibers**

Cheng-Tang Pan<sup>a</sup>, Chung-Kun Yen<sup>a</sup>, Shao-Yu Wang<sup>a</sup>, Yan-Cheng Lai<sup>a</sup>, Liwei Lin<sup>b</sup>,  
Jacob Chih-Ching Huang<sup>c</sup>, and Shiao-Wei Kuo<sup>c,\*</sup>

<sup>a</sup>Department of Mechanical and Electro-Mechanical Engineering, National Sun Yat-Sen University, Kaohsiung 80424, Taiwan

<sup>b</sup>Department of Mechanical Engineering, University of California, Berkeley, California 94720, USA

<sup>c</sup>Department of Materials and Optoelectronic Science, Center for Nanoscience and Nanotechnology, National Sun Yat-Sen University, Kaohsiung 80424, Taiwan

Table S1. PVDF solutions used in this study

PVDF		Solvent (DMSO/Acetone)		Surfactant	
Weight percentage (PVDF/Solvent)	Weight (g)	DMSO (g)	Acetone (g)	Weight percentage	Weight (g)
15%	0.75	2.5	2.5	5%	0.25
16%	0.8	2.5	2.5	5%	0.25
17%	0.85	2.5	2.5	5%	0.25
18%	0.9	2.5	2.5	5%	0.25
19%	0.95	2.5	2.5	5%	0.25

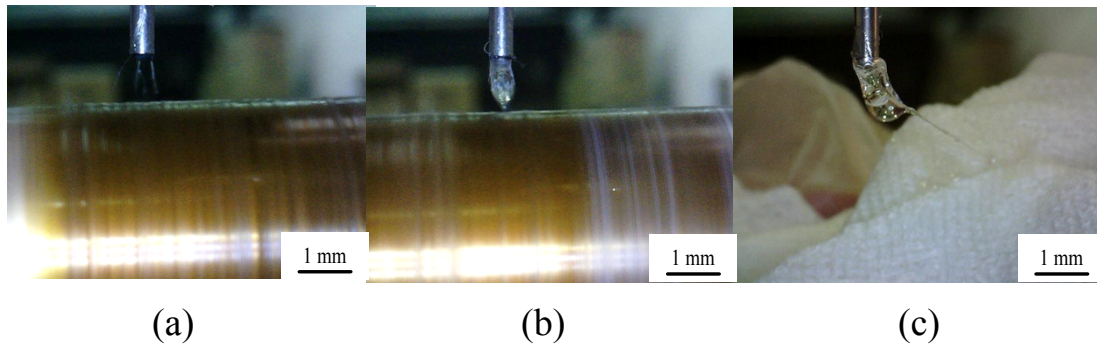


Figure S1. Electrospinning of fiber tubes failed when (a) the flow rate of the PVDF solution (outer needle) was less than 3mL/h, (b) the flow rate of the PVDF solution (outer needle) was greater than 3 mL/h, and (c) the flow rate of air (inner needle) was greater than 15 mL/h.