

Supporting Information

Integrated reduced graphene oxide multilayer /Li composite anode for rechargeable lithium metal batteries

Yi-jun Zhang, Xin-hui Xia, Dong-huang Wang, Xiu-li Wang, Chang-dong Gu, and
Jiang-ping Tu*

*State Key Laboratory of Silicon Materials, Key Laboratory of Advanced Materials and
Applications for Batteries of Zhejiang Province, and School of Materials Science and Engineering,
Zhejiang University, Hangzhou 310027, China*

*Corresponding author: Tel.: +86-571-87952856; Fax: +86-571-87952573.

E-mail address: tujp@zju.edu.cn; tujplab@zju.edu.cn (J.P. Tu)

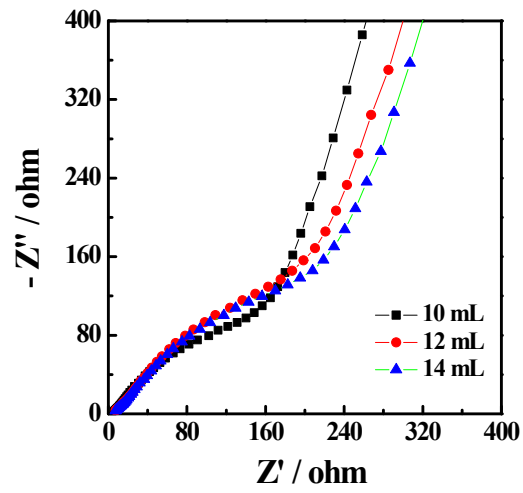


Figure S1. The Nyquist plots of Li/rGO anodes fabricated by different thickness of rGO film.

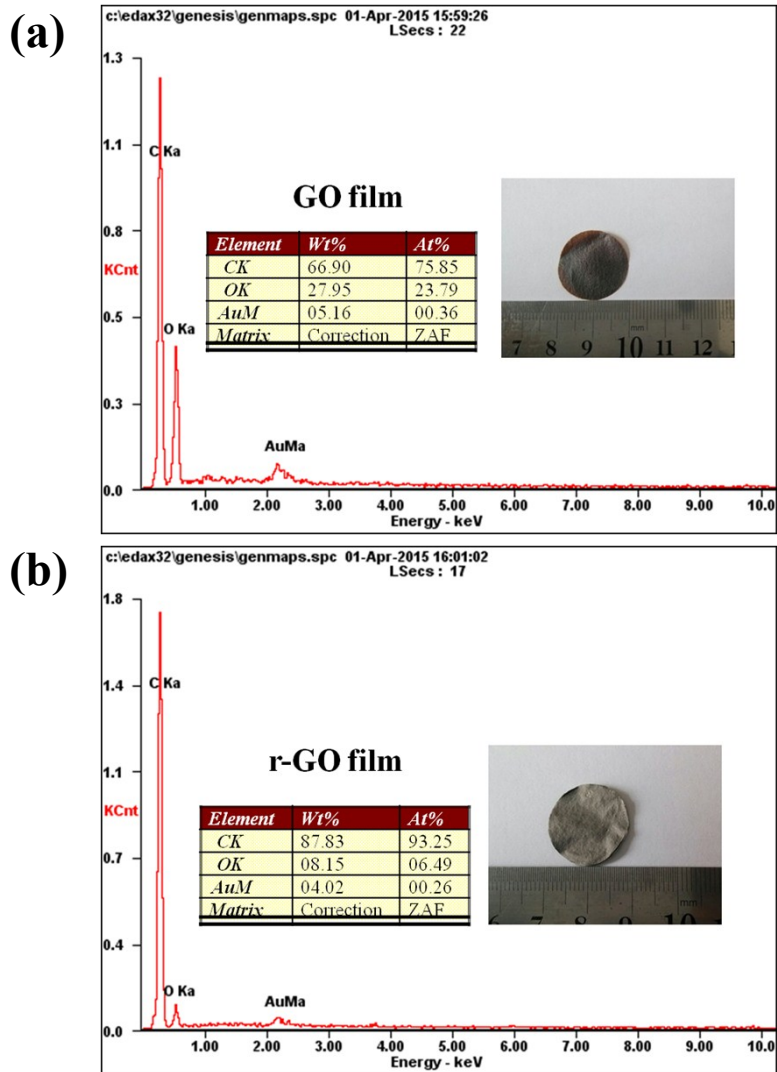


Figure S2. EDS mapping patterns and photographs of (a) GO and (b) rGO films.