

Supporting Information

Graphene Supported Polyimide Nanocomposite as a High Performance Organic Cathode Material for Lithium Ion Batteries

Aziz Ahmad, ^{a,c} Haiping Wu, ^a Yufen Guo, ^b Qinghai Meng, ^{a,c} Yuena Meng, ^a Kun Lu, ^a Liwei Liu, ^{*,b} and Zhixiang Wei, ^{*,a}

^aCAS Key Laboratory of Nanosystem and Hierarchical Fabrication, National Center for Nanoscience and Technology, Beiyitiao No. 11, Zhongguancun, Beijing 100190, China.

^bSuzhou Institute of Nano-Tech and Nano-Bionics, Chinese Academy of Sciences, Suzhou 215123, China

^cUniversity of Chinese Academy of Sciences, Beijing 100039, China

Corresponding author E-mail: weizx@nanoctr.cn; hwliu2007@sinano.ac.cn. Fax: +86-62656765; Tel: +86-82545565

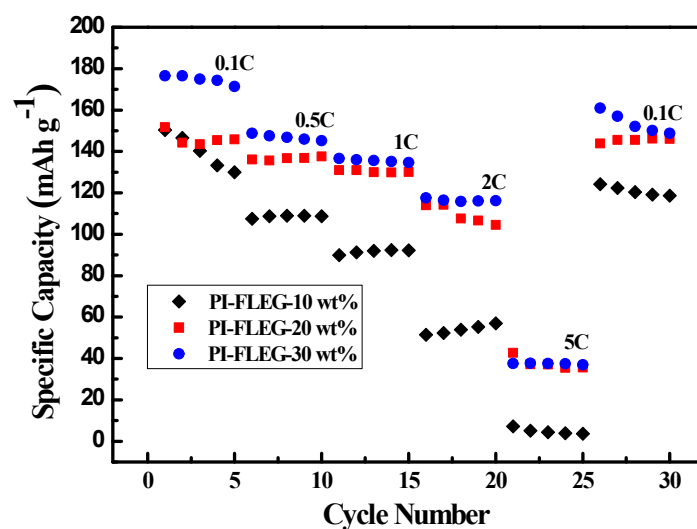


Figure S1. Rate Performance of PI-FLEG with variation of conductive carbon.

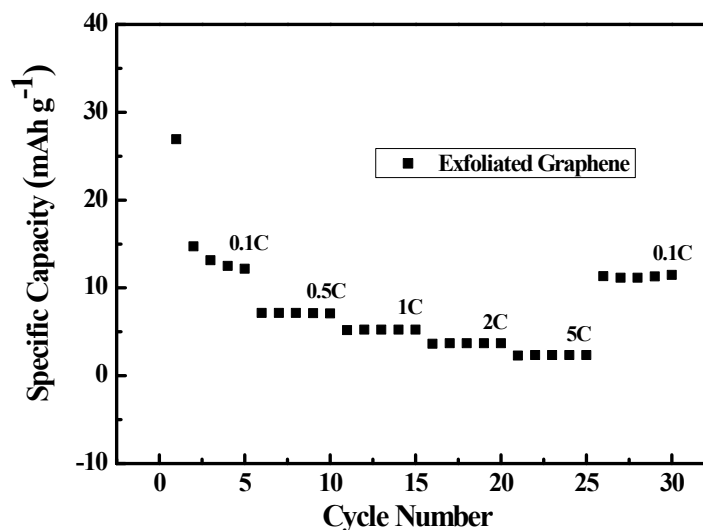


Figure S2. Rate performance of FLEG (1C=443 mA g⁻¹).

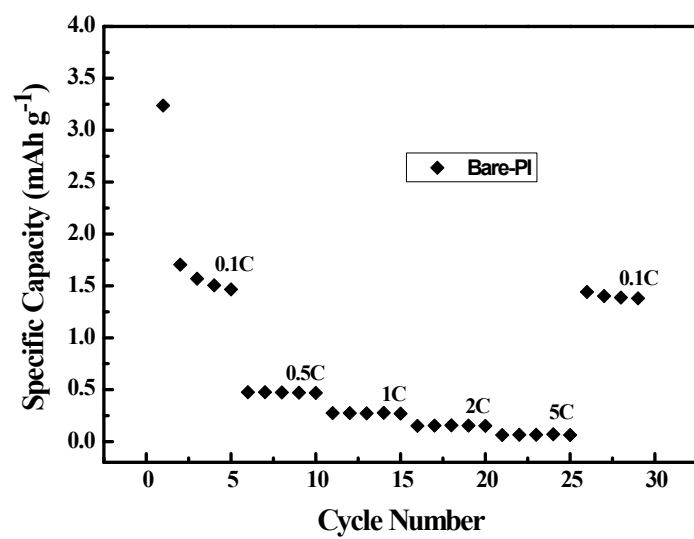


Figure S3. Rate performance of bare PI at various C-rates.