

Electronic Supplementary Information (ESI)

Highly efficient, stable and reproducible CdSe-sensitized solar cells using copper sulfide as counter electrodes

Hua Zhang, Huili Bao and Xinhua Zhong*

Shanghai Key Laboratory of Functional Materials Chemistry, Institute of Applied Chemistry,

East China University of Science and Technology, Shanghai 200237, China

Email: zhongxh@ecust.edu.cn

Fax: +86 21 6425 0281

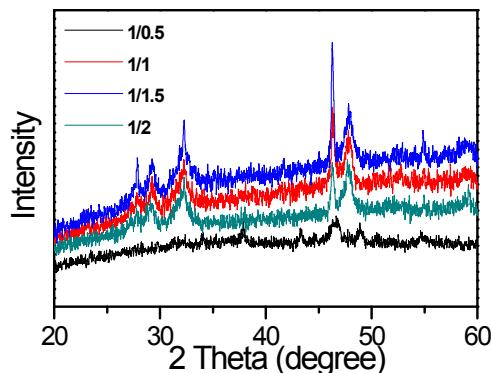


Fig. S1 XRD patterns of copper sulfide prepared at different Cu/S ratios

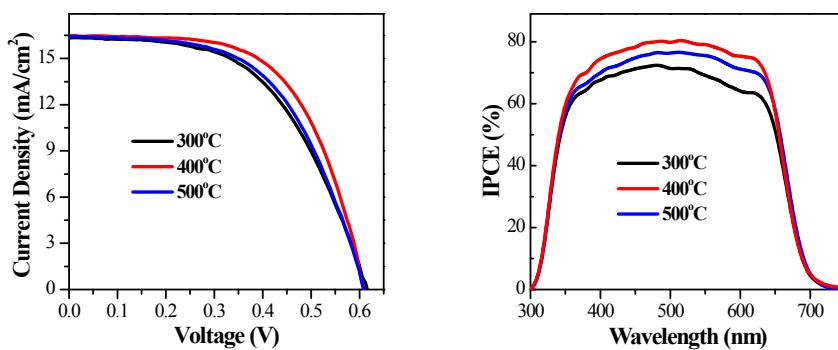


Fig. S2 *J-V* and IPCE of the cells sintered at different temperatures of 300, 400 and

500 °C

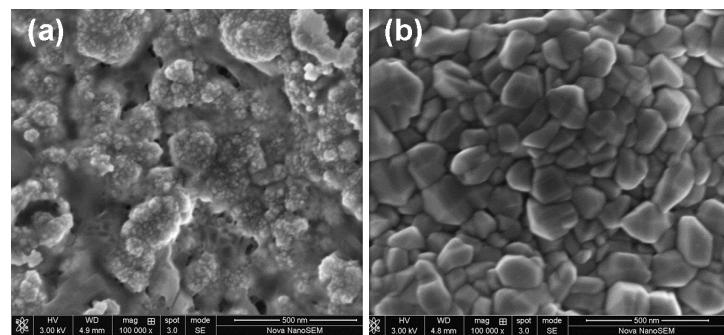


Fig. S3 SEM images of CEs sintered at (a) 300 °C (b) 400 °C