

Supporting Information


The effect of poling conditions on the performance of piezoelectric energy harvesters fabricated by wet chemistry

Erika M.A. Fuentes-Fernandez^a, Bruce E. Gnade^a, Manuel A. Quevedo-Lopez^a, Pradeep Shah^b, and H. N. Alshareef^{c*}


^aUniversity of Texas at Dallas, 800 W. Campbell Rd, Richardson, TX 75080

^bTexas Micro Power Inc., 7920 Beltline Rd, Suite 1005, Dallas TX 75254

^cKing Abdullah University of Science & Technology, Thuwal, Saudi Arabia 23955-6900

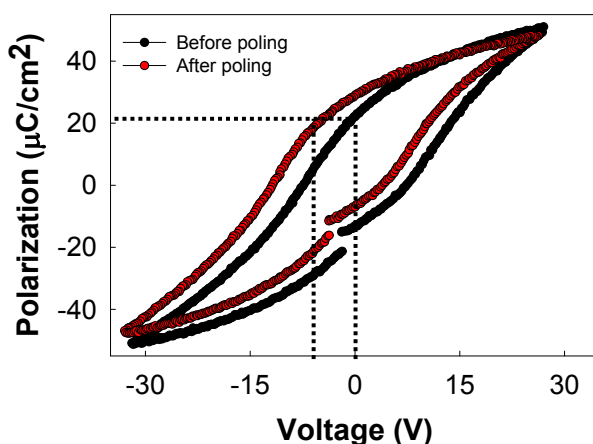

(a)

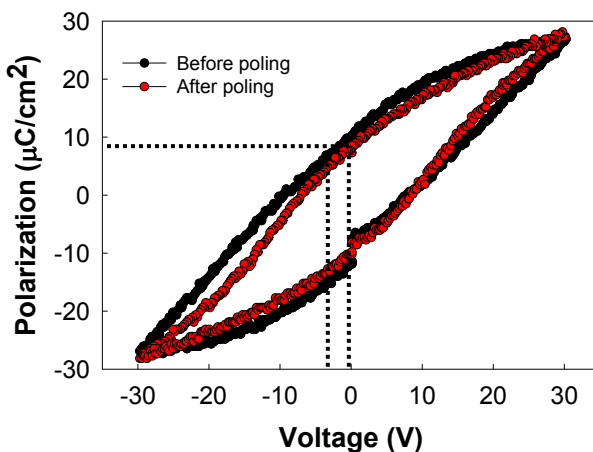

(b)

Figure S1: Hysteresis loops of (a) films poled under strong conditions, (200 kV/cm²/50 min/250°C) and (b) films poled under weaker conditions 200 kV/cm²/50 min/room temperature. The hysteresis loops also show a voltage shift along the x-axis after poling. However, it was

possible to measure this shift more accurately from the C-V curves, as discussed in the manuscript.