

Supporting Information

Improvement of the power conversion efficiency and long term stability of polymer solar cells by incorporation of amphiphilic Nafion doped PEDOT-PSS as hole extraction layer

Xuliang Hou^a, Qiuxiang Li^a, Tai Cheng^a, Lu Yu^a, Fuzhi Wang^{a,*}, Jun Lin^{a,*}, Songyuan Dai^a,
Yongfang Li^b, Zhan'ao Tan^{a,*}

^a Beijing Key Laboratory of Novel Thin Film Solar Cells, School of Renewable Energy, North China Electric Power University, Beijing 102206, China.

^b CAS Key Laboratory of Organic Solids, Institute of Chemistry, Chinese Academy of Sciences, Beijing 100190, China.

*Corresponding Authors

E-mail: tanzhanao@ncepu.edu.cn (Z. A. Tan), jun.lin@ncepu.edu.cn (J. Lin);
wfz501@ncepu.edu.cn (F. Z. Wang)

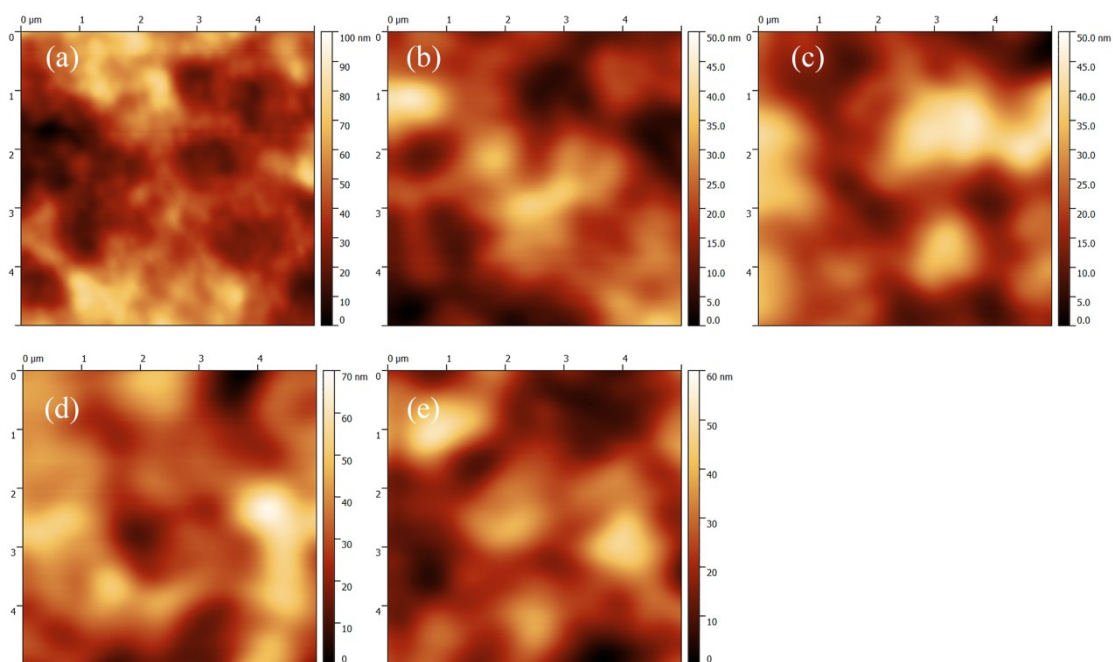


Figure S1. AFM height images of P3HT:PCBM films ($5 \times 5 \mu\text{m}$ size) on Nafion doped PEDOT-PSS (Nafion:PEDOT-PSS) film with the volume ratio of 0:1, 1:10, 1:5, 1:2 and 1:1.