

Electronic Supplementary Information

Highly efficient homojunction organic light-emitting diodes

Qiang Wang,^{*a} Yali Zhao,^a Panlong Qiu,^a Chao Wu,^a Jiangshan Chen^b and Dongge Ma^{*b}

^{a.} *School of Materials Science and Engineering, Shaanxi Normal University, Xi'an 710062, P. R. China.*

E-mail: qiangwang@snnu.edu.cn.

^{b.} *State Key Laboratory of Polymer Physics and Chemistry, Changchun Institute of Applied Chemistry, University of Chinese Academy of Sciences, Changchun 130022, P. R. China. E-mail:*

mdg1014@ciac.ac.cn.

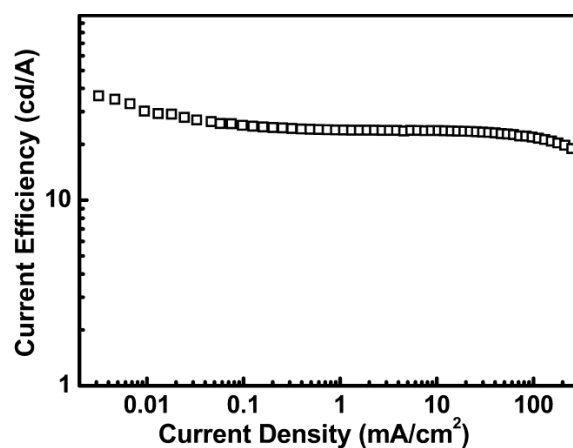


Fig. S1 Current efficiency versus current density of the blue *p-i-n* homojunction TOLED.

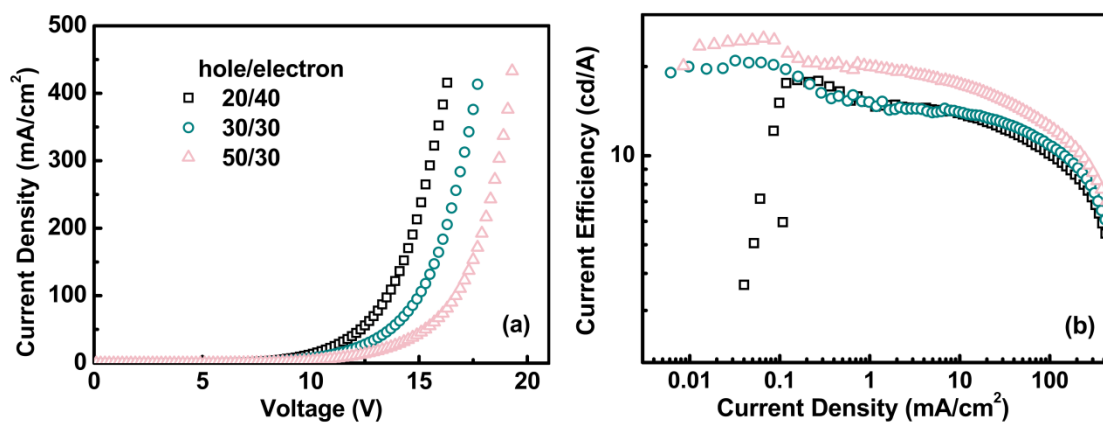


Fig. S2 (a) *J-V* and (b) current efficiency characteristics of the WOLEDs with different thicknesses of transport layers.

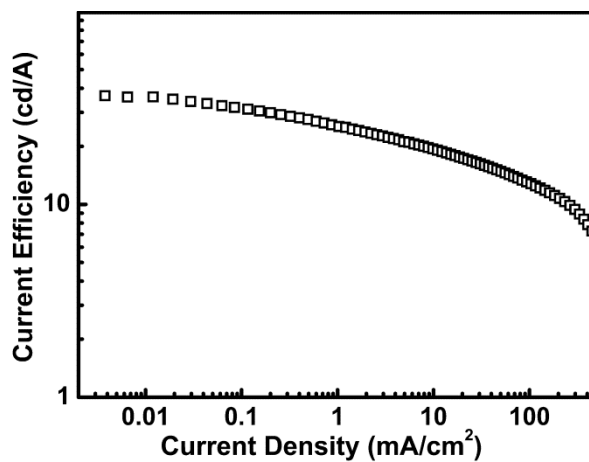


Fig. S3 Current efficiency versus current density of the optimized WOLED.