

Low Operating Temperature Toluene Sensor Based on Novel α - $\text{Fe}_2\text{O}_3/\text{SnO}_2$ Heterostructure Nanowires Arrays

Tianshuang Wang,^a Zhangshu Huang,^a Zhangduo Yu,^a Hui Wang,^b Peng Sun,^{*a} Hui Suo,^a Yuan Gao,^a Yanfeng Sun,^a Tie Li,^{*b} and Geyu Lu^a

^a State Key Laboratory on Integrated Optoelectronics, College of Electronic Science and Engineering, Jilin University, 2699 Qianjin Street, Changchun 130012, People's Republic of China. E-mail:

pengsun@jlu.edu.cn; Fax: +86 431 85167808; Tel: +86 431 85167808

^b Technology on Micro-system Laboratory, Shanghai Institute of Micro-system and Information

Technology, Chinese Academy of Sciences, 800 Yishan Road, Xuhui district, Shanghai 200030, People's Republic of China, Email: tli@mail.sim.ac.cn

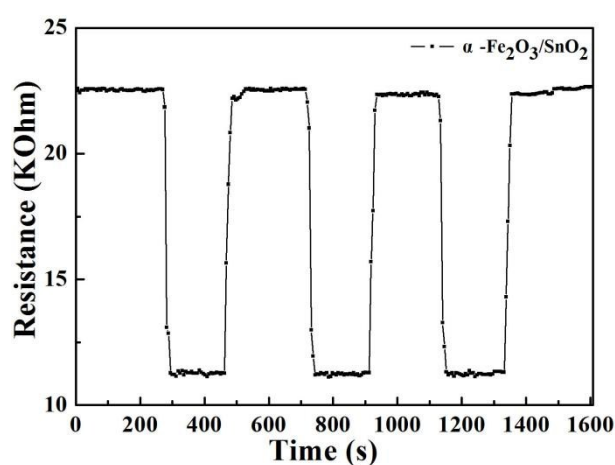


Fig.S1 The repeatability of the α - $\text{Fe}_2\text{O}_3/\text{SnO}_2$ heterostructure composites sensor toward 100 ppm toluene at 90 °C.