

SUPPLEMENTARY INFORMATION

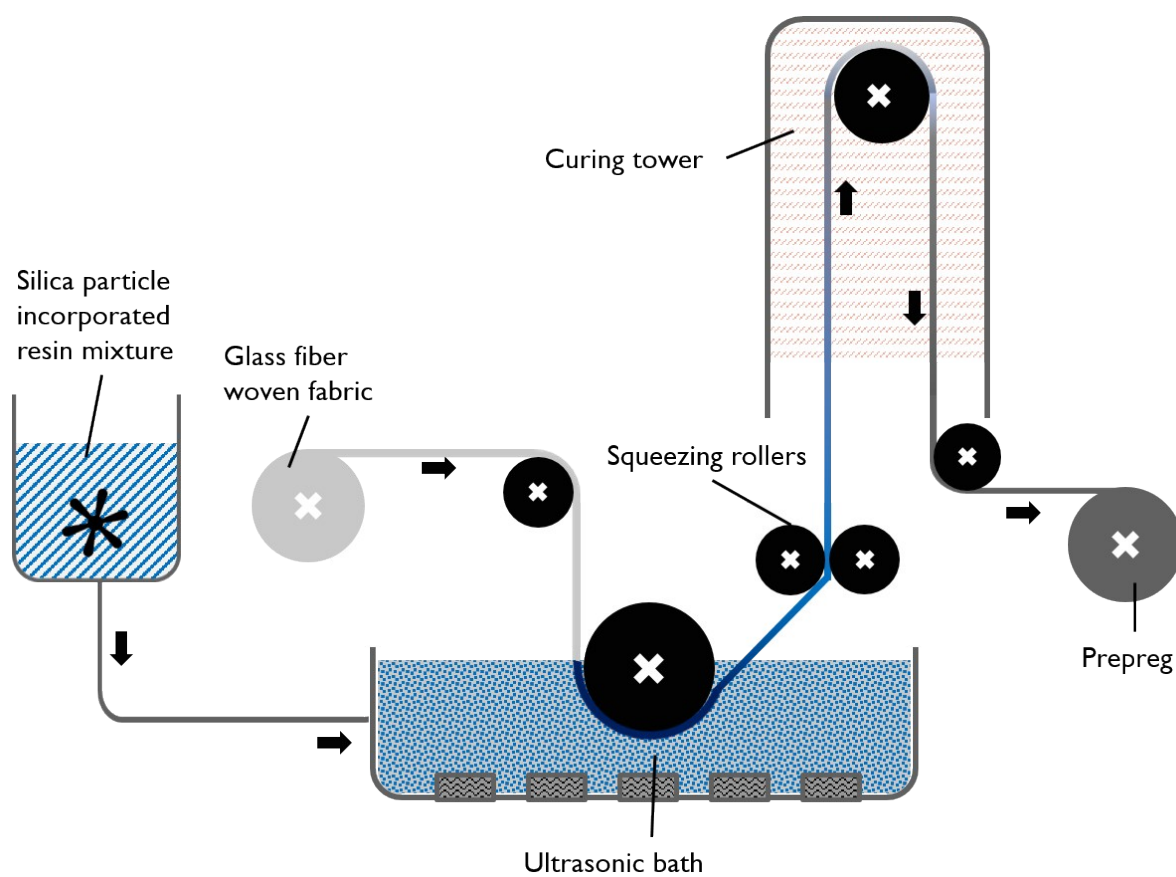


Figure S1. Schematic illustration of ultrasonic induced solvent impregnation process of silica bead incorporated epoxy/glass fibre prepreg.

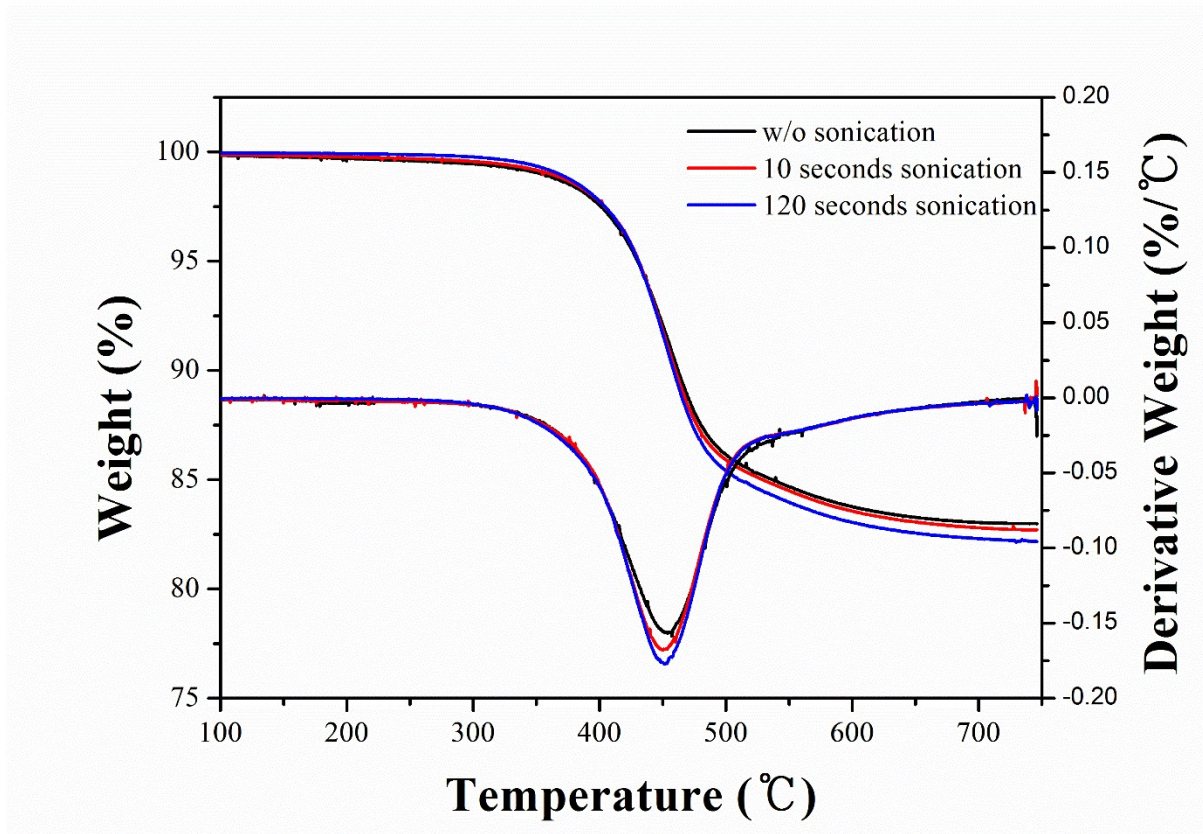


Figure S2. TGA curves of epoxy/glass fibre/bead composite laminate specimens w/o sonication, 10 sec sonication, and 120 sec sonication presenting similar residual weight.