

Supporting Information

High mobility transistors based on electrospray-printed small-molecule/polymer semiconducting blends

Charalampos Pitsalidis,^{a,d*} Anna Maria Pappa,^a Simon Hunter,^b Argyris Laskarakis,^a Tryfonas Kaimakamis,^a Marcia M. Payne,^c John E. Anthony,^c Thomas D. Anthopoulos,^b and Stergios Logothetidis^{a*}

^a. Laboratory for Thin Films, Nanosystems and Nanometrology, Aristotle University of Thessaloniki, Thessaloniki 54124, Greece.

^b. Blackett Laboratory, Department of Physics and Centre for Plastic Electronics, Imperial College London, London SW7 2AZ, United Kingdom.

^c. Department of Chemistry, University of Kentucky, Lexington, Kentucky 40506-0055, United States

^d. Institut FRESNEL - Faculte des Sciences de Saint Jérôme Avenue Escadrille Normandie-Niemen 13397 Marseille Cedex

*Corresponding authors: C. Pitsalidis (charalampos.pitsalidis@fresnel.fr), S. Logothetidis (logot@auth.gr)

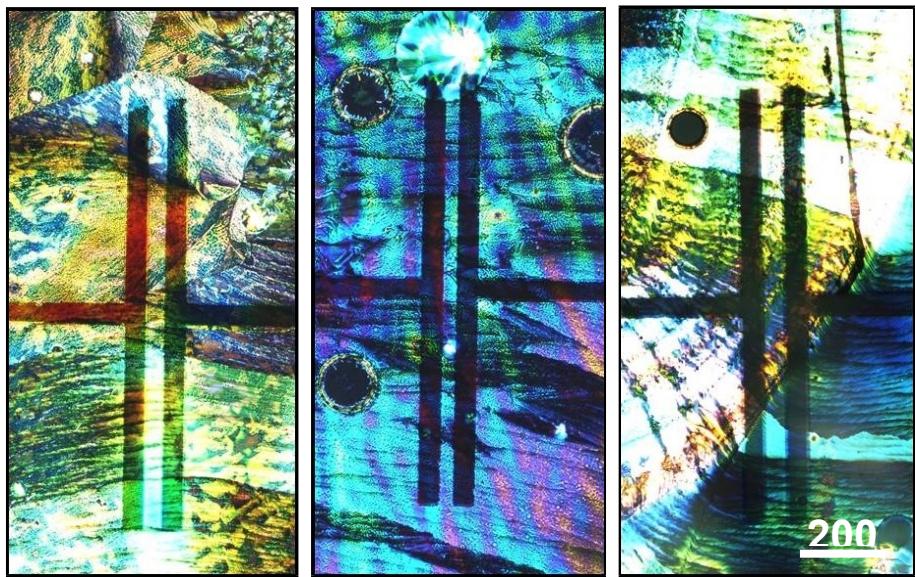


Fig. S1 POM images in the channel area of different airbrush sprayed OFETs.

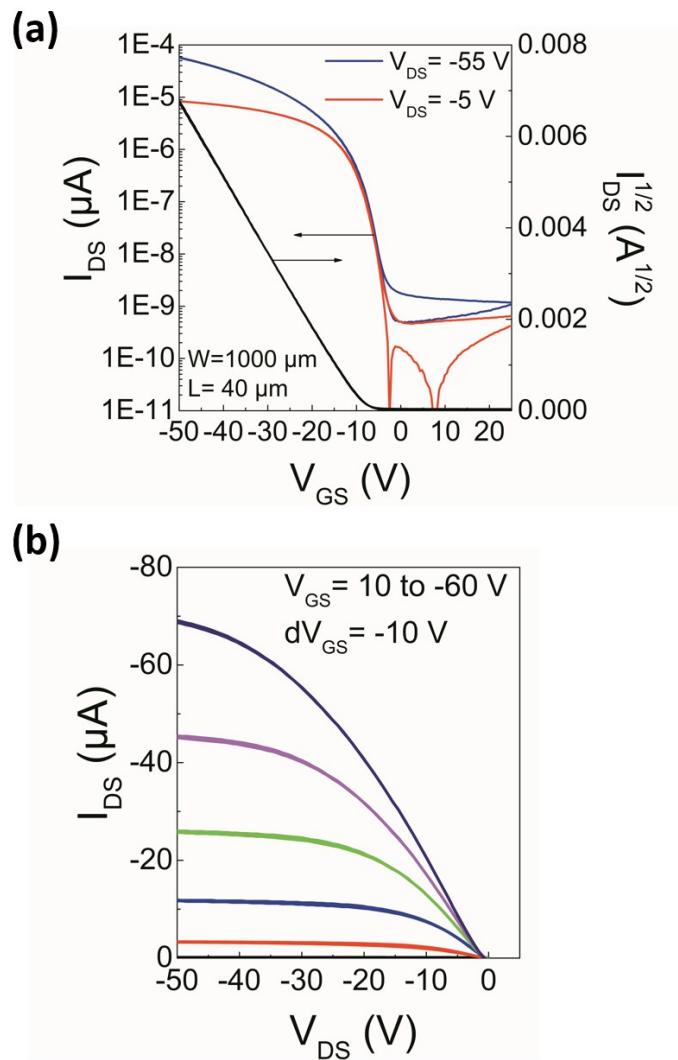


Fig. S2 (a) Transfer and (b) output characteristics of airbrush spray coated diF-TES-ADT:PTAA based OFET.

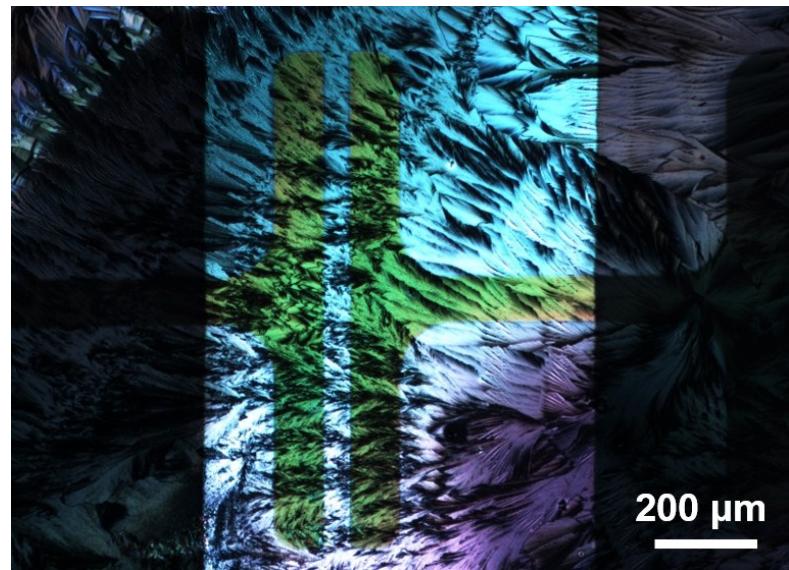


Fig. S3 Polarized optical microscope images in the channel area of an electrosprayed TIPS-PEN:PTAA OFET.

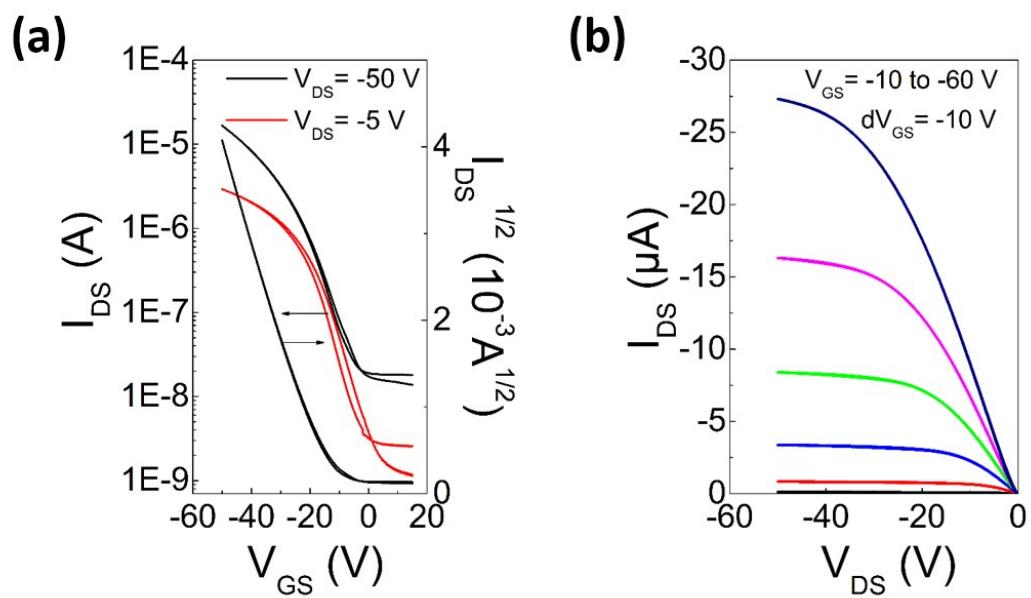


Fig. S4 Transfer (left) and output (right) characteristics TIPS-PEN:PTAA electrosprayed OFET.