

Supporting Information

Achieving Low Dielectric, Surface Free Energy and UV Shielding Green Nanocomposites via Reinforcing Bio-Silica Aerogel with Polybenzoxazine

P. Prabunathan^{a,b}, P.Thennarasu^a, J.K.Song^b and M. Alagar^{c,}*

Received (in XXX, XXX) XthXXXXXXXXXX 20XX, Accepted Xth XXXXXXXXXXXX 20XX

DOI: 10.1039/b000000x

^a *Department of Handloom and Textile Technology, Indian Institute of Handloom Technology Salem, Salem -636001.*

^b *Display Device and Material Lab, School of Electronic & Electrical Engineering, Sungkyunkwan University, Suwon 440-746, South Korea.*

^c *Centre of Excellence for Advanced Material Manufacturing, Processing and Characterization (CoExAMMPC), VFSTR University, Vadlamudi, Guntur-522 213, India.*

*E-mail: mkalagar@yahoo.com Fax: +91 4422359164; Tel: +91 4422359164.

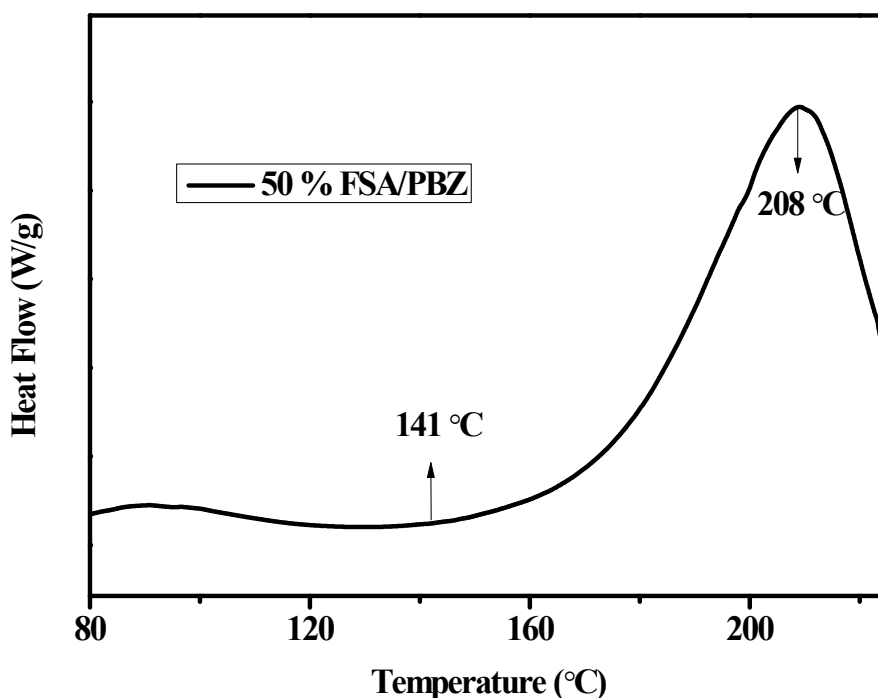


Figure S1 Curing Behavior of 50 % FSA/PBZ

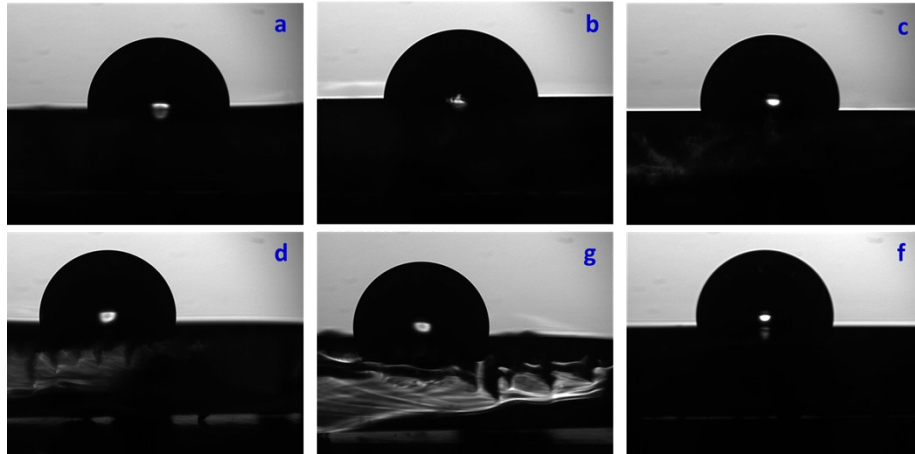


Figure S2 Water Contact Angle of a) PBZ, b) 10 % c) 20 % d) 30 % e) 40 % and f) 50 % FSA reinforced PBZ nanocomposites