

Supporting Information

Nitrogen-doped carbon nanotubes supported double-shelled hollow composite for asymmetric supercapacitor

Yayun Zheng^a, Jie Xu^{a*}, Yan Zhang^b, Xiaoshan Yang^a, Yingjiu Zhang^{a*}, Yuanyuan Shang^a

^a School of Physical Engineering and Key Laboratory of Material Physics, Ministry of Education, Zhengzhou University, NO. 75, Daxue Road, Zhengzhou 450052, China

^b Collage of Physics and Telecommunication Engineering, Zhoukou Normal University, Zhoukou 466001, China

* Corresponding author: Tel. +86 371 67766870, Fax. +86 371 67766629

E-mail address: xujie@zzu.edu.cn; zhangyj2006@zzu.edu.cn

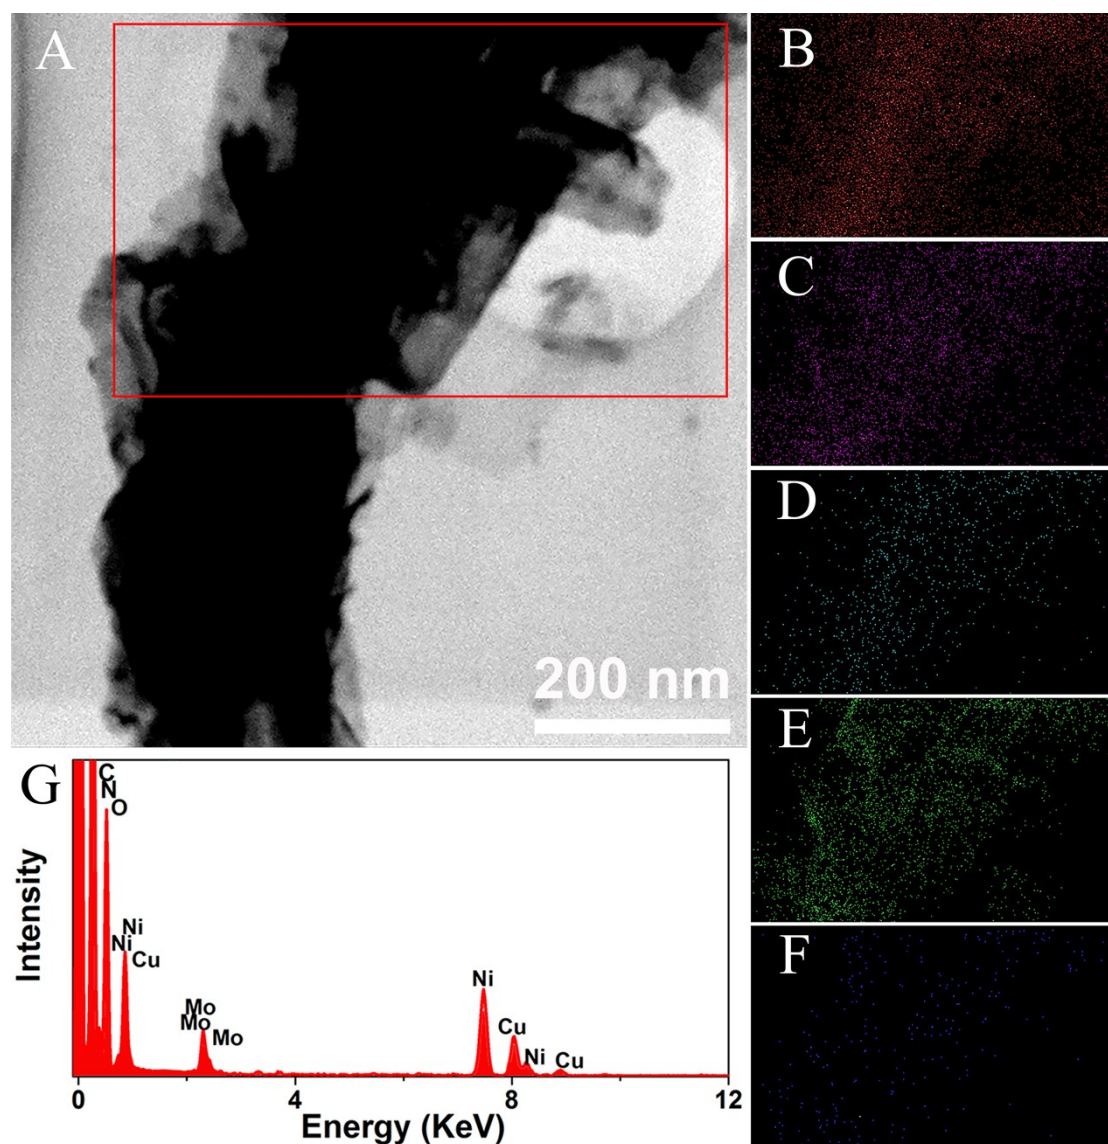


Fig. S1 STEM image of double-shelled hollow N-C@NiMoO₄ composite (A), the EDS mapping results revealing the spatial distribution of the C (B), O (C), N (D), Ni (E), Mo (F), and EDS spectrum of N-C@NiMoO₄ composite (G).

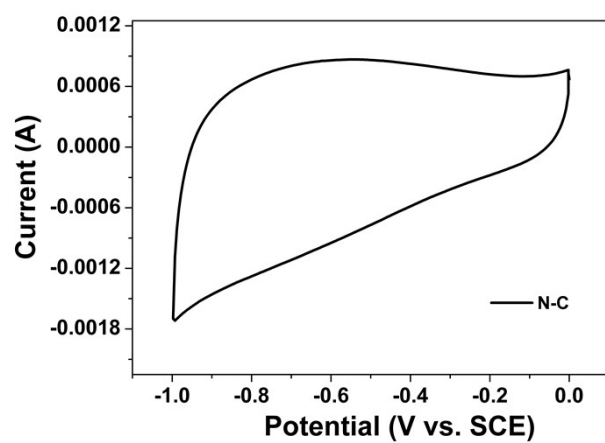


Fig. S2 CV curve of N-C NTs electrodes at a scan rate of 10 mV s⁻¹ in the three-electrode system.