

Supporting Information

Enhancing Performance of Inverted Planar Perovskite Solar Cells by Argon Plasma Post-Treatment on PEDOT:PSS

*Miao Yu^{a, #}, Xiaona Huang^{a, #}, Shuying Wang^{b, #}, Ben Chen^a, Yang Zhang^a, Bo Chen^{c, *}, Mingzhen Liu^{a, *}, Wanli Zhang^a, Jie Xiong^{a, *}*

^a State Key Laboratory of Electronic Thin Films and Integrated Devices, University of Electronic Science and Technology of China, Chengdu 610054, China

^b Chengdu NO.7 High School (Gaoxin Campus), Chengdu 610041, China

^c Institute of Microelectronics of Chinese Academy of Sciences, Beijing 100029, China

[#] These authors contribute equally to this work.

^{*} Corresponding author. Tel.: +86 2883201231; Fax: +86 2883201232; E-mail addresses: b_chen@139.com; mingzhen.liu@uestc.edu.cn; Jiexiong@uestc.edu.cn

Figures:

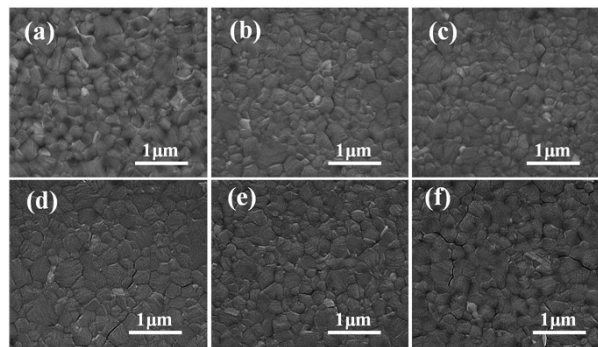


Fig.S1 SEM images of $\text{CH}_3\text{NH}_3\text{PbI}_3$ perovskite films on PEDOT:PSS treated for different time:(a) untreated, (b) 1 min,(c) 2 min, (d) 3 min, (e) 4 min, (f) 5 min

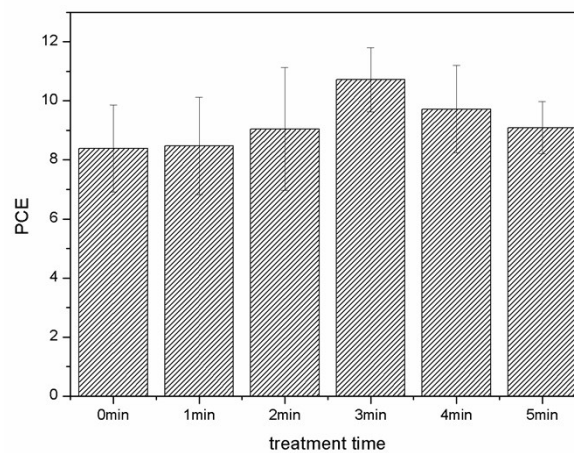


Fig.S2 Histograms of devices efficiency on PEDOT:PSS treated for different time