

Continuous fabrication of multi-stimuli responsive graphene oxide composite hydrogel fibres by microfluidics

Li Peng,^a Yan Liu,^{a,b} Jinghua Gong,^a Kaihuan Zhang^{*b} and Jinghong Ma^{*a}

^a State Key Laboratory for Modification of Chemical Fibers and Polymer Materials, College of Material Science and Engineering, Donghua University, C472, 201620, Shanghai, China.

^b Materials Science and Technology of Polymers, MESA⁺ institute of Nanotechnology, University of Twente, P.O. Box217, 7500 AE Enschede, The Netherlands.

* Corresponding author. E-mail: k.zhang-1@utwente.nl and mjh68@dhu.edu.cn

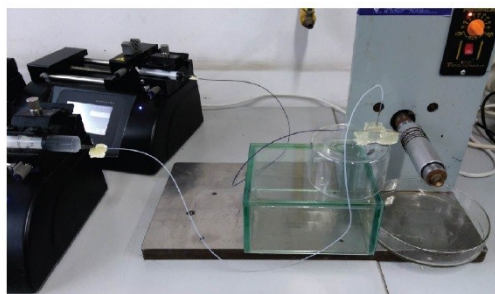


Figure S1. Photograph showing the hydrogel fibre formed via a microfluidic spinning process.

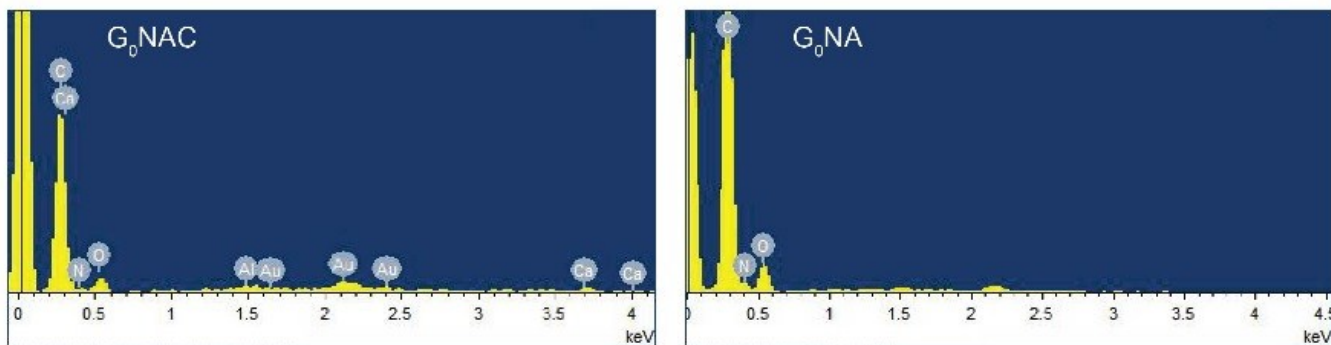


Figure S2. EDS spectra of the G₀NAC and G₀NA hydrogel fibres.

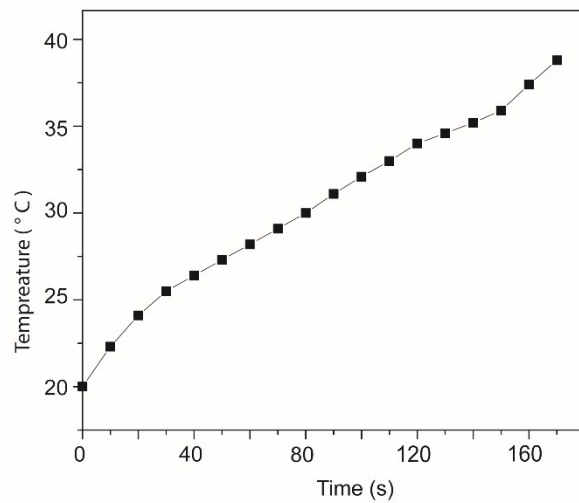


Figure S3. Temperature of the electrolyte solution at different time under a dc voltage of 20 V.