

Structural and ferroelectric properties of perovskite $Pb_{(1-x)}(K_{0.5}Sm_{0.5})_xTiO_3$ ceramics

Arun Kumar Yadav¹, Anita¹, Sunil Kumar¹, Anjali panchwane³, V. Raghavendra Reddy³, Parasharam M. Shirage^{1,2}, Sajal Biring⁴, Somaditya Sen^{1,2}

¹Discipline of Metallurgy Engineering and Materials Science, Indian Institute of Technology, Khandwa Road, Indore-453552, India

²Discipline of Physics, Indian Institute of Technology, Khandwa Road, Indore-453552, India

³UGC-DAE Consortium for Scientific Research, University Campus, Khandwa Road, Indore-452001, India

⁴Electronic Engg., Ming Chi University of Technology, New Taipei City, Taiwan

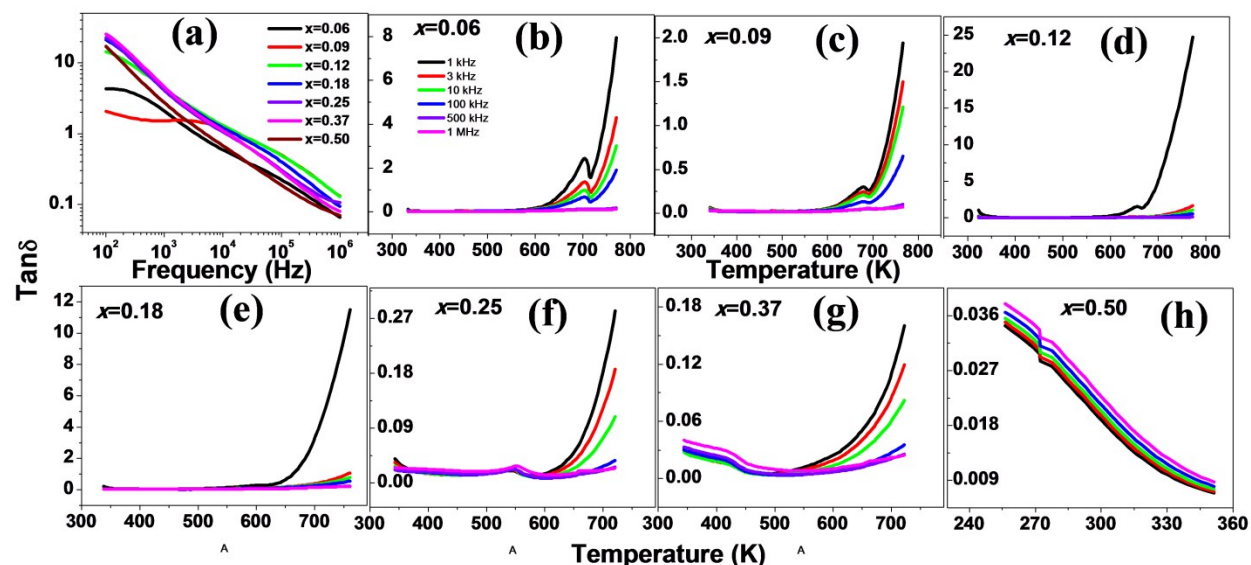


Figure S1: (a) Variation of room temperature $\tan\delta$ as a function of frequency for different compositions. (b)-(h) show the variation of $\tan\delta$ at various frequencies (1 kHz - 1 MHz) with temperature for different compositions $x=0.06 - 0.50$.