

Copper light-catching electrodes for organic photovoltaics

H. Jessica Pereira¹, Oliver S. Hutter^{1,2}, G Dinesha M R Dabera¹, Luke Rochford^{1,3} and Ross. A. Hatton^{1*}

Supplementary Information

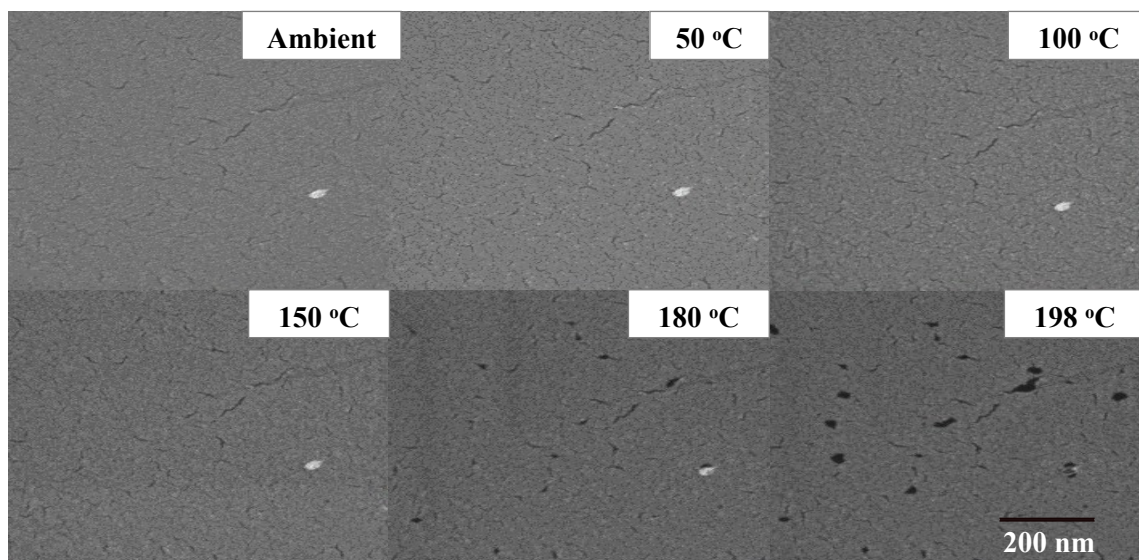


Figure S1: SEM images of 11 nm thick Cu film on PET upon annealing from 50 °C to 198 °C using an SEM with a built-in heating stage.

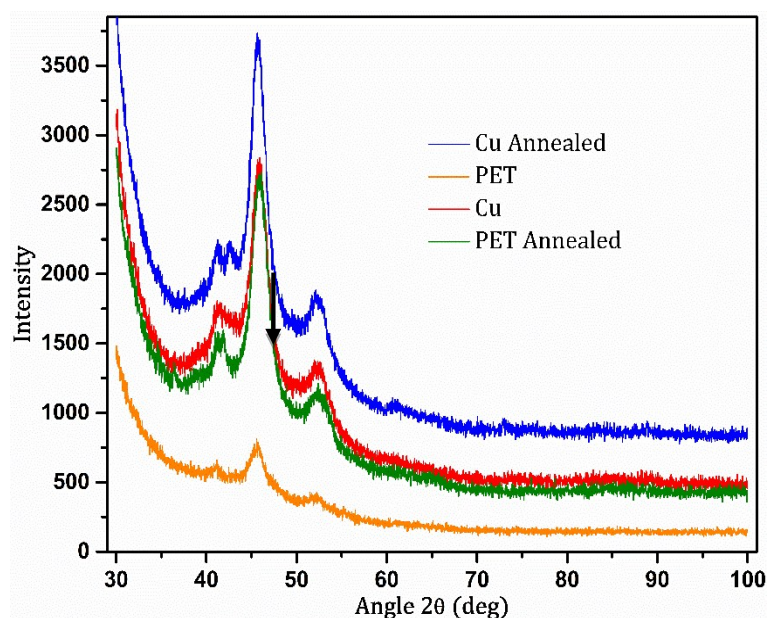


Figure S2: XRD pattern of Cu films (11 nm) deposited on PET substrates before and after annealing at 175°C for 10 min in vacuum. The pattern corresponding to the annealed Cu film has been offset for clarity.

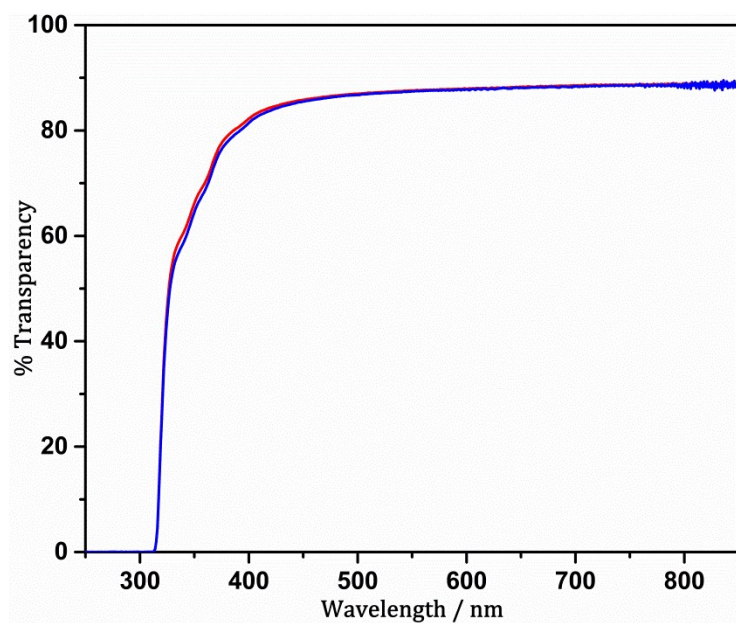


Figure S3: Far-field optical transparency of PET substrates before (red) and after (blue) annealing at 175°C for 10 min in high vacuum.