

**Graphene-Hollow-Cubes with Network-Faces Assembled 3D Micro-Structured
Transparent and Free-Standing Film for high performance Supercapacitor**

Na Li^{*,†}, Xuankai Huang[†], Haiyan Zhang[†], Zhicong Shi[†], Chengxin Wang^{*,‡}

[†] *School of Material and Energy, Guangdong University of Technology, Guangzhou, 510006, P. R. China*

[‡] *State key laboratory of optoelectronic materials and technologies, School of Material Science and Engineering, Sun Yat-sen (Zhongshan) University, Guangzhou 510275, People's Republic of China*

* Correspondence and requests for materials should be addressed to N.L. e-mail: lina150907@gdut.edu.cn and C.X.W. e-mail: wchengx@mail.sysu.edu.cn

Calculation method

(1) Specific capacitances derived from galvanostatic charge/discharge tests are calculated

from: $C_{specific} = \frac{I}{M\bar{v}}$

Where $C_{specific}$ is specific capacitance for a device in F/g, F/cm² or F/cm³, I is the discharge current in A, and \bar{v} is the slope of the discharge curve after the IR drop.

(2) The electrochemical performance shown in the Ragone plot was measured under the same dynamic condition from the C-V datas. The specific energy density (E) and power density (P) of the device were obtained from the following formula:

$$E = \frac{1}{2} \times C_{specific} \times \frac{(\Delta V)^2}{3600} \quad P = \frac{E}{\Delta t} \times 3600$$

Where E is the energy density in Wh Kg⁻¹ or Wh cm⁻³), $C_{specific}$ is the mass or volumetric stack capacitance obtained above and ΔV is the discharge voltage range (in V). P is the energy density in WKg⁻¹ or W cm⁻³, Δt is the discharge time (in S).

(3) Equivalent series resistance (ESR (Ω)) is the internal resistance of the device) was obtained by the following equation: $ESR = \frac{iR_{drop}}{2I}$

Figure S1: High-resolution SEM images observed from the side-view illustrate the stair-step micro-structures.




Figure S2: SEM micrographs of GNHC-GF obtained from the side-view demonstrate the porous network microstructure of the face of the cubes.

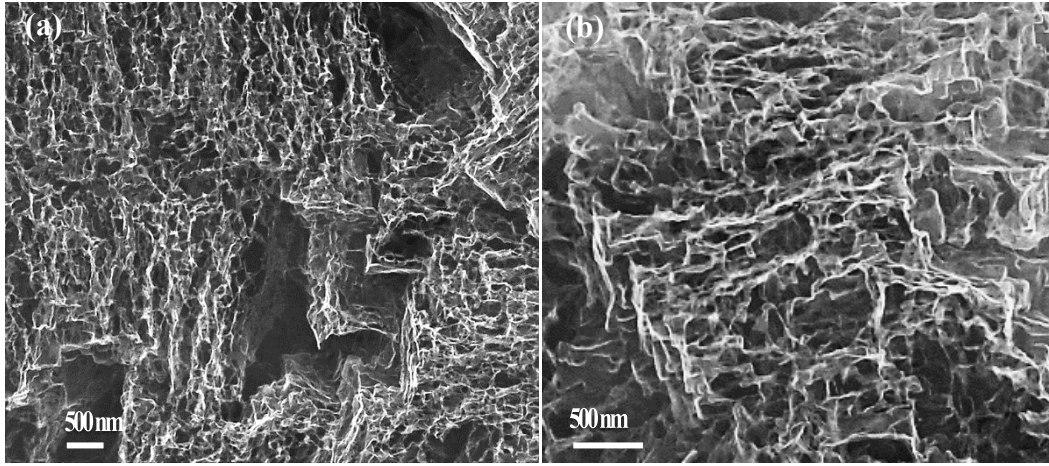


Figure S3: The sectional view of GNHC-GF shows that the film thickness.

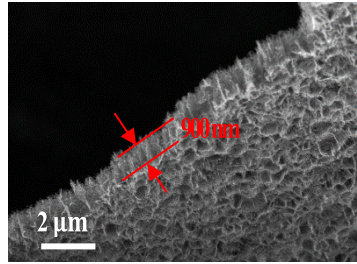


Figure S4: Ragone plot of the device calculated based on GNHC-GF/electrolyte and the total device. The volumetric energies as a function of power density are compared with previously reported flexible transparent supercapacitors.

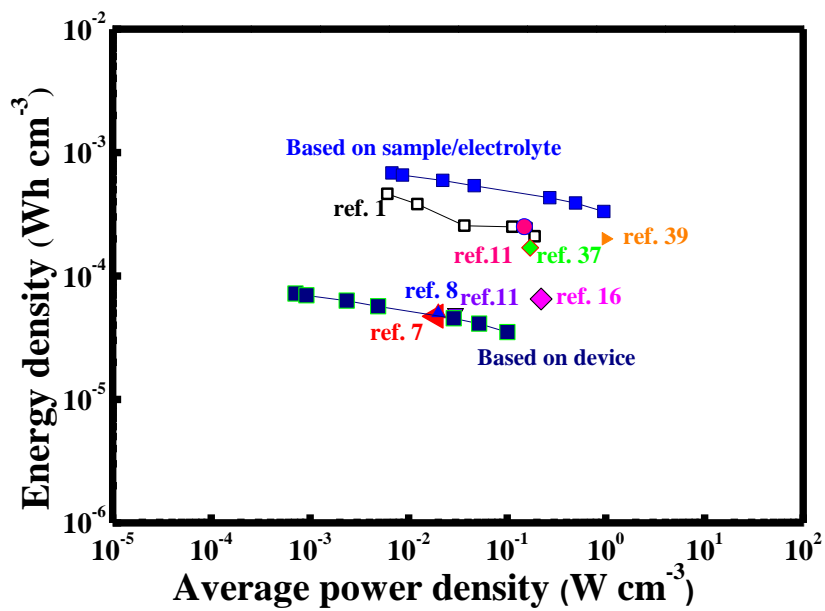


Table S1: Comparison results among transparent/nontransparent supercapacitors.

Material	Transmittance, flexibility	Specific capacitance	Energy density	Power density	Ref.
MWCNT film	<i>Transparent/flexible (62%)</i>	146 μ F/cm ² (based on electrode)	12.5Wh/Kg (based on electrode)	13.9KW/Kg (based on electrode materials)	1
PANI&MWCNT	Transparent/flexible (60%)	300F/g (based on electrode)	—	—	2
MWCNT film	<i>Transparent/flexible (75%)</i>	7.3F/g (for device)	2.4Wh/Kg (based on electrode)	0.9Kw/Kg (based on electrode)	3
PANI&SWCNT	<i>Transparent/flexible (55%)</i>	55F/g (for device)	—	—	4
nano-energed carbon films	<i>Transparent/flexible (71%)</i>	409 μ F/cm ² (for device)	47 μ Wh/cm ³ (for electrolyte/material)	19mW/cm ³ (based on electrolyte /)	5
graphene film	<i>Transparent/flexible (67%)</i>	12.4 μ F/cm ² (for device)	2.94Wh/Kg (based on electrode)	438.6KW/Kg (based on electrode)	6
CVD graphene	<i>Transparent/stretchable (50-60%)</i>	5.8 μ F/cm ² (7.6F/g)	—	—	7
CVD graphene	<i>Transparent/flexible</i>	80.7 μ F/cm ² (for device)	2.5 mWh/cm ³ (for device)	495W/cm ³ (for device)	8
CVD graphene	<i>Transparent/flexible</i>	80 μ F/cm ² (for device)	—	—	9
RGO film	<i>Transparent/flexible</i>	394 μ F/cm ² (for device)s	—	—	9
CVD graphene	<i>Transparent/stretchable</i>	4.27 μ F/cm ² (for device)	0.20 nWh/ cm ²	36.48 μ W/cm ²	10
FFT-GP	<i>Transparent/flexible (electrode79%)</i>	3.3mF/cm ² (for device)	430 μ Wh/cm ³ (for electrolyte/material)	190mW/cm ³ (for electrolyte/materials)	11
RNHC-GF	<i>Transparent/flexible (electrode68%)</i>	5.48 mF/cm² (for device)	657.2μWh/cm³(for electrolyte/material)	954.3mW/cm³(for electrolyte/materials)	Here
SFT-GF	<i>Transparent/flexible (device 51.6%)</i>	4.21 mF/cm ² (for device)	552.3 μ Wh/cm ³	561.9 mW/cm ³	12
onion-likecarbon	<i>Nontransparent/flexible</i>	1.7mF/cm ² (for device)	10 mWh/cm ³ (for device)	1Kw/cm ³ (for device)	13
Fe ₂ O ₃ //MnO ₂	<i>Nontransparent/flexible</i>	1.5F/cm ³	0.55 mWh/cm ³ (for device)	150 mW/cm ³ (for device)	14
NPG-PPy//NPG-PPy	<i>Nontransparent/flexible</i>	30 F/cm ³	2.8 mWh/cm ³ (for device)	56.7 W/cm ³ (for device)	15
MnO ₂ //carbon fiber	<i>Nontransparent/flexible</i>	10 F/cm ³	5 mWh/cm ³ (for device)	929 mW/cm ³	16
WO ₃ @MoO ₃ /PANI	<i>Nontransparent/flexible</i>	216mF/cm ²	1.9 mWh/cm ³ (for device)	730 mW/cm ³	17

Reference:

- (1) Niu, Z. Q.; Zhou, W. Y.; Chen, J.; Feng, G. X.; Li, H.; Hu, Y. S.; Ma, W. J.; Dong, H. B.; Li, J. Z.; Xie, S. S. A Repeated Halving Approach to Fabricate Ultrathin Single-Walled Carbon Nanotube Films for Transparent Supercapacitors. *Small* 2013, 9, 518-524.
- (2) Lin, H. J.; Li, L.; Ren, J.; Cai, Z. B.; Qiu, L. B.; Yang, Z. B.; Peng, H. S. Conducting Polymer Composite Film Incorporated with Aligned Carbon Nanotubes for Transparent, Flexible and Efficient Supercapacitor. *Sci Rep-Uk* 2013, 3.
- (3) Chen, T.; Peng, H. S.; Durstock, M.; Dai, L. M. High-Performance Transparent and Stretchable All-Solid Supercapacitors Based on Highly Aligned Carbon Nanotube Sheets. *Sci Rep-Uk* 2014, 4.
- (4) Choi, B. G.; Chang, S. J.; Kang, H. W.; Park, C. P.; Kim, H. J.; Hong, W. H.; Lee, S.; Huh, Y. S. High Performance of a Solid-State Flexible Asymmetric Supercapacitor Based on Graphene Films. *Nanoscale* 2012, 4, 4983-4988.
- (5) Jung, H. Y.; Karimi, M. B.; Hahm, M. G.; Ajayan, P. M.; Jung, Y. J. Transparent, Flexible Supercapacitors From Nano-Engineered Carbon Films. *Sci Rep-Uk* 2012, 2.
- (6) Gao, Y.; Zhou, Y. S.; Xiong, W.; Jiang, L. J.; Mahjouri-samani, M.; Thirugnanam, P.; Huang, X.; Wang, M. M.; Jiang, L.; Lu, Y. F. Transparent, Flexible, and Solid-State Supercapacitors Based on Graphene Electrodes. *Apl. Mater.* 2013, 1.
- (7) Chen, T.; Xue, Y. H.; Roy, A. K.; Dai, L. M. Transparent and Stretchable High-Performance Supercapacitors Based on Wrinkled Graphene Electrodes. *Acs Nano* 2014, 8, 1039-1046.
- (8) Wu, Z. S.; Parvez, K.; Feng, X. L.; Mullen, K. Graphene-Based In-Plane Micro-Supercapacitors with High Power and Energy Densities. *Nat. Commun.* 2013, 4.
- (9) Yoo, J. J.; Balakrishnan, K.; Huang, J. S.; Meunier, V.; Sumpter, B. G.; Srivastava, A.; Conway, M.; Reddy, A. L. M.; Yu, J.; Vajtai, R.; Ajayan, P. M. Ultrathin Planar Graphene Supercapacitors. *Nano Lett.* 2011, 11, 1423-1427.
- (10) Xu, P.; Kang, J.; Choi, J. B.; Suhr, J.; Yu, J. Y.; Li, F. X.; Byun, J. H.; Kim, B. S.; Chou, T. W. Laminated Ultrathin Chemical Vapor Deposition Graphene Films Based

Stretchable and Transparent High-Rate Supercapacitor. *ACS Nano* 2014, 8, 9437-9445.

(11) Li, N.; Yang, G. Z.; Sun, Y.; Song, H. W.; Cui, H.; Yang, G. W.; Wang, C. X. Free-Standing and Transparent Graphene Membrane of Polyhedron Box-Shaped Basic Building Units Directly Grown Using a NaCl Template for Flexible Transparent and Stretchable Solid-State Supercapacitors. *Nano Lett.* 2015, 15, 3195-3203.

(12) Na Li, Xuankai Huang, Haiyan Zhang, Yunyong Li, and Chengxin Wang, Transparent and Self-Supporting Graphene Films with Wrinkled-Graphene-Wall-Assembled Opening Polyhedron Building Blocks for High Performance Flexible/Transparent Supercapacitors. *ACS Appl. Mater. Inter.*

(13) Pech, D.; Brunet, M.; Durou, H.; Huang, P. H.; Mochalin, V.; Gogotsi, Y.; Taberna, P. L.; Simon, P. Ultrahigh-Power Micrometre-Sized Supercapacitors Based on Onion-Like Carbon. *Nat. Nanotechnol.* 2010, 5, 651-654.

(14) Yang, P. H.; Ding, Y.; Lin, Z. Y.; Chen, Z. W.; Li, Y. Z.; Qiang, P. F.; Ebrahimi, M.; Mai, W. J.; Wong, C. P.; Wang, Z. L. Low-Cost High-Performance Solid-State Asymmetric Supercapacitors Based on MnO₂ Nanowires and Fe₂O₃ Nanotubes. *Nano Lett.* 2014, 14, 731-736.

(15) Meng, F. H.; Ding, Y. Sub-Micrometer-Thick All-Solid-State Supercapacitors with High Power and Energy Densities. *Adv. Mater.* 2011, 23, 4098-4015.

(16) Yu, D. S.; Goh, K. L.; Zhang, Q.; Wei, L.; Wang, H.; Jiang, W. C.; Chen, Y. Controlled Functionalization of Carbonaceous Fibers for Asymmetric Solid-State Micro-Supercapacitors with High Volumetric Energy Density. *Adv. Mater.* 2014, 26, 6790-6797.

(17) Xiao, X.; Ding, T. P.; Yuan, L. Y.; Shen, Y. Q.; Zhong, Q.; Zhang, X. H.; Cao, Y. Z.; Hu, B.; Zhai, T.; Gong, L.; Chen, J.; Tong, Y. X.; Zhou, J.; Wang, Z. L. WO_{3-x}/MoO_{3-x} Core/Shell Nanowires on Carbon Fabric as an Anode for All-Solid-State Asymmetric Supercapacitors. *Adv. Energy Mater.* 2012, 2, 1328-1332.