

Electronic Supplementary Information (ESI) for

**Heating induced negative temperature coefficient effect in
conductive graphene/polymer ternary nanocomposites with a
segregated and double-percolated structure**

Shuaiguo Zhao,¹ Dandan Lou,¹ Pengfei Zhan,¹ Guojie Li,¹ Kun Dai,^{1,2,*} Jiang Guo,³
Guoqiang Zheng,¹ Chuntai Liu,¹ Changyu Shen,¹ and Zhanhu Guo^{3,*}

¹ School of Materials Science and Engineering,
The Key Laboratory of Material Processing and Mold of Ministry of Education,
Zhengzhou University, Zhengzhou, Henan 450001, P.R. China

² State Key Laboratory of Polymer Materials Engineering,
Sichuan University, Chengdu, Sichuan 610065, PR China

³ Integrated Composites Laboratory (ICL),
Department of Chemical & Biomolecular Engineering,
University of Tennessee, Knoxville, TN 37996 USA

**: Correspondence authors*

Tel.: +86-371-63887969;

E-mail addresses: kundai@zzu.edu.cn (K. D.),

zguo10@utk.edu (Z. G.)

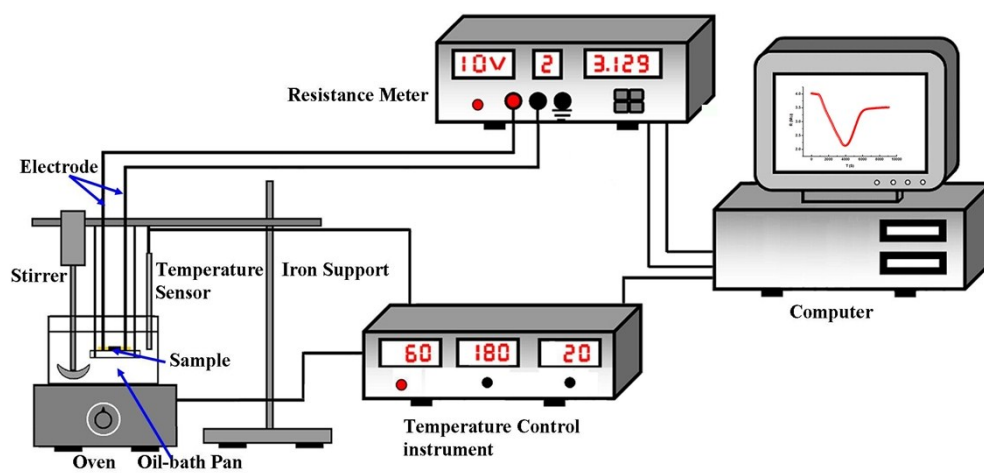


Fig. S1. The schematic figure of the equipment for temperature-resistivity test.