

Supplementary Information

Control of oxygen vacancies in ZnO nanorods by annealing and their influence on ZnO/PEDOT:PSS diode behaviour

Ying Tu^a, Shuqun Chen^b, Xuan Li^a, Jelena Gorbaciova^c, William P. Gillin^c, Steffi Krause^a, and Joe Briscoe^{a*}

- a. Materials Research Institute and School of Engineering and Materials Science, Queen Mary University of London, Mile End Road, London, E1 4NS, UK. E-mail:j.briscoe@qmul.ac.uk
- b. Key Laboratory of Advanced Functional Materials, School of Materials and Engineering, Beijing University of Technology, Beijing, 100124, China
- c. Materials Research Institute and School of Physics and Astronomy, Queen Mary University of London, Mile End Road, London, E1 4NS, UK

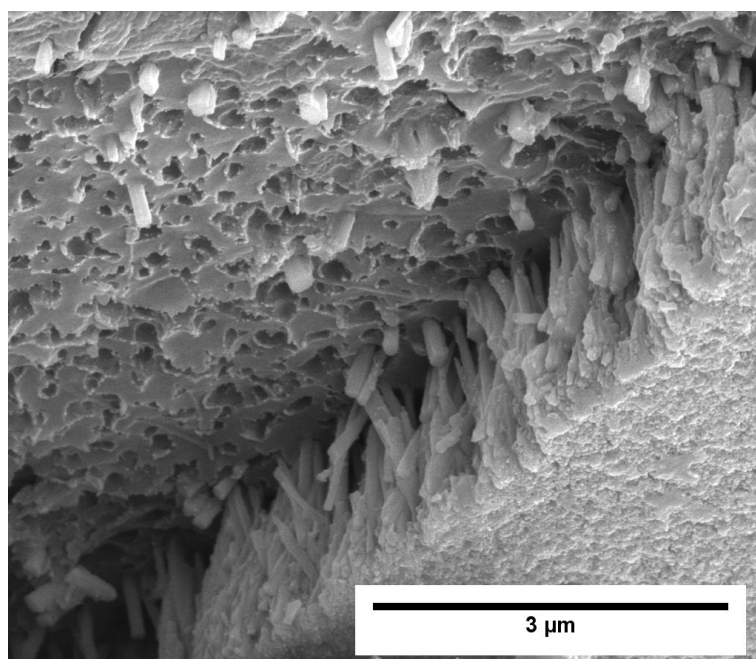


Figure S1 SEM image of the ZnO/PEDOT:PSS interface with ZnO partially removed. The holes in the PEDOT:PSS layer originated from the tips of the ZnO nanorods which penetrated inside the layer.