

A novel mechanism for user-friendly and self-activated microdroplet generation capable of programmable control

Yangyang Jiang,^{a1} Lin Du,^{b1} Quanquan Mu,^a Yuanming Li,^a Zhongxu Cui,^a Jia Zhou,^b and Wenming Wu^{*a,b}

^a State Key Laboratory of Applied Optics, Changchun Institute of Optics, Fine Mechanics and Physics, Chinese Academy of Sciences, Changchun, 130033, China.

^b State Key Laboratory of ASIC and Systems, Fudan University, Shanghai 200433, China.

*Corresponding author: wuwm@ciomp.ac.cn

Electronic Supplementary material (ESI 1)

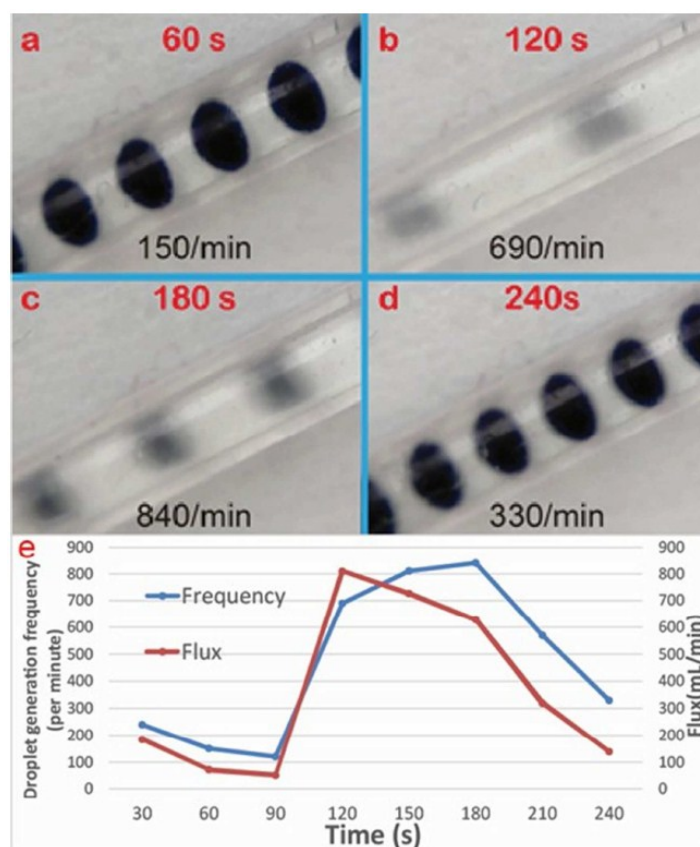


Fig. S1 (a) ~ (d) Series of photos comparing the droplet generation inside Teflon tube at 60, 120, 180, 240 s. (e) The control of droplet generation frequency and self-powered flux by end-blunted valve.