

Electronic Supplementary Information

A continuous-flow acoustofluidic cytometer for single-cell mechanotyping

Han Wang,^a Zhongzheng Liu,^b Dong M. Shin,^c Zhuo G. Chen,^c Younghak Cho,^d Yong-Joe Kim,^b and A. Han^{*e,f,g}

^a Department of Biomedical Engineering, School of Medicine, Tsinghua University, Beijing, 100084, China.

^b Department of Mechanical Engineering, Texas A&M University, College Station, TX, 77843, USA.

^c Department of Hematology and Medical Oncology, Emory University School of Medicine, Atlanta, GA, USA.

^d Department of Mechanical System Design Engineering, Seoul National University of Science and Technology, Seoul, Republic of Korea.

^e Department of Electrical and Computer Engineering, Texas A&M University, College Station, TX, 77843, USA.

^f Department of Biomedical Engineering, Texas A&M University, College Station, TX, 77843, USA.

^g Center for Remote Healthcare Technology and Systems (CRHTS), Texas A&M University, College Station, TX, 77843, USA.

*Correspondence should be addressed to Arum Han (arum.han@ece.tamu.edu).

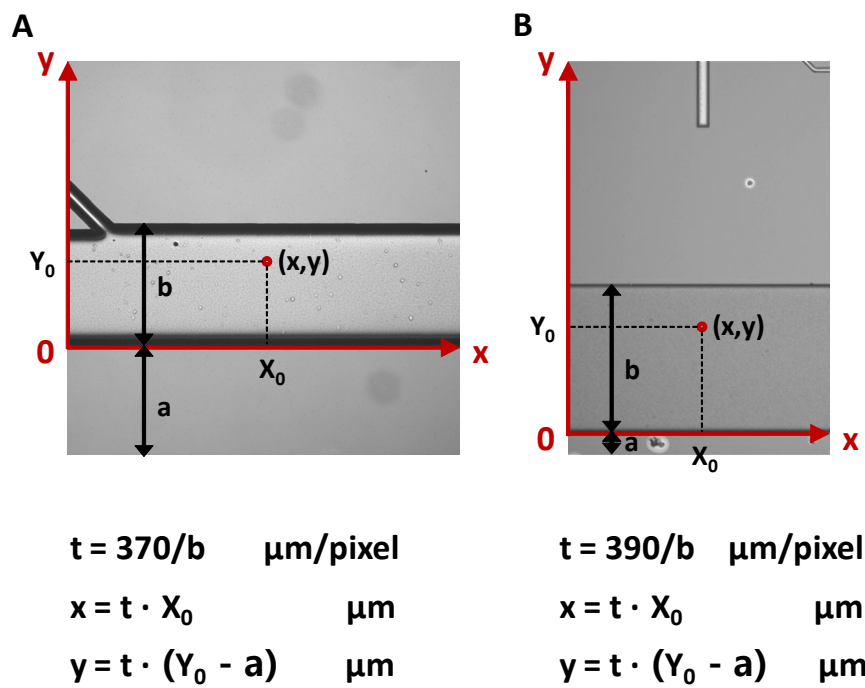


Fig. S1 The coordinate conversion method for processing the raw image data for (A) Set 1 microdevices and (B) Set 2 microdevices.