

Supporting Information

Synchronized-pressing fabrication of cost-efficient crystalline perovskite solar cells via intermediate engineering

Yongchao Ma ^{a, b}, Jihoon Lee ^{a, b}, Yanliang Liu ^{a, b}, Pesi Mwitumwa Hangoma ^a, Woon Ik Park ^{b, c}, Jae-Hong Lim ^{b, d}, Yun Kyung Jung ^e, Jung Hyun Jeong ^a, Sung Heum Park ^{a, b*}, Kwangho Kim ^{b*}

^aDepartment of Physics, Pukyong National University, Busan, 48513, South Korea

^bHybrid Interface Materials Global Frontier Research Group, Pusan National University, Busan 46241, South Korea

^cElectronic Convergence Materials Division, Korea Institute of Ceramic Engineering & Technology (KICET) 101 Soho-ro, Jinju 52851, South Korea

^dElectrochemistry Department, Korea Institute of Materials Science, 797 Changwondaero, Changwon, Gyeongnam, 51508, South Korea

^eSchool of Biomedical Engineering, Inje University, Inje-ro 197, Gimhae, Gyeongnam 50834, South Korea

AUTHOR INFORMATION

Corresponding Authors

*E-mail: spark@pknu.ac.kr, kwhokim@pusan.ac.kr

Fig. S1.

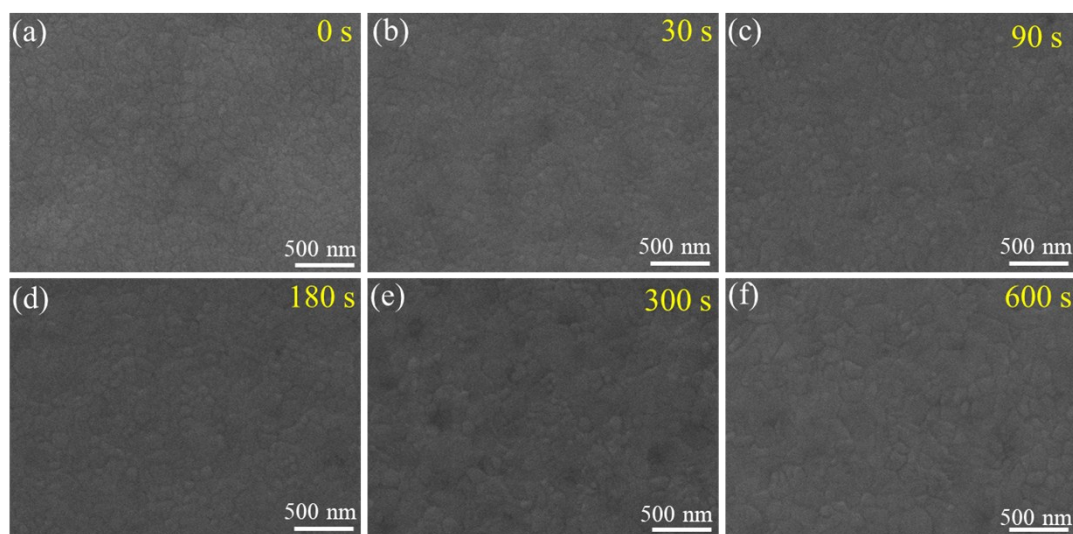


Fig. S1. Time-dependent top-view SEM images of prepared reference films. (a) 0 s, (b) 30 s, (c) 90 s, (d) 180 s, (e) 300 s and (f) 600 s, respectively.

Fig. S2.

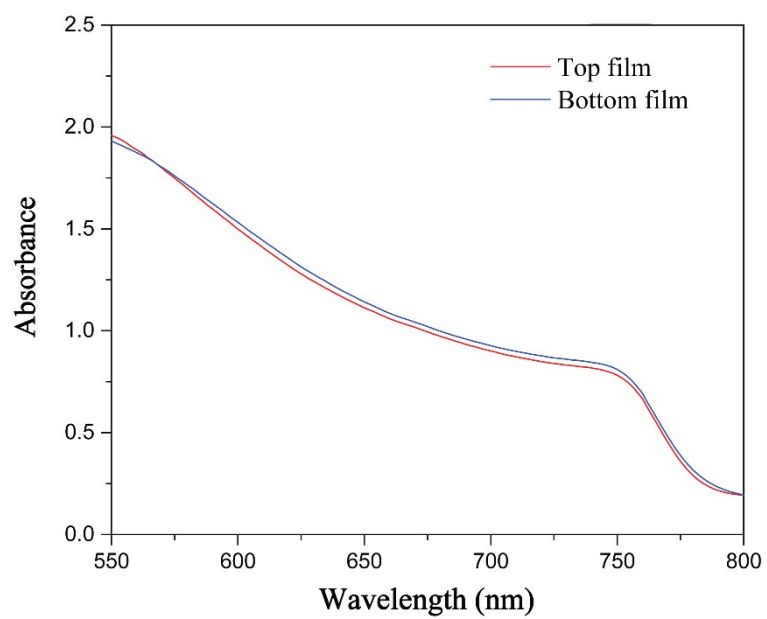


Fig. S2. UV-vis absorption spectra of the top film and bottom film fabricated by SPA method.