

Supporting information

For

High Thermoelectric Power-Factor Composites Based on Flexible Three-Dimensional Graphene and Polyaniline

Yu-Yun Hsieh^{a†}, Yu Zhang^{a†}, Lu Zhang^b, Yanbo Fang^a, Sathya Narayan Kanakaraaj^a, Je-Hyeong Bahk^{a}, Vesselin Shanov^{a,c*}*

^a Department of Mechanical and Materials Engineering, University of Cincinnati, Cincinnati, OH, 45221-0072, USA

^b Sonova USA, Fremont, CA, 94538, USA

^c Department of Chemical and Environmental Engineering, University of Cincinnati, OH, 45221-0012, USA

[†] These authors contribute equally to this work

* Corresponding author: bahkjg@ucmail.uc.edu, shanovvn@ucmail.uc.edu

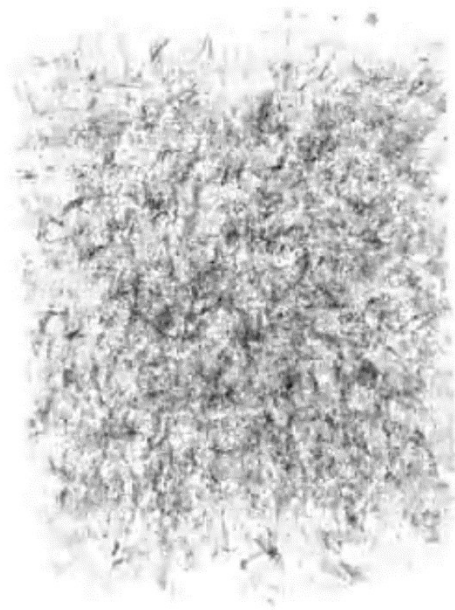


Figure S1. X-ray computed tomography of pristine 3DG showing its highly porous structure (Screen capture image of Movie S1) .

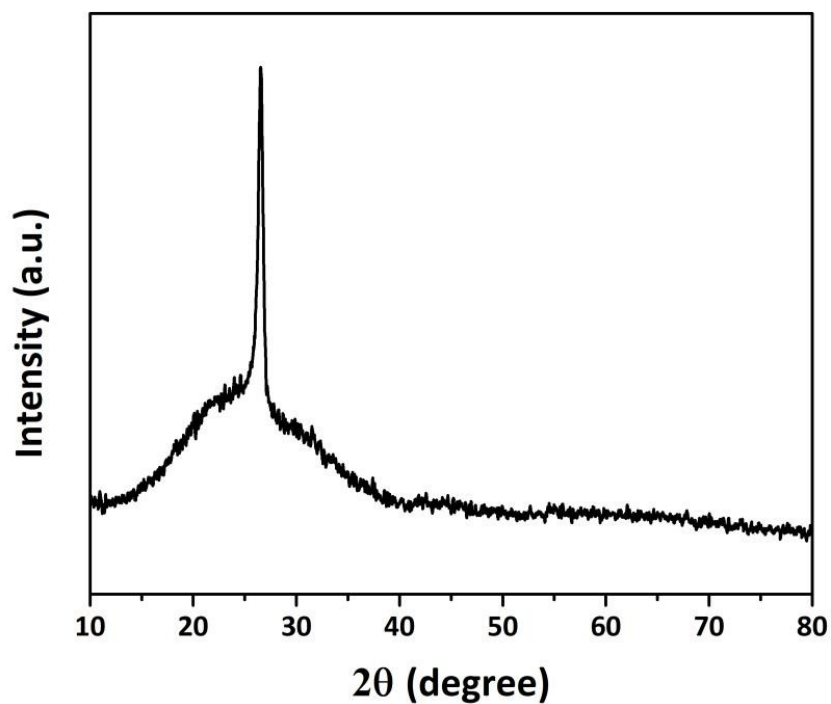


Figure S2. XRD patterns of pristine 3DG, demonstrating absence of nickel catalyst peaks.

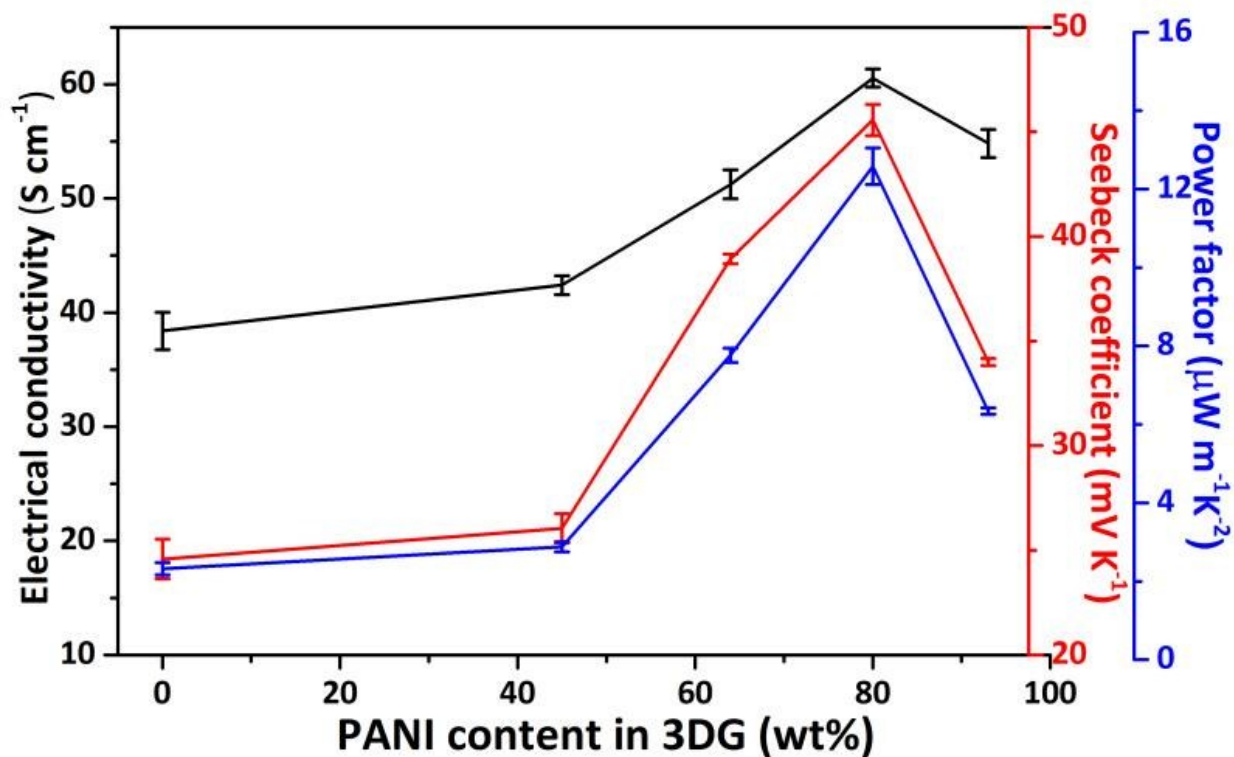


Figure S3. Electrical conductivity, Seebeck coefficient, and power factor of the 3DG-PANI composites before compression, as a function of PANI content.