
Supporting Information for
ZnO photoelectrode simultaneous modified with Cu₂O and Co-Pi
based on broaden light absorption and efficient photogenerated
carriers separation

Chonghao Ma^{1,2}, Zhifeng Liu^{1,2*}, Qijun Cai^{1,2}, Changcun Han^{1,2}, Zhengfu Tong^{1,2}
(1 Hubei Collaborative Innovation Center for High-efficiency Utilization of Solar
Energy, Hubei University of Technology, Wuhan, 430068, China. 2 School of
Science, Hubei University of Technology, Wuhan, 430068, China.)

* corresponding author E-mail: address: tjulzf@163.com

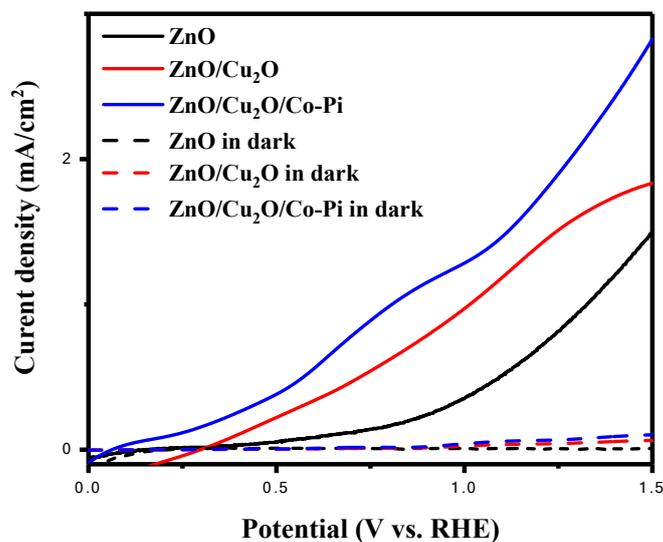


Fig.S1 Current density-voltage (*i*-*v*) curves under simulated sunlight illumination and in dark

* corresponding author E-mail: address: tjulzf@163.com

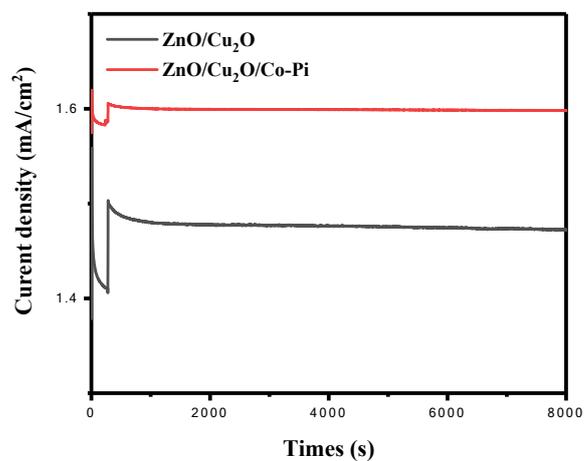


Fig.S2 Photocurrent density–time curves of ZnO/Cu₂O and ZnO/Cu₂O/Co-Pi photoelectrodes measured in 0.5 M Na₂SO₄ electrolyte at 1.23 V vs RHE under simulated sunlight illumination for 10 h