

Supporting Information

Growth dynamics of surface nanodroplets during solvent exchange at varying flow rates

Brendan Dyett,^a Akihito Kiyama,^b Maaïke Rump,^c Yoshiyuki Tagawa^b Detlef Lohse^c and
Xuehua Zhang^{dac}

*^aSoft Matter & Interfaces Group, School of Engineering, RMIT University, Melbourne,
VIC 3001*

*^bDepartment of Mechanical Systems Engineering, Tokyo University of Agriculture and
Technology, Nakacho 2-24-16 Koganei, Tokyo 184-8588, Japan.*

*^cPhysics of Fluids group, Department of Science and Engineering, MESA+ Institute, J. M.
Burgers Centre for Fluid Dynamics and the Max Planck Twente Center for Complex Fluid
Dynamics, University of Twente, P.O. Box 217, 7500 AE Enschede, The Netherlands*

*^dDepartment of Chemical and Materials Engineering, Faculty of Engineering, University of
Alberta, Edmonton, Alberta T6G1H9, Canada*

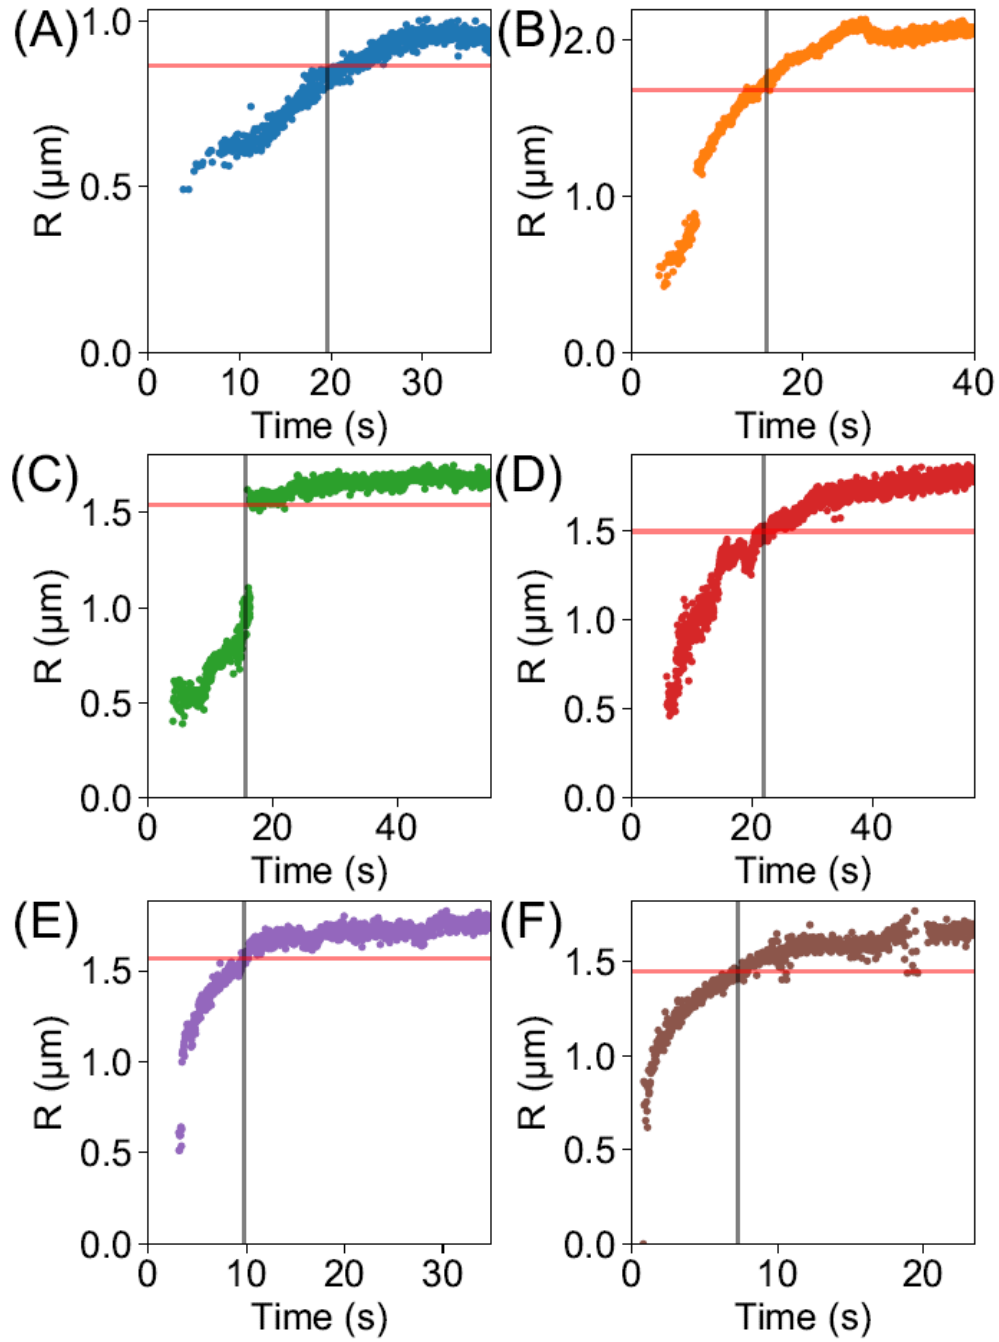


Figure S1. Plot of droplet base radius vs time for representative growing droplets. The flow rates were (A) 25 $\mu\text{l}/\text{min}$ (blue), (B) 35 $\mu\text{l}/\text{min}$ (orange), (C) 50 $\mu\text{l}/\text{min}$ (green), (D) 75 $\mu\text{l}/\text{min}$ (red), (E) 100 $\mu\text{l}/\text{min}$ (purple), (F) 150 $\mu\text{l}/\text{min}$ (brown). $0.9R_{\text{max}}$ and the time taken to reach $0.9R_{\text{max}}$ are shown by the red and black lines, respectively.