

Supplementary Information for

Controlled defects to link wetting properties to surface heterogeneity

Romain Lhermerout^a and Kristina Davitt^{*a}

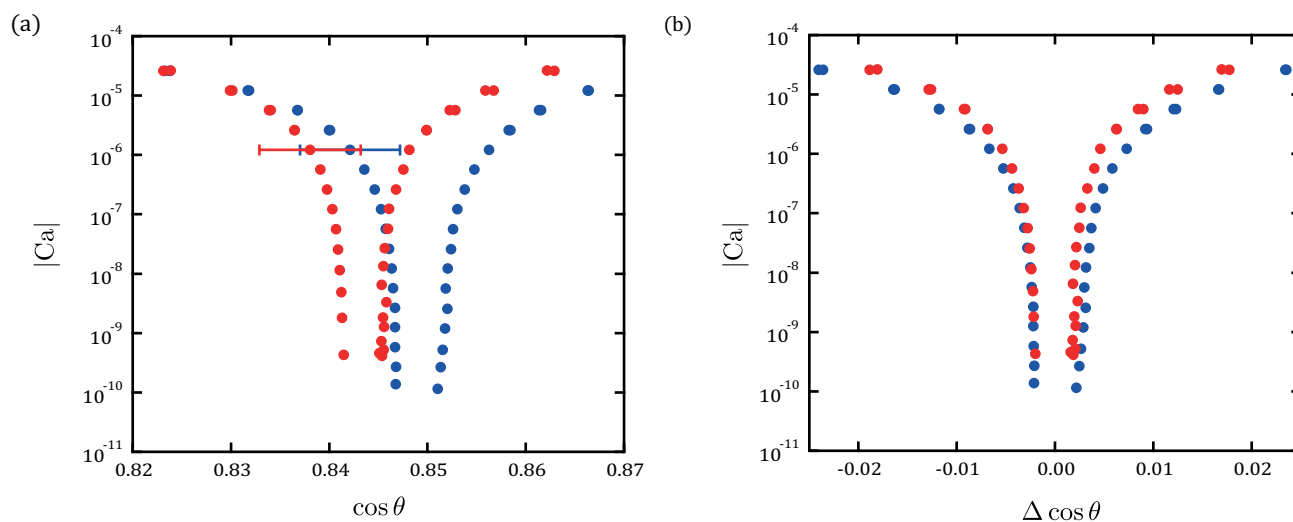


Figure 1: Contact line dynamics measured on the reference surface (red symbols) and on a surface covered with defects (blue symbols) using hexadecane. The defects were sintered at 1170°C and have a concentration of $n = 5.9\mu\text{m}^{-2}$. (a) Error bars shown on the data point taken at $10\mu\text{m s}^{-1}$ correspond to the uncertainty in the absolute angle. (b) Curves shifted to facilitate comparison of the low-velocity slope.

^a Laboratoire de Physique Statistique (LPS), UMR 8550 CNRS, ENS, Univ. Paris Diderot, Sorbonne Université, 24 rue Lhomond, 75005, Paris, France.

* E-mail: kristina.davitt@lps.ens.fr