

PEDOT:PSS Monolayers to Enhance Hole Extraction and Stability of Perovskite Solar Cells

Lijun Hu^a, Meng Li^{a*}, Ke Yang^a, Zhuang Xiong^a, Bo Yang^b, Ming Wang^b, Xiaosheng Tang^b,
Zhigang Zang^b, Xixia Liu^c, Bichen Li^c, Zeyun Xiao^d, Shirong Lu^d, Hao Gong^c, Jianyong Ouyang^c,
Kuan Sun^{a*}

^a Key Laboratory of Low-grade Energy Utilization Technologies and Systems, Ministry of Education, School of Power Engineering, Chongqing University, Chongqing 400044, China

^b Key Laboratory of Optoelectronic Technology & Systems, Ministry of Education, Chongqing 400044, China

^c Department of Materials Science & Engineering, National University of Singapore, Singapore 117574, Singapore

^d Chongqing Institute of Green and Intelligent Technology, CAS, 266 Fang Zheng Road, Chongqing 400714, China

Corresponding Emails: kuan.sun@cqu.edu.cn; limeng@cqu.edu.cn

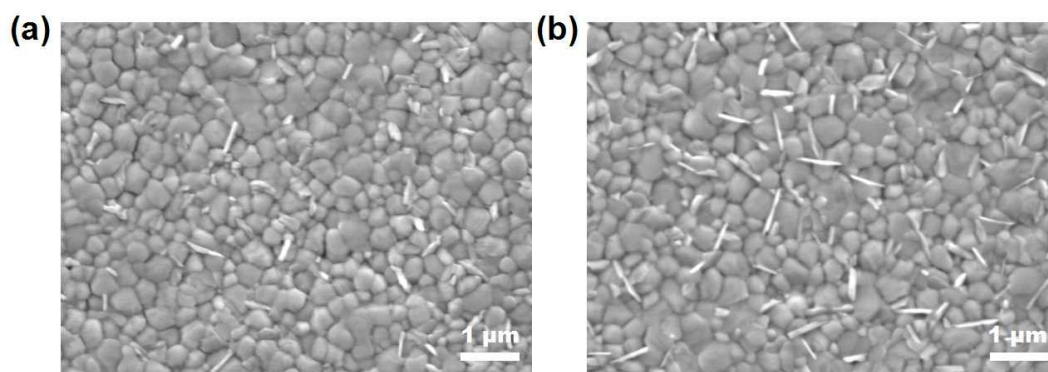


Figure S1. Perovskite films morphology prepared on pristine PEDOT:PSS (a) and (b) water rinsed monolayers PEDOT:PSS.

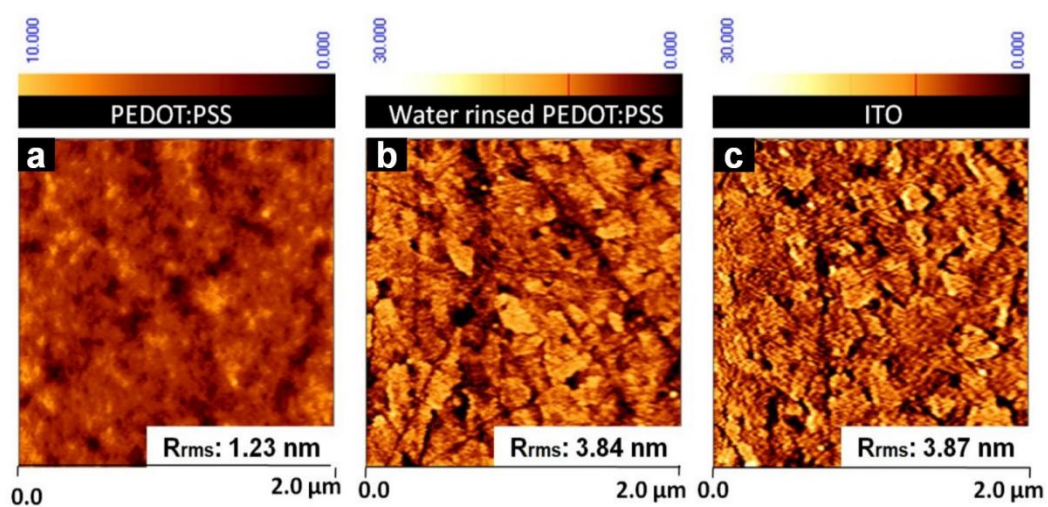


Figure S2. AFM images: (a) pristine PEDOT:PSS, (b) water rinsed PEDOT:PSS and (c) ITO.