

Self-healing, adaptive and conductive polymer composite ink for 3D printing of gas sensors

Tongfei Wu^{a,b}, Euan Gray^a, and Biqiong Chen^{a,c}*

^aDepartment of Materials Science and Engineering, University of Sheffield, Mappin Street, Sheffield, S1 3JD, UK.

^bSchool of Materials Science and Engineering, Sun Yat-sen University, Guangzhou, 510275, China.

^cSchool of Mechanical and Aerospace Engineering, Queen's University Belfast, Stranmillis Road, Belfast BT9 5AH, UK.

Data fitting

$$y = y_0 + A_1 e^{-t/t_1} + A_2 e^{-t/t_2} \quad (1)$$

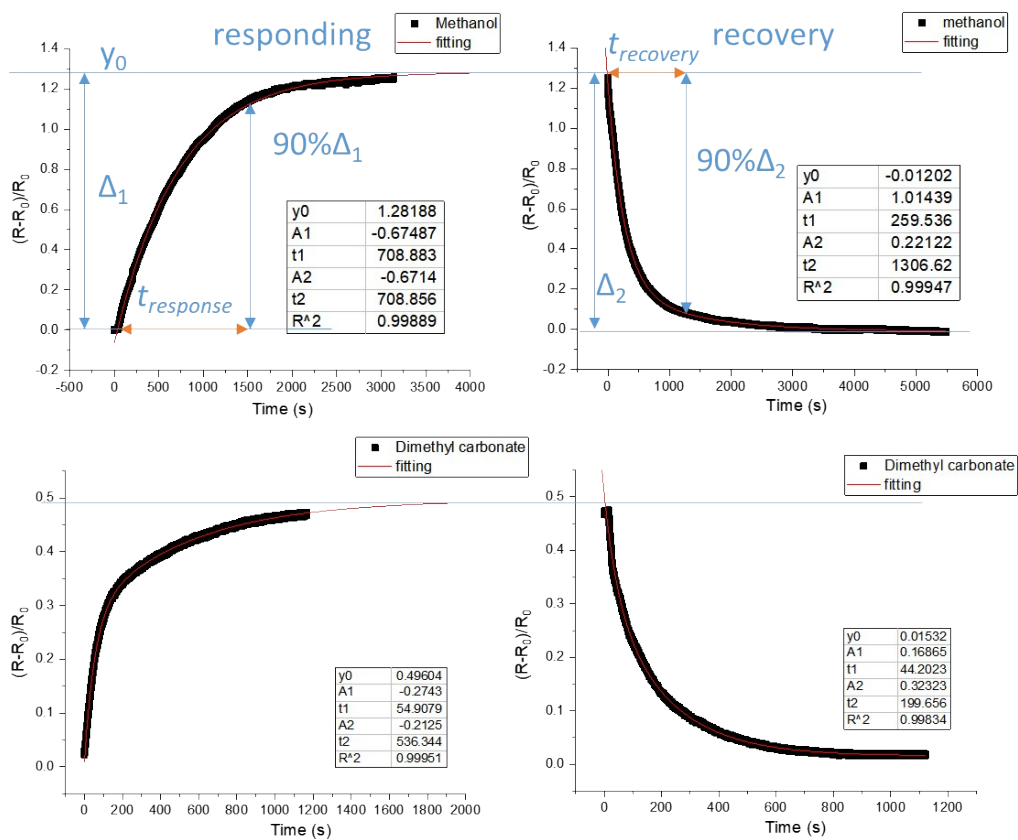


Figure S1. Data fitting results using equation (1). (To be continued)

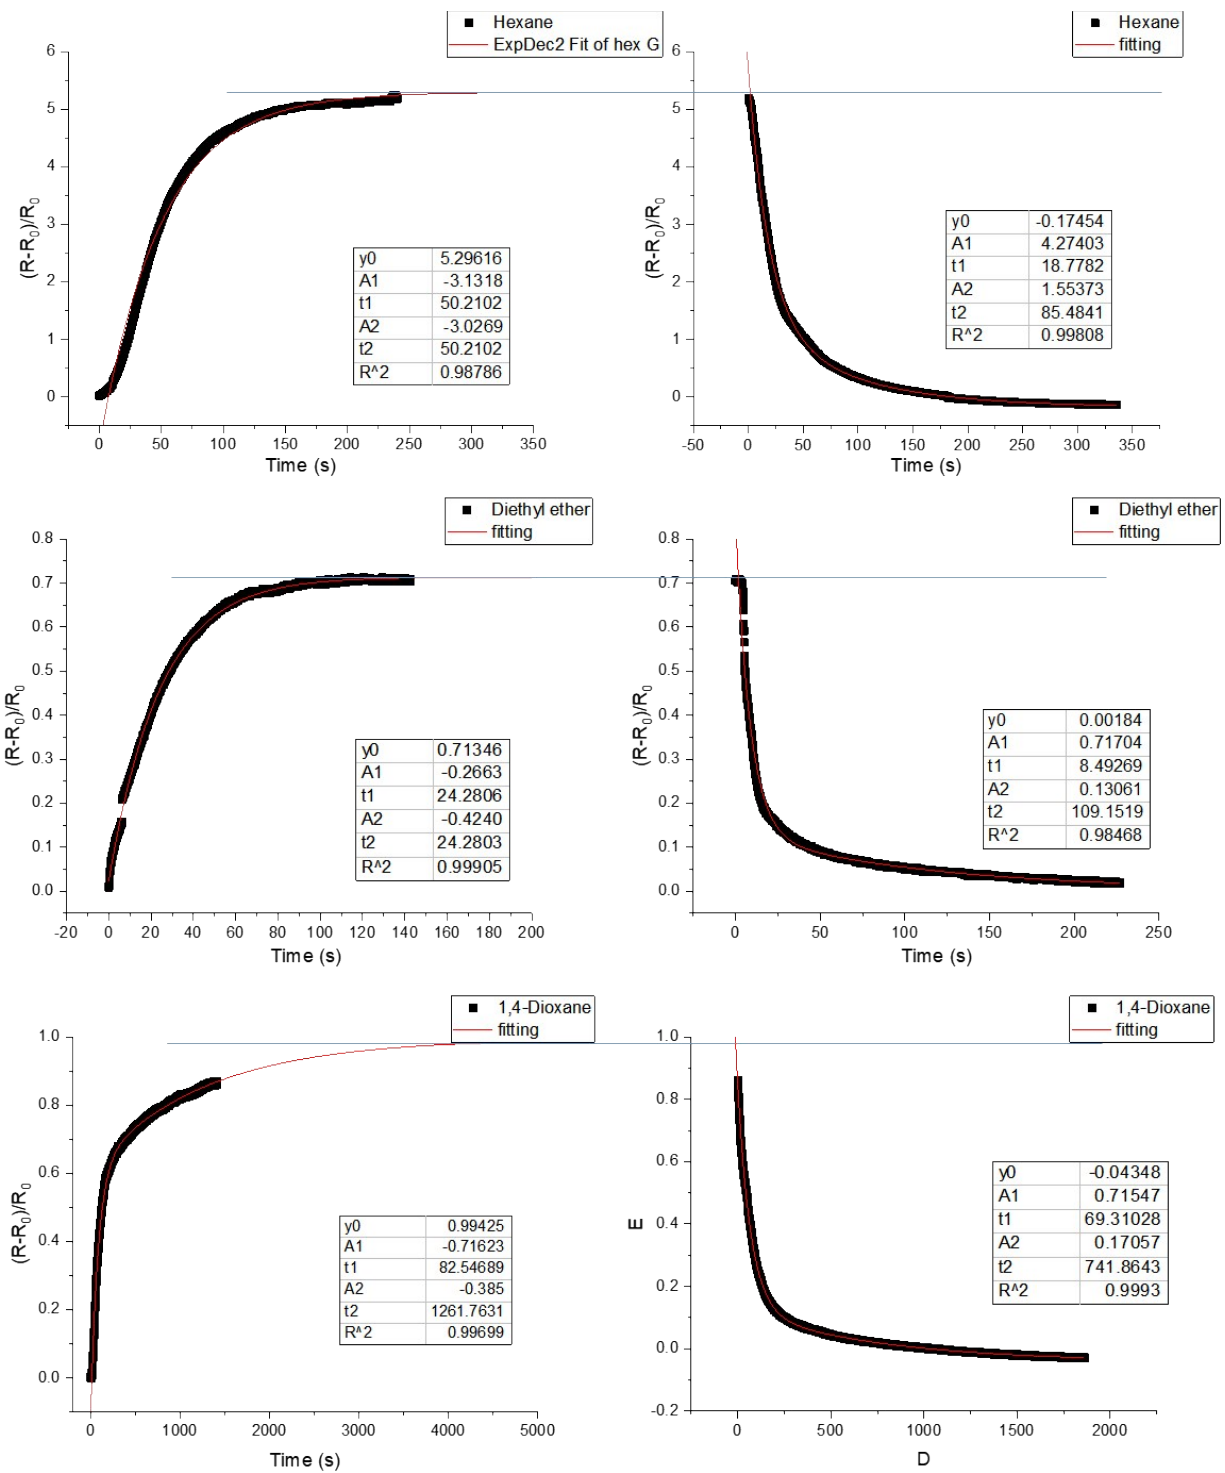


Figure S1. Data fitting results using equation (1). (To be continued)

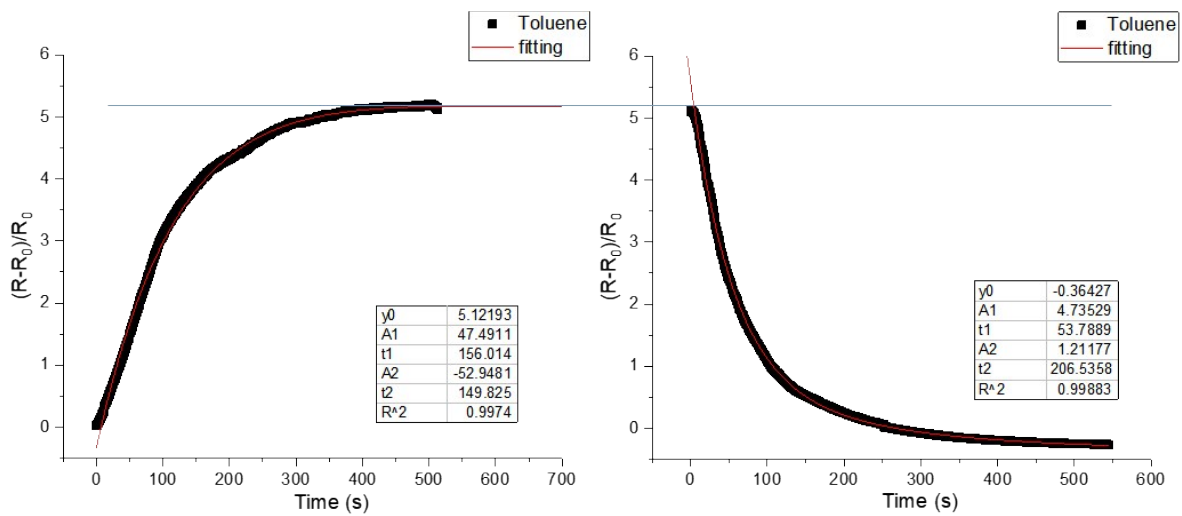


Figure S1. Data fitting results using equation (1).