

Ultralight MXene-based Aerogels with High Electromagnetic Interference Shielding Performance

Renji Bian^a, Gaoling He^a, Weiqiang Zhi^b, Shanglin Xiang^b, Tingwei Wang^b, Dongyu Cai^{a,*}

^aKey Laboratory of Flexible Electronics (KLOFE) & Institute of Advanced Materials (IAM), Jiangsu National Synergetic Innovation Center for Advanced Materials (SICAM), Nanjing Tech University, 30 South PuZhu Road, Nanjing, Jiangsu, 211816, China

^bCollege of Materials Science & Engineering, Nanjing Tech University, No.5 Ximofan Road, Nanjing, 21009, China

*E-mail: iamdycal@njtech.edu.cn

Supporting Figures

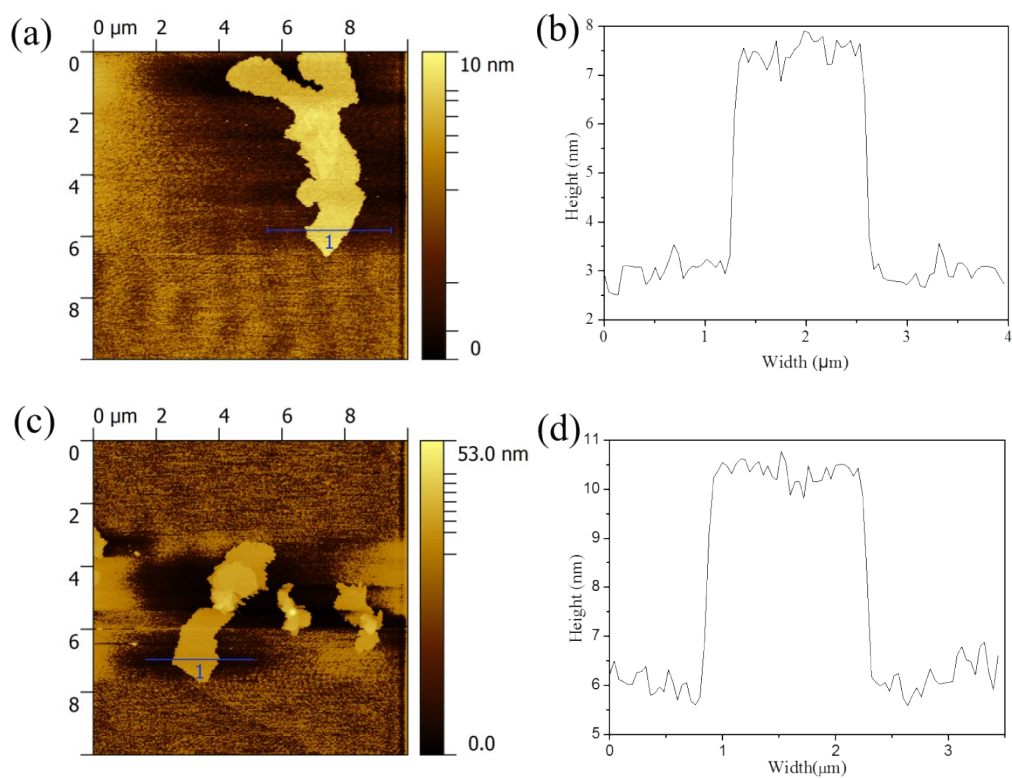


Figure S1. (a) and (c) AFM images of the MXene flakes deposited on silicon wafer; (b) and (d) height profile along the blue line in (a) and (b), respectively.

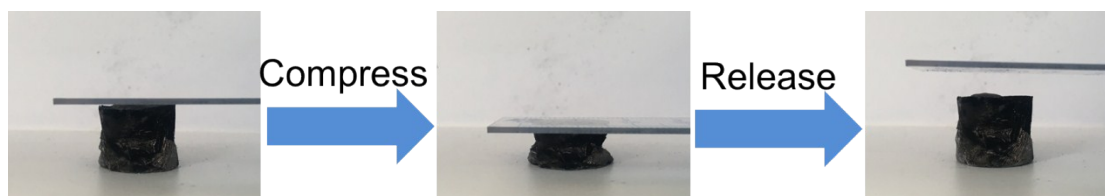


Figure S2. Digital images shows the compressibility of 3D MXene aerogel..