Screen versus cyclone for improved capacity and robustness for sidestream and mainstream deammonification

Tim Van Winckel ^{a,b,c}, Siegfried E. Vlaeminck ^{a,d*}, Ahmed Al-Omari ^b, Benjamin Bachmann ^e, Belinda Sturm ^c, Bernhard Wett ^f, Imre Takács ^g, Charles Bott ^h, Sudhir N. Murthy ⁱ and Haydée De Clippeleir ^b

- ^a Center of Microbial Ecology and Technology (CMET), Faculty of Bioscience Engineering, Ghent University, Gent, Belgium
- ^b District of Columbia Water and Sewer Authority, Blue Plains Advanced Wastewater Treatment Plant, 5000 Overlook Ave, SW Washington, DC 20032, USA
- ^c Department of Civil, Environmental and Architectural engineering, The University of Kansas, KS, USA
- ^d Research Group of Sustainable Energy, Air and Water Technology, Department of Bioscience Engineering, University of Antwerp, Antwerpen, Belgium
- ^e Department of Microbiology; University of Innsbruck, Austria
- f ARA consult GmbH, Austria
- g Dynamita SARL, France
- ^h Hampton Roads Sanitation District, VA, USA
- i New Hub, VA, USA
- * Corresponding author: siegfried.vlaeminck@uantwerpen.be

Supplemental A:

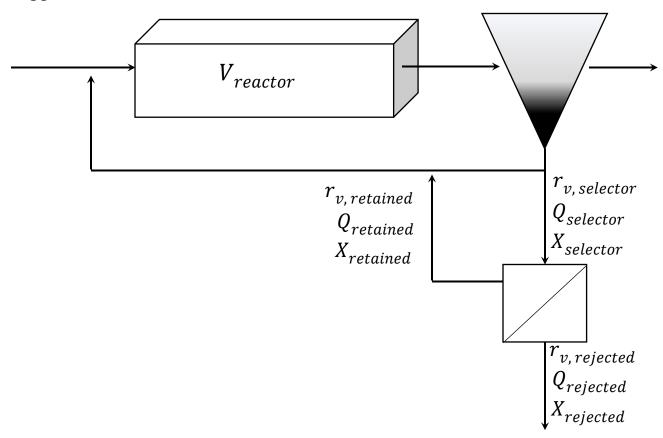


Figure A1. Basic schematic of a wastewater treatment plant with external selector.