

Supplementary Information
for
Nutrient Recovery from Treated Wastewater by a Hybrid
Electrochemical Sequence Integrating Bipolar Membrane
Electrodialysis and Membrane Capacitive Deionization

Fei Gao^{a,b,c,#}, Li Wang^{a,#}, Jie Wang^b, Hongwei Zhang^b and Shihong Lin^{*a,d}

^a Department of Civil and Environmental Engineering, Vanderbilt University, Nashville, Tennessee 37235-1831, United States

^bState Key Laboratory of Separation Membranes and Membrane Processes, Tianjin Polytechnic University, Tianjin 300387, China


^cSchool of Environmental Science and Engineering, Tianjin University, Tianjin 300072, China

^dDepartment of Chemical and Biomolecular Engineering, Vanderbilt University, Nashville, Tennessee 37235-1604, United States

[#]These authors contribute equally.

Corresponding author: Shihong Lin, shihong.lin@vanderbilt.edu; +1 (615)-322-7226

Figure S1. MCDI Cell Structure

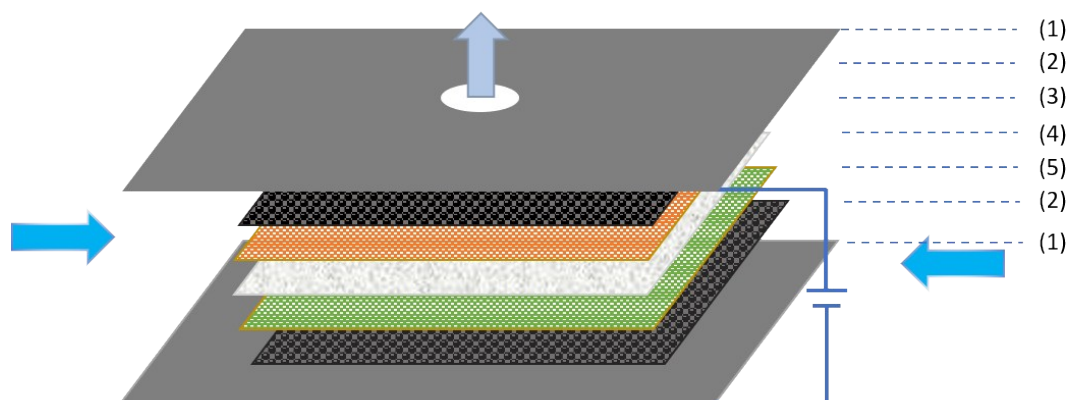

- (1) Current collector**
- (2) Carbon electrode**
- (3) Anion-exchange membrane (AEM)**
- (4) Spacer**
- (5) Cation-exchange membrane (CEM)**

Figure S1. Schematic of one MCDI cell assembly. The MCDI stack used in our experiments was composed of four such assemblies firmly compacted in an acrylic housing.