

Supporting Information

Optimized Performance III-Nitride-Perovskite-Based Heterojunction Photodetector via Asymmetric Electrode Configuration

Somak Mitra^a, Mufasila Mumthaz Muhammed^a, Norah Alwadaï^{ab}, Dhaifallah.R. Almalawi^a, Bin Xin^a, Yusin Pak^a, , Iman S. Roqan^{a*}

^aKing Abdullah University of Science and Technology (KAUST), Physical Sciences and Engineering Division, Thuwal 23955-6900, Saudi Arabia.

^bDepartment of Physics, Princess Nourah bint Abdulrahman University (PNU), Riyadh 11671, Saudi Arabia.

Section 1: SEM cross section image

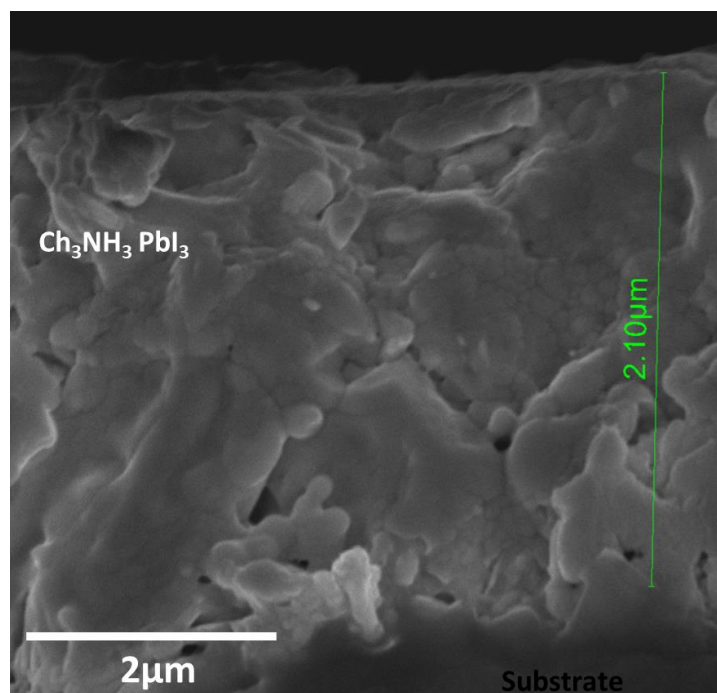


Figure S1: SEM cross-section image of the $\text{CH}_3\text{NH}_3\text{PbI}_3$ film spray coated in Al sheet.