

Supplementary Material

**Enhancement of sludge electro-dewaterability during
biological conditioning**

Yingte Li^a, Yong Liu^a, Xiaoyan Yu^b, Qian Li^a, Rui Zhang^c, Shuting Zhang^{a, *}

^a*School of Environmental Science and Engineering, Tianjin University, Tianjin 300354, China*

^b*School of Energy and Chemical Engineering, Liaoning Technical University, Hu Ludao 125105, China*

^c*School of Energy and Safety Engineering, Tianjin Chengjian University, Tianjin 300384, China*

**Corresponding author: Shuting Zhang*

E-mail: zhangst@tju.edu.cn

Telephone: +86-22-87402148

Table S1

Summary of principal component regression.

	Estimate	Std. error	t value	Pr(> t)	
Intercept	44.7991	0.3421	130.956	<2E-16	***
Z_1^*	-1.8068	0.1801	-10.033	7.15E-07	***
Z_2^*	-1.7402	0.3204	-5.431	0.000207	***

*: Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

Residual standard error: 1.28 on 11 degrees of freedom; Multiple R-squared: 0.9221,

Adjusted R-squared: 0.9079; F-statistic: 65.08 on 2 and 11 DF, p-value: 8.02E-07

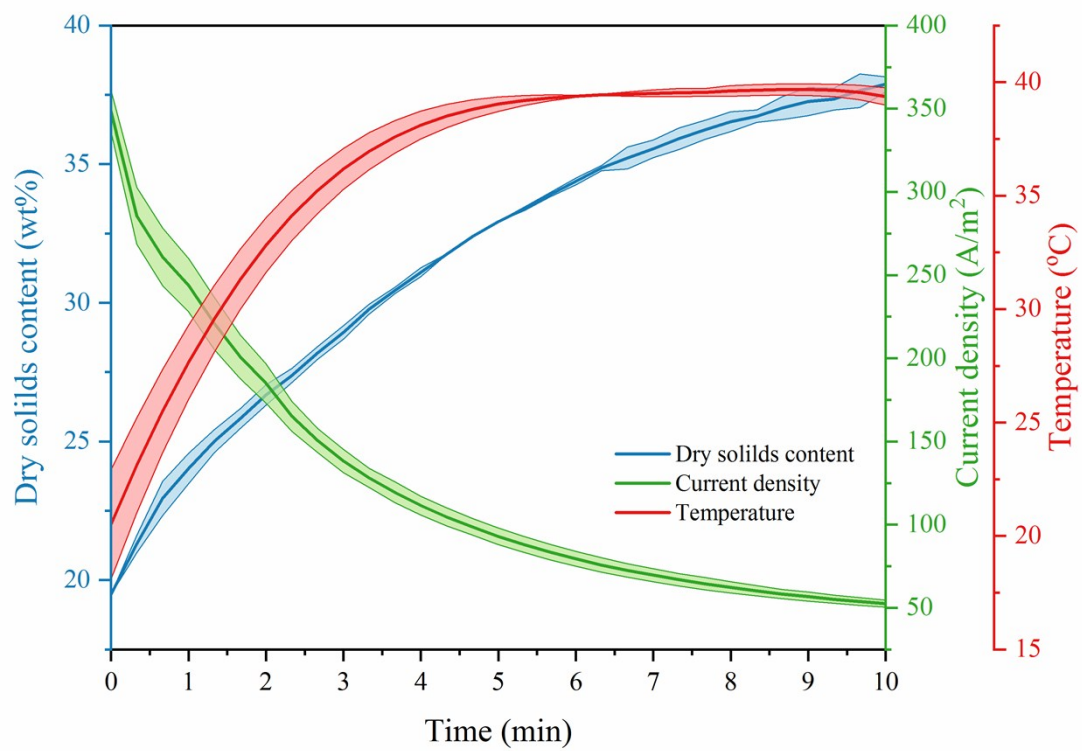


Fig. S1 Repeatability of EDW of raw sludge.