

Supporting Information

Curved Block Copolymer Nanodiscs: Structure Transformations in Cylindrical Nanopores Using the Nonsolvent-Assisted Template Wetting Method

Yu-Liang Lin,¹ Ming-Hsiang Cheng,¹ Chun-Wei Chang,¹ Chien-Wei Chu,¹ Chih-Ting Liu,¹ and Jiun-Tai Chen^{1,2*}

¹Department of Applied Chemistry, National Chiao Tung University, Hsinchu, Taiwan 30010

²Center for Emergent Functional Matter Science, National Chiao Tung University, Hsinchu, Taiwan 30010

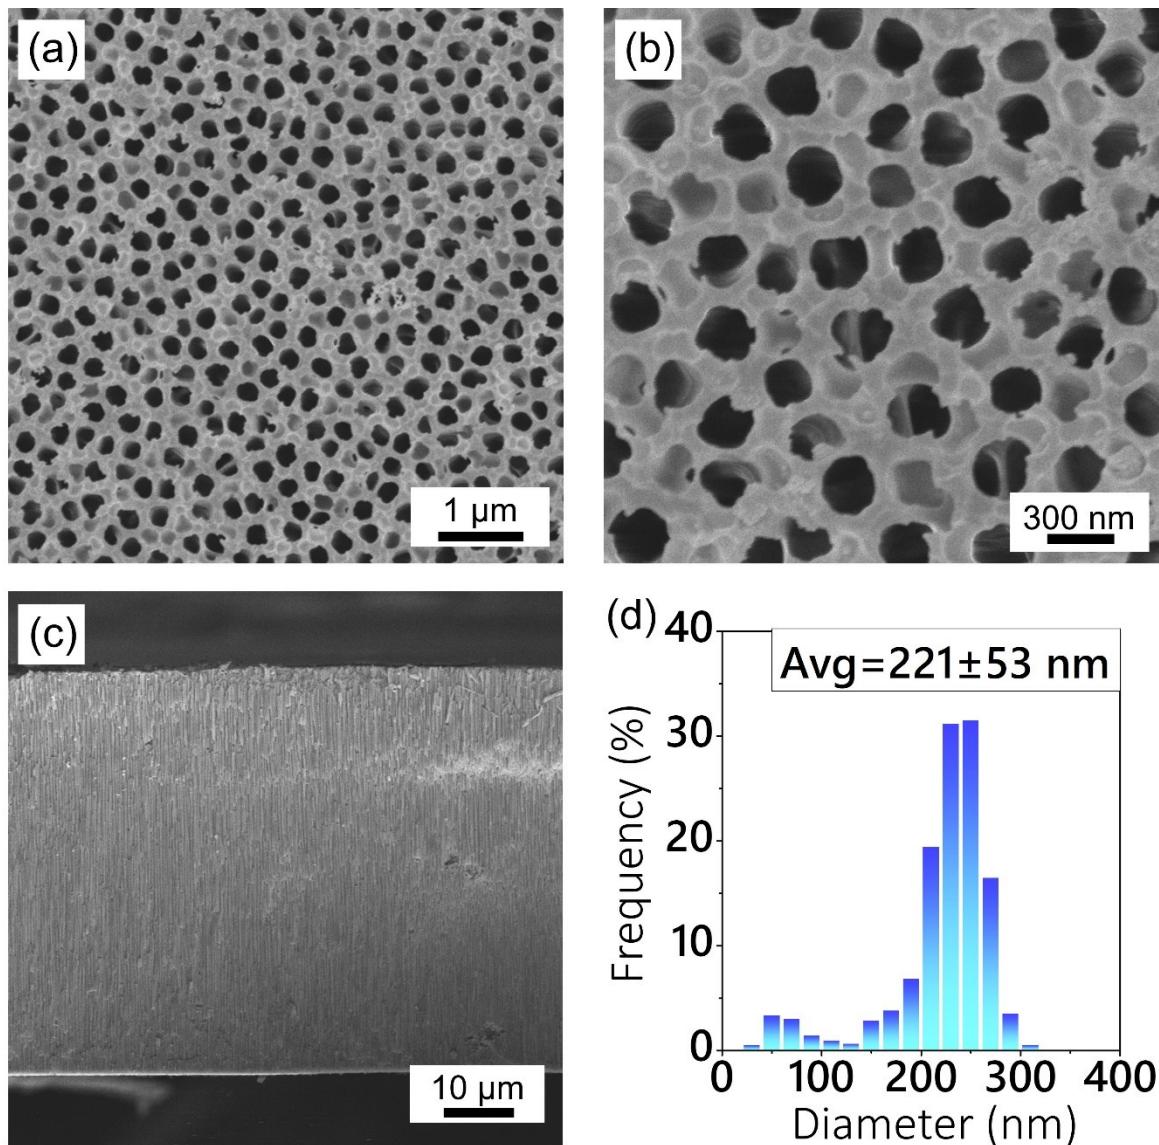


Figure S1. (a,b) SEM images with lower and higher magnifications of an AAO template. (c) Cross-sectional image of an AAO template. The thickness of the AAO template is $\sim 57 \mu\text{m}$. (d) Histogram of the pore sizes of the AAO template shown in (a). The average pore size of the AAO template is $\sim 221 \text{ nm}$.

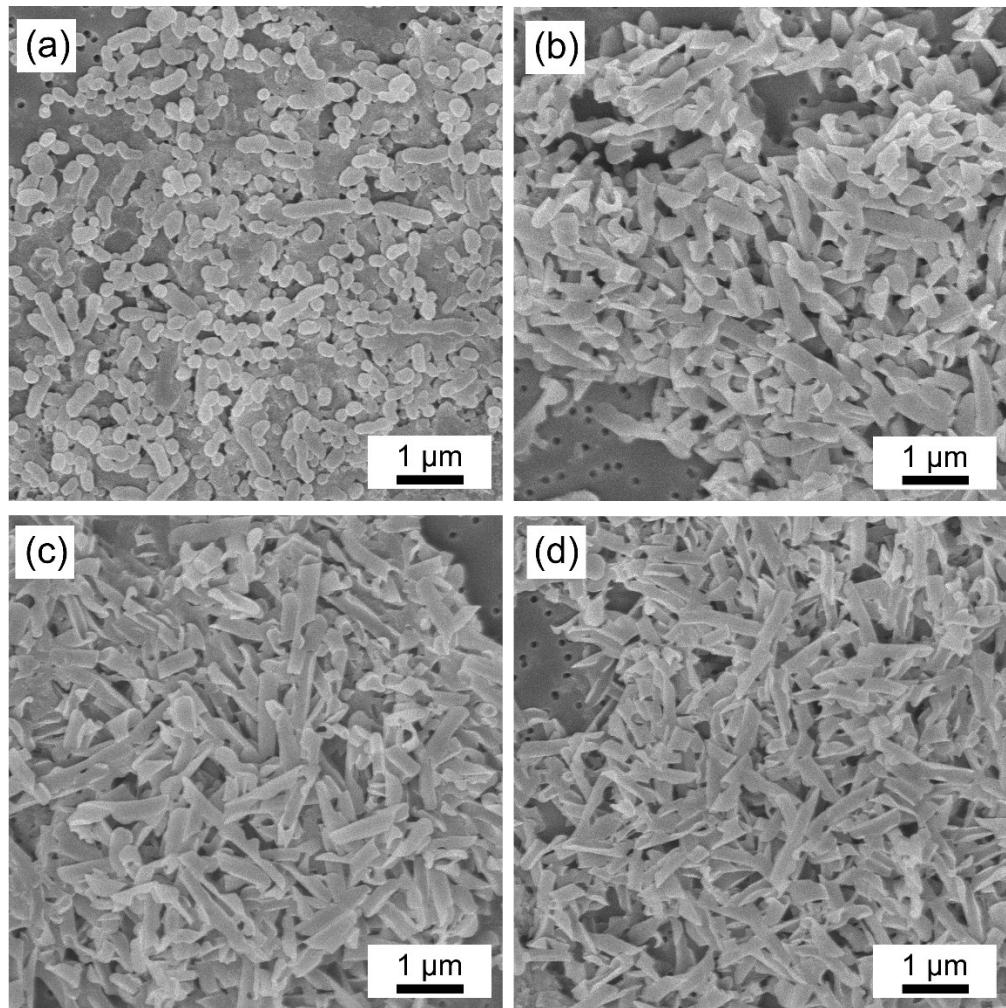


Figure S2. SEM images of PS-b-PDMS curved nanodiscs annealed at 130 °C for (a) 5, (b) 10, (c) 15, and (d) 30 min.

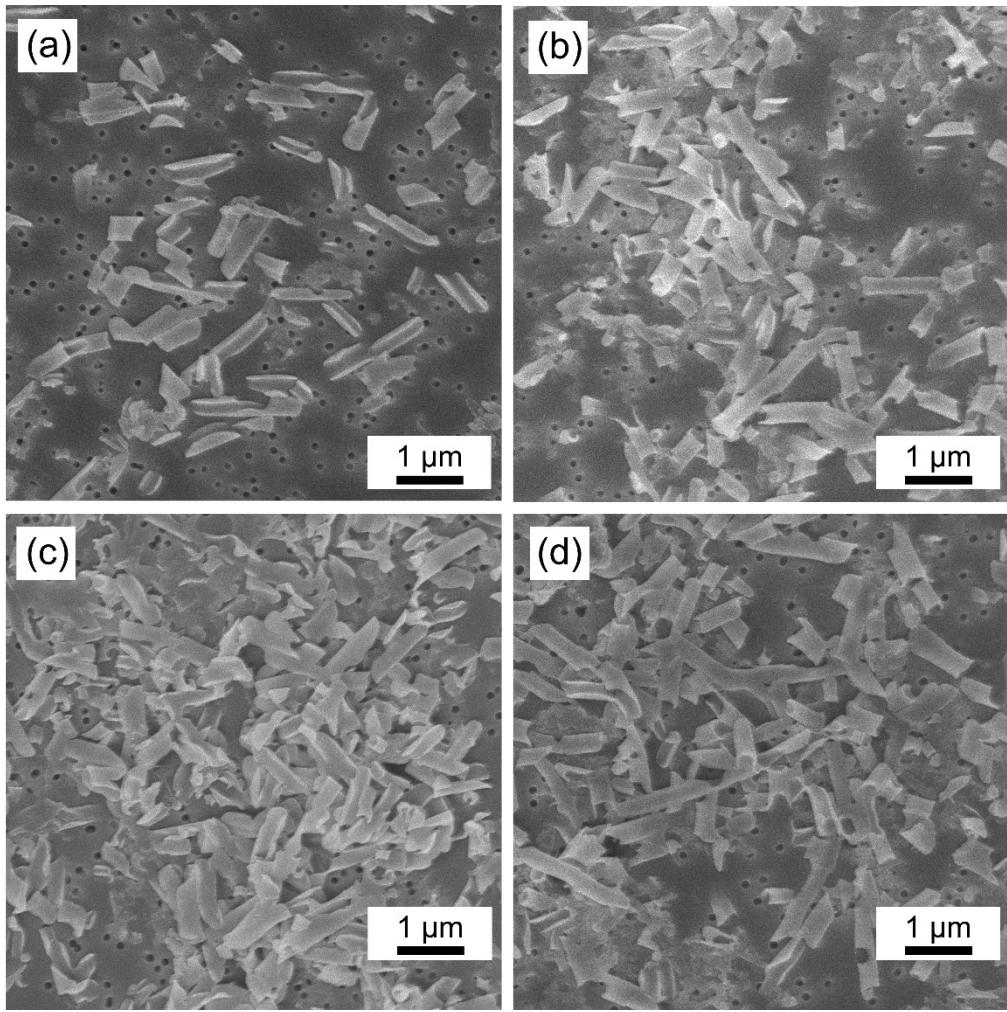


Figure S3. SEM images of PS-b-PDMS curved nanodiscs annealed at (a) 150, (b) 170, (c) 190, and (d) 210 °C for 10 min.