

Supporting Information

Biomimetic nonbiofouling polypyrrole electrodes grafted with zwitterionic polymer using gamma ray

**Jin-Oh Jeong^{a,b}, Semin Kim^c, Junggeon Park^a, Sanghun Lee^a, Jong-Seok Park^b,
Youn-Mook Lim^{b*}, and Jae Young Lee^{a*}**

^a School of Materials Science and Engineering, Gwangju Institute of Science and Engineering (GIST), Gwangju 500-712, Republic of Korea Address here.

^b Research Division for Industry & Environment, Advanced Radiation Technology Institute, Korea Atomic Energy Research Institute (KAERI), 29 Gumgugil, Jeongeup, 56212, Republic of Korea

^c Department of Biologic and Materials Science, University of Michigan, Ann Arbor, MI 48109, United States

* jaeyounglee@gist.ac.kr (J.Y.L.), ymlim71@kaeri.re.kr (Y.-M.L.)

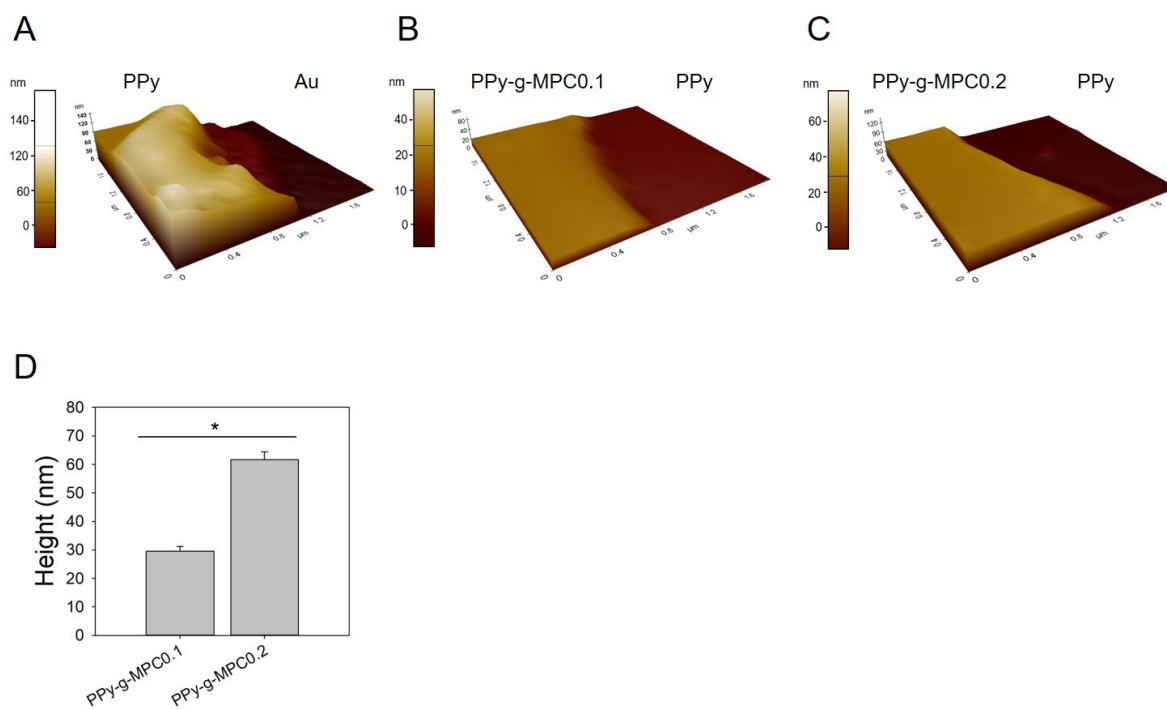


Figure S1. (A) AFM images at the interfaces of PPy, PPy-g-MPC0.1, and PPy-g-MPC0.2. (B) Coating thicknesses of MPC layers on PPy electrodes after surface modification.