

Supporting information

Management of thermally activated delayed fluorescence using a secondary electron accepting unit in thermally activated delayed fluorescent emitters

Ha Lim Lee¹, Kyung Hyung Lee¹, Jun Yeob Lee^{1*}, Wan Pyo Hong^{2*}

¹School of Chemical Engineering, Sungkyunkwan University

2066, Seobu-ro, Jangan-gu, Suwon-si, Gyeonggi-do, 440-746, Korea

²LG Chem, Ltd, LG Science Park, 30, Magokjungang 10-ro, Gangseo-gu, Seoul, 07796, Korea

Fax: (+) 82-31-299-4716

E-mail: leej17@skku.edu, whongw@lgchem.com

* To whom correspondence should be addressed


Key words : electron acceptor, delayed fluorescence, efficiency, emission color

List of Figures


Figure S1. The power efficiency-luminance plots of (a) TrzBFCz, (b) TrzCNBFCz and (c) Trz2CNBFCz device.

Figure S2. The current efficiency-luminance plots of (a) TrzBFCz, (b) TrzCNBFCz and (c) Trz2CNBFCz device.

(a)

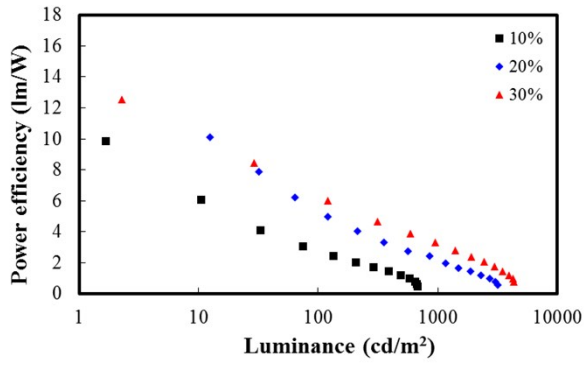

(b)

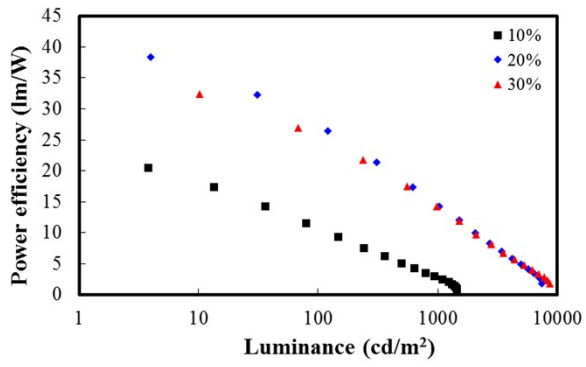

(c)



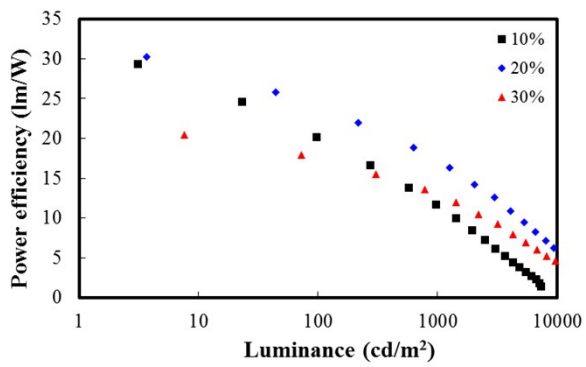


Figure S1.

(a)

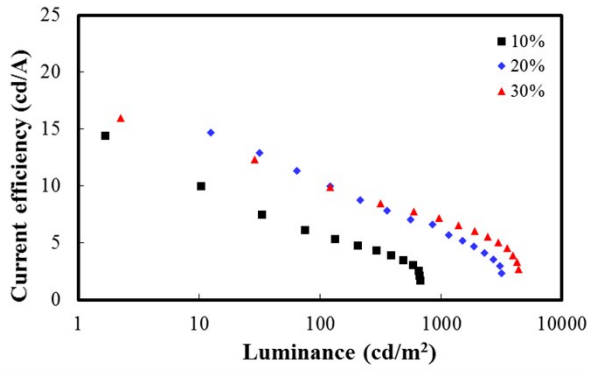

(b)

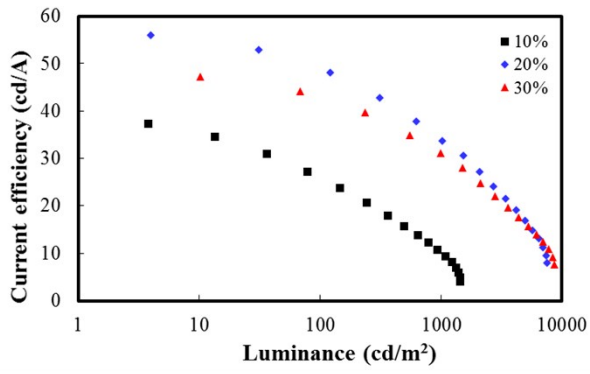

(c)

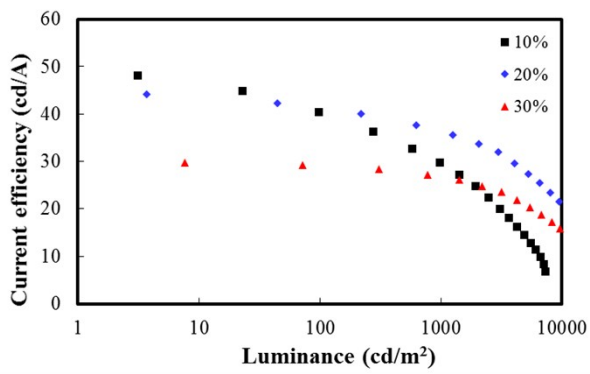


Figure S2.