

Supporting Information

Flexible and capsular polypyrrole nanotubular film based pseudo-capacitive electrode with enhanced capacitive properties enabled by Au nanoparticles doping

Zhenyu Li,^{a,b} Zhen Lei,^{a,b} Yongbin Wang,^b Yuanpeng Wu,^{*a,b,c} Meiling Guo,^b Yi He,^{*d} Jingyu Chen,^{*e} and Jinfeng Wang^{*e}

^a State Key Laboratory of Oil & Gas Reservoir Geology and Exploitation, Southwest Petroleum University, Chengdu, Sichuan 610500, China.

^b School of New Energy and Materials, Southwest Petroleum University, Chengdu, Sichuan 610500, China.

^c The Center of Functional Materials for Working Fluids of Oil and Gas Field, Southwest Petroleum University, Chengdu, Sichuan 610500, China

^d College of Chemistry and Chemical Engineering, Southwest Petroleum University, Chengdu, P. R. China.

^e Institute for Frontier Materials, Deakin University, Geelong/Melbourne, Australia
Email: ypwu@swpu.edu.cn, chemheyi@swpu.edu.cn, jingyu.chen@deakin.edu.cn & jinfeng.wang@deakin.edu.cn

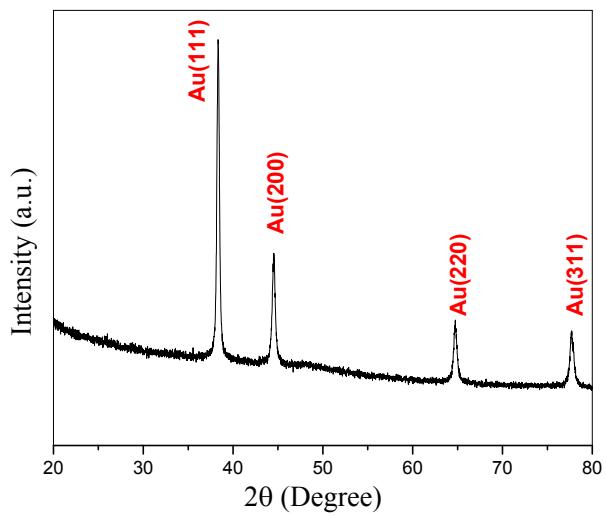


Figure S1. XRD of Au/PPy NM.