


Electronic supplementary information (ESI) for:

Reducing charge recombination losses in solid state dye sensitized solar cells: the use of donor-acceptor sensitizer dyes

Samantha Handa, Helga Wietasch, Mukundan Thelakkat,* James R. Durrant and Saif A. Haque,*

Photovoltaic current-voltage data

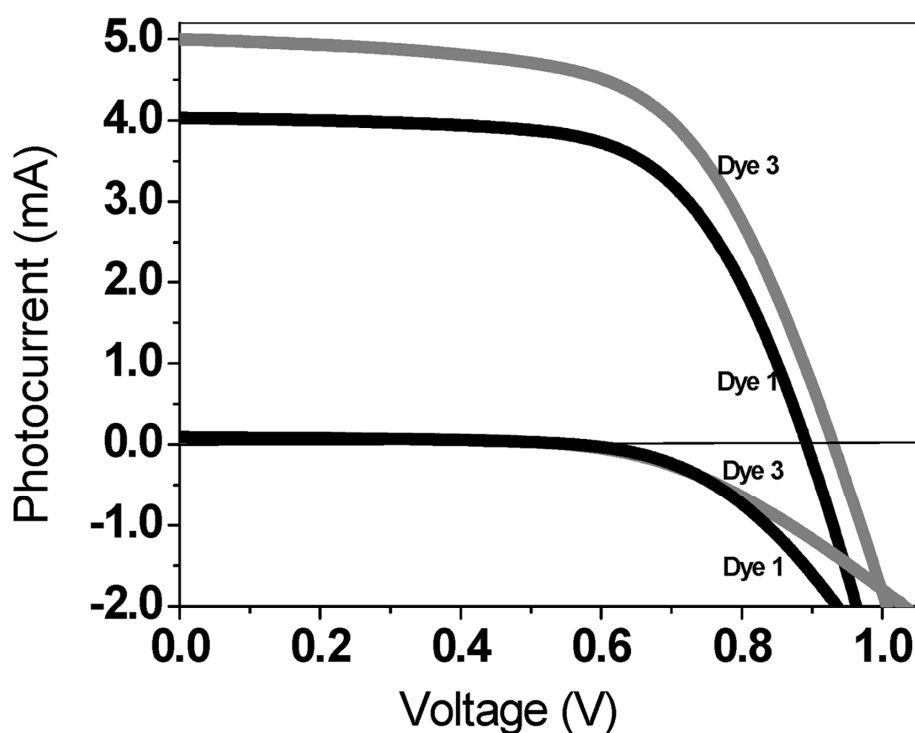

Current-voltage characteristics of typical dye sensitized solar cells fabricated employing dyes **1** and **3** sensitized on TiO₂. Data are shown for a film thickness of approximately 2.7 μm , cell active area 0.04 cm². Data shown were obtained under AM1.5 simulated sunlight, #100 mW⁻².