

One-pot synthesis and the electrochemical properties of nano-structured nickel selenide materials with hierarchical structure

Liwei Mi,^{*a} Qi Ding,^{a,b} Hui Sun,^a Weihua Chen,^{*b} Yingying Zhang,^a Chuntai Liu,^c
Hongwei Hou,^b Zhi Zheng^{*a} and Changyu Shen^c

^a Key Laboratory for Micro-Nano Energy Storage and Conversion Materials of Henan Province, Institute of Surface Micro and Nano Materials, Xuchang University, Henan 461000, P. R. China. Fax: +86-374-2968784; Tel: +86-374-2968784; E-mail: mlwzzu@163.com & zzheng@xcu.edu.cn

^b Department of Chemistry, Zhengzhou University, Henan 450001, P. R. China. E-mail: chenweih@zzu.edu.cn

^c National Engineering and Research Center for Advanced Polymer Processing Technology, Zhengzhou University, Henan 450001, P. R. China.

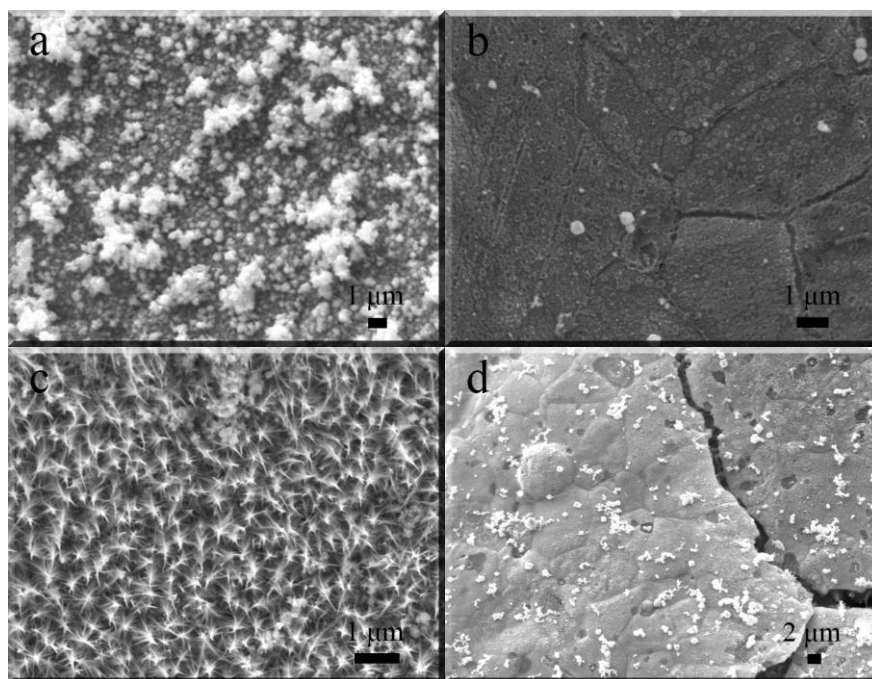


Figure S1 SEM images of different solvent system (a) 4 mL water and 12 mL ethylenediamine; (b) 8 mL water and 8 mL ethylenediamine; (c) 6 mL water and 10 mL ethylenediamine; (d) 12 mL water and 4 mL ethylenediamine.

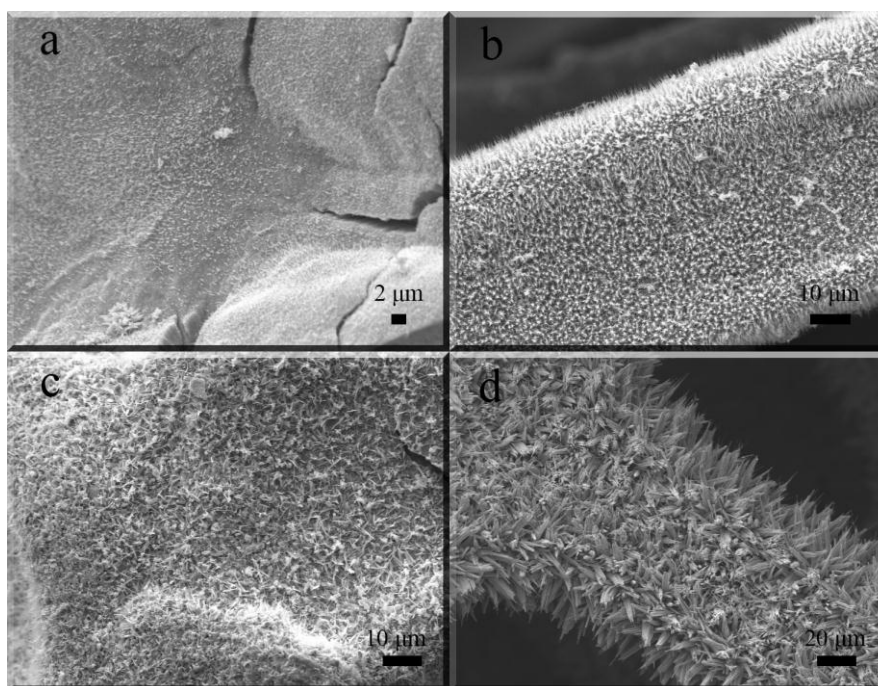


Figure S2 SEM images of different temperature (a) 140 °C; (b) 160 °C; (c) 180 °C; (d) 200 °C.