

Electronic Supplementary Information for

High performance fully bio-based epoxy thermoset from syringaldehyde-derived epoxy monomer cured by furan-derived amine

Hafezeh Nabipour,^a Xin Wang,^{a*} Lei Song^a and Yuan Hu^{a*}

^aState Key Laboratory of Fire Science, University of Science and Technology of China, 96

Jinzhai Road, Hefei, Anhui 230026, P. R. China.

*Corresponding authors. Tel/Fax: +86-551-63601664. E-mail address: yuanhu@ustc.edu.cn (Y. Hu), wxcmx@ustc.edu.cn (X. Wang).

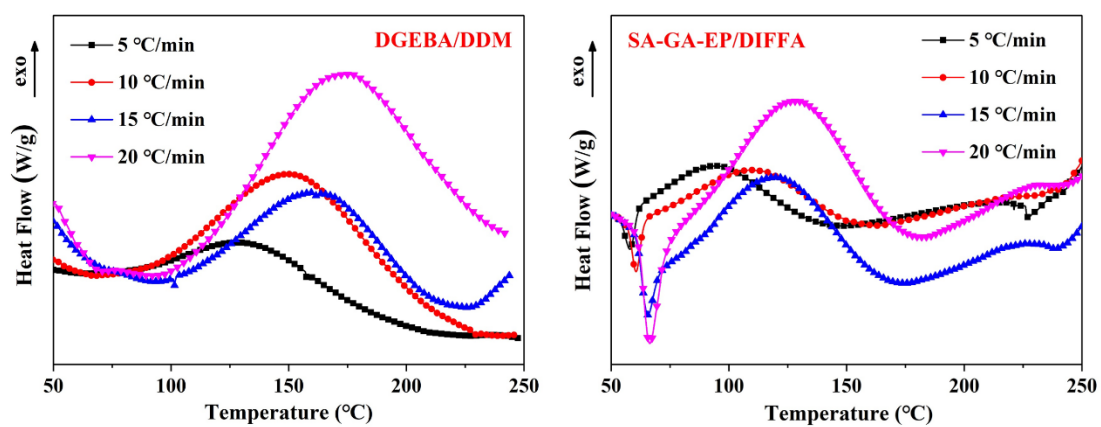


Fig. S1 DSC thermograms of DGEBA/DDM and SA-GA-EP/DIFFA at various heating rates.

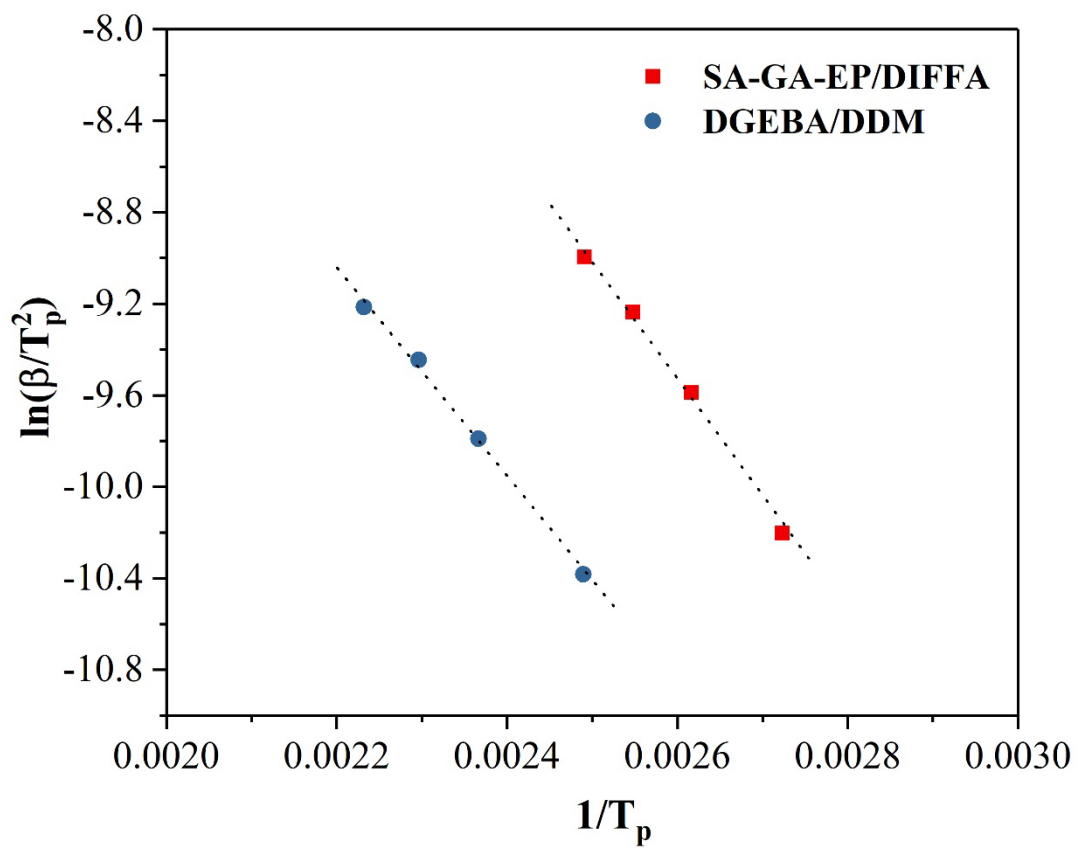


Fig. S2 Linear plots of $\ln(\beta/T_p^2)$ as a function of $1/T_p$ of DGBEA/DDM and SA-GA-EP/DIFFA based on Kissinger's method.

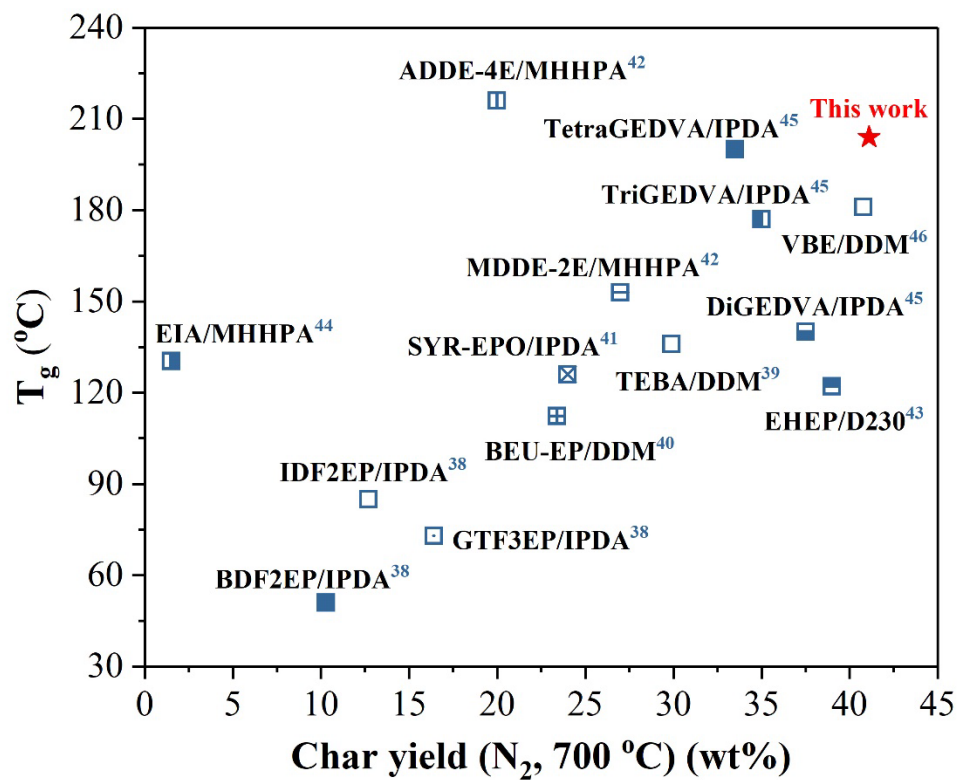


Fig. S3 Comparison of T_g and char yield between SA-GA-EP/DIFFA and previously reported results.