

Supporting information

Hydrothermal-template synthesis and electrochemical properties of Co_3O_4 /nitrogen-doped hemisphere-porous graphene composites with 3D heterogeneous structure

Haiyang Fan^{a, b}, Guiyun Yi^{a, b, *}, Qiming Tian^{a, b}, Xiuxiu Zhang^{a, b}, Baolin Xing^{b, c**},

Chuanxiang Zhang^{a, b}, Lunjian Chen^{a, b}, Yulong Zhang^{a, b}

^a Henan Key Laboratory of Coal Green Conversion, College of Chemistry and Chemical Engineering,

Henan Polytechnic University, Jiaozuo 454003, China

^b Collaborative Innovation Center of Coal Work Safety of Henan Province, Jiaozuo 454003, China

^c Henan Province Industrial Technology Research Institute of Resources and Materials, Zhengzhou

University, Zhengzhou 454001, China

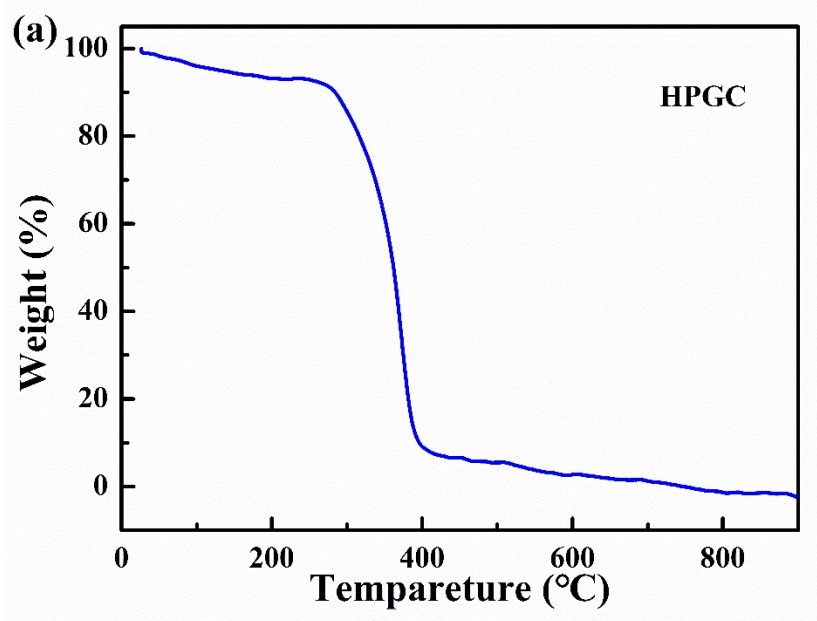


Figure S1. TGA curve of HPGC

* Corresponding author. E-mail address: ygyun@hpu.edu.cn (G. Yi).

** Corresponding author. E-mail address: baolinxing@hpu.edu.cn (B. X.).

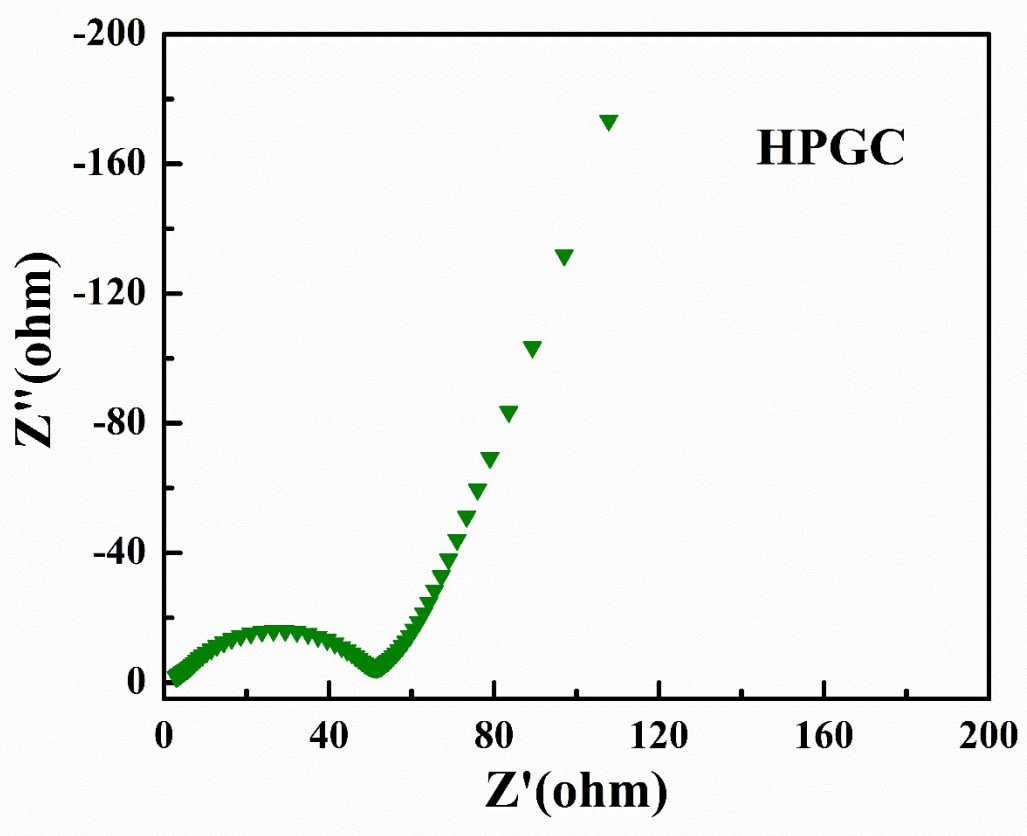


Figure S2. Nyquist plots of HPGC

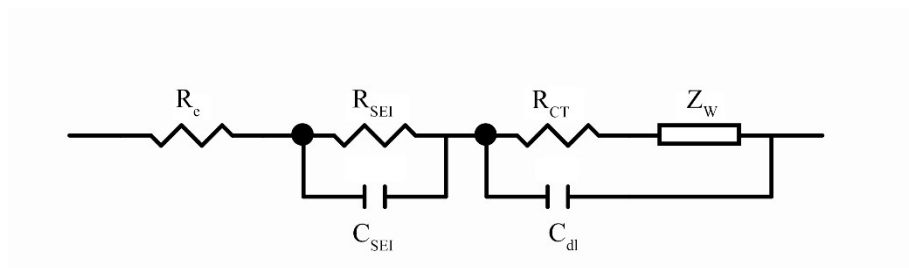


Figure S3. The equivalent circuit used for fitting impedance spectra