

Supporting Information

**Self-powered insulin patch pump with superabsorbent polymer as
biodegradable battery substitute**

¹Jiaying Shao, ²King Ho Holden Li, ³Ahjeong Son, ^{1,*}Beelee Chua


¹School of Electrical Engineering, Korea University, Seoul, Republic of Korea

² School of Mechanical and Aerospace Engineering, Nanyang Technological University, 50
Nanyang Avenue, Block N3, 639798 Singapore.

³Department of Environmental Science and Engineering, 52 Ewhayeodae-gil, Seodaemun-gu,
Ewha Womans University, Seoul 03760, Republic of Korea.

*Corresponding Author, Beelee Chua: Current address. 145 Anam-ro, Seongbuk-gu, Korea
University, Seoul 02841, Republic of Korea; Email. bchua@korea.ac.kr,
chuabeelee@gmail.com

15

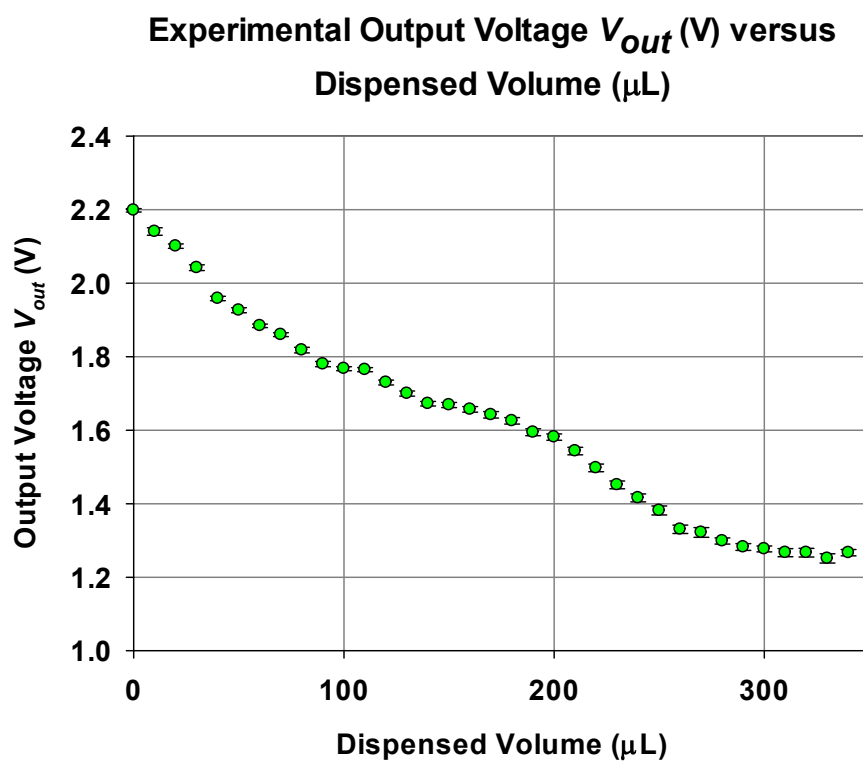

16

17

18 **Figure S1:** Experimental output voltage V_{out} (V) versus dispensed volume (μL) with standard
19 deviation.