

Supporting Information

Use of CO₂ and Nylon as the Raw Materials for Flammable Gas Production through the Catalytic Thermo-Chemical Process

Sangyoon Lee^{1,a}, Sungyup Jung^{1,a}, Kun-Yi Andrew Lin², Yiu Fai Tsang³, and Eilhann E. Kwon^{1,*}

¹ Department of Environment and Energy, Sejong University, Seoul 05006, Republic of Korea;

² Department of Environmental Engineering & Innovation and Development Center of Sustainable Agriculture & Research Center of Sustainable Energy and Nanotechnology, National Chung Hsing University, 250 Kuo-Kuang Road, Taichung, Taiwan;

³ Department of Science and Environmental Studies, The Education University of Hong Kong, Tai Po, New Territories, 999077, Hong Kong;

^a These authors are co-first authors because they equally contributed to this work
* Corresponding author: Eilhann E. Kwon, Ph.D.; email: ekwon74@sejong.ac.kr

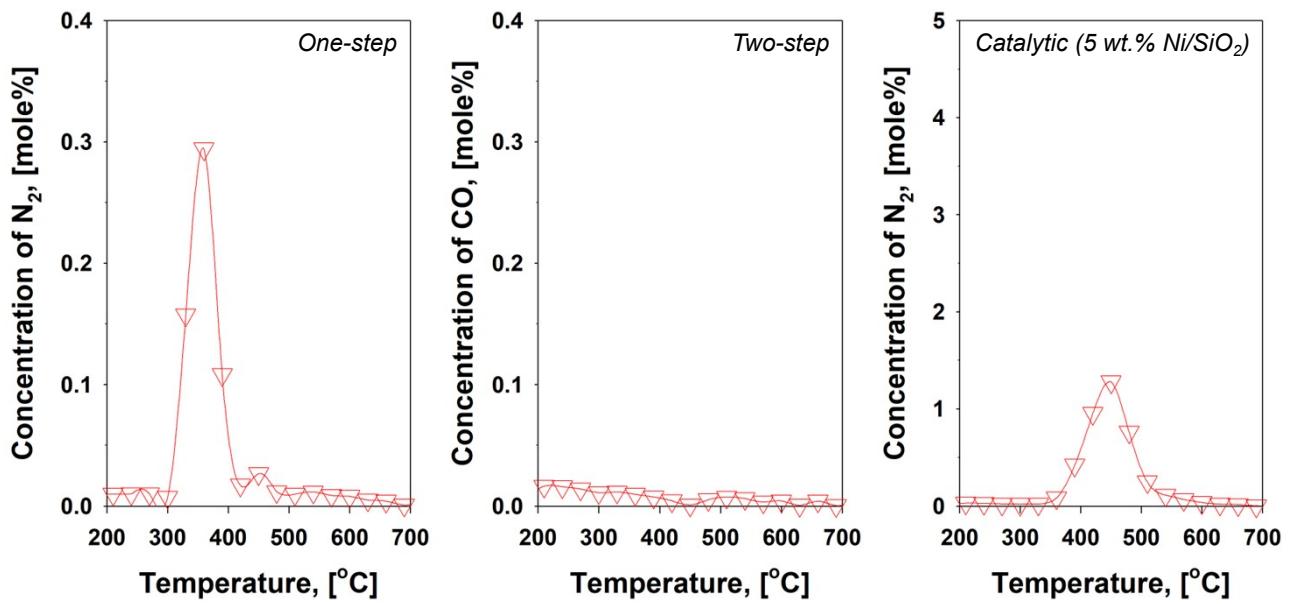


Fig. S1. Concentration of N_2 gas produced from one-step, two-step, catalytic pyrolysis of STW under CO_2 condition. X-axis represents the pyrolysis temperature of first heating block.