

## Supporting Information

### A Dye-Sensitized Solar Cells Based on Magnetic CoP@FeP<sub>4</sub>@Carbon Composite Counter Electrode Generated an Efficiency of 9.88%

Yu Du<sup>a</sup>, Gentian Yue<sup>a,b,\*</sup>, Zhang Lan<sup>b</sup>, Yueyue Gao<sup>a</sup>, Jihuai Wu<sup>b\*</sup>, Furui Tan<sup>a,\*</sup>

<sup>a</sup> Henan Key Laboratory of Photovoltaic Materials and Laboratory of Low-Dimensional Materials Science, Henan University, Kaifeng 475004, China

<sup>b</sup> Fujian Key Laboratory of Functional Materials, Huaqiao University, Xiamen 361021, P. R. China

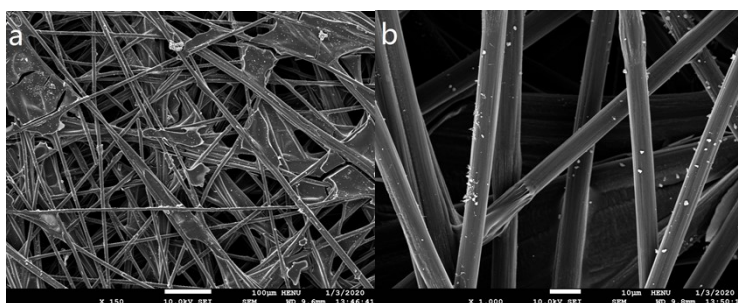


Figure S1 SEM images of (a,b) carbon paper.

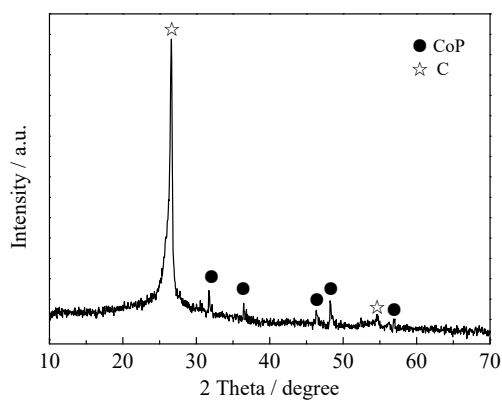
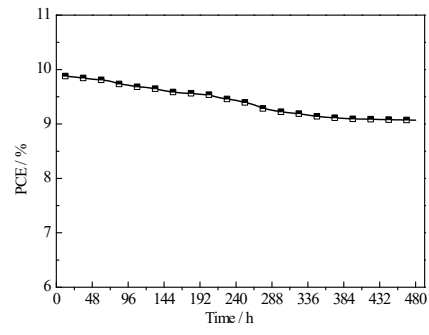


Figure S2 XRD patterns of the CoP @CP CE.

\* Corresponding author. E-mail address: [yuegentian@126.com](mailto:yuegentian@126.com); [jhwu@hqu.edu.cn](mailto:jhwu@hqu.edu.cn); [frtan@henu.edu.cn](mailto:frtan@henu.edu.cn).



**Figure S3** The long-term stability of the DSSC.